

Electrical

Standard: UL IEC
Rated Voltage: 600V 1000V
Rated Current: 27A 41A
Wire Range: 10-24AWG 0.2-6mm²
Withstanding Voltage: AC 2200V for one min

ORDER INFORMATION

D	B	C	5	T	R	7	5	0	L	-	2	4	0	N	X	X	E	L	B	-	0	1
											Series No.			No. of Poles (01~24P)			E:Green		B:Bag			




Mechanical




Stripping Length: 15~16mm
Operating temperature: -40°C ~ +105°C
Pin Dimensions: 1.2*1.2

Material

Housing: PA66, UL94V-0
Conductor: Copper Alloy
Conductor Plating: Sn Plated

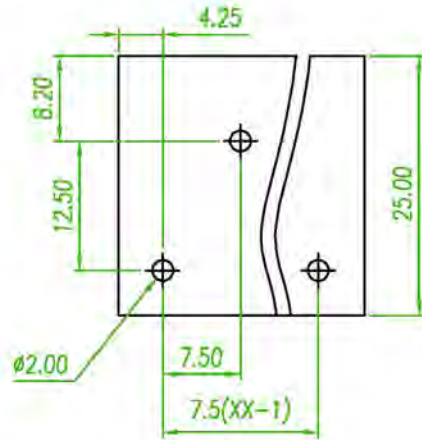

P.C.B. LAYOUT

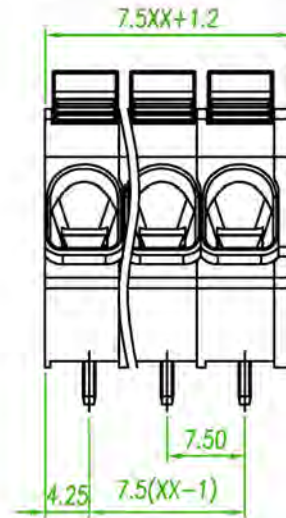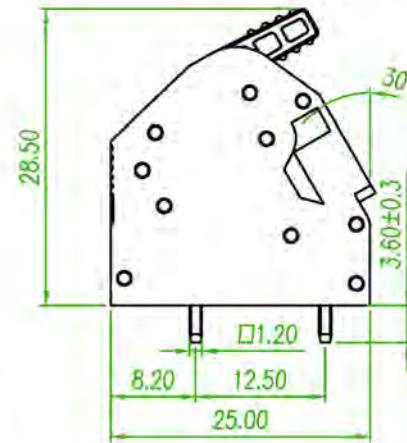

linear dimension(Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	

dubilier

品名 TITLE	7.5mm Terminal Block				頁數 Page	1/1
品號 PART NO.	DBC5TR750L-240NXXELB-01				繪圖 DRAWN	Alice 2021/06/02
圖號 DRAWING NO.	GN011-AZ224		版本 REV.	A	核對 CHECKED	Josh 2021/06/02
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Josh 2021/06/02
公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	