



DSA-88

Antifoam Compound
PDS

Description

DSA-88 is a robust antifoam oil at room temperature with acid and alkali resistance. Simple emulsification and dispersion. DSA-88 is very stable and Excellent defoaming ability.

Storage & packaging

When stored in its originally sealed packaging at 5°C - 40°C, this product may be stored for up to 8 months from its manufacturing date. Comply with the storage instructions marked on the packaging. Once past this expiration date, TAI COUNTY CHEMICAL no longer guarantees that the product meets the sales specifications. Product comes in 120 kg HDPE blue drums.

Characteristics

- Well, persistence defoaming
- Use slight amount
- Excellent dispersion
- DSA-88 is Easy to use

Applications

- Blending with DSA dispersant able produces a stable emulsion
- DSA-88 effective in anion type surfactant is defoaming
- Defoaming in printing processing, wastewater treatment, PCB&PWB processing and latex paint processing

Properties

Appearance	Milky white liquid
Active ingredient(%)	100.0%
Ionic type	Nonionic

Processing

- Please refer to Attachment 1~2 for detailed processes of DSA-88 emulsification and Attachment 3 for Brief overview of defoamer equipment
- Attachment 1. SAS-120 Ordinary Temperature Type Antifoam(30%) Production Process
- Attachment 2. SAH-120: Mesothermal Type Antifoam (30%) Production Process
- Attachment 3. Brief Overview Of Defoamer Equipment

Safety

This document does not contain the safety information required for the product. Please read the safety data sheet for this product before use.

The data provided above is to the best of our knowledge and experience and is without any warranty. Users should thoroughly test any application and independently conclude satisfactory performance before use.

TAI COUNTY CHEMICAL

TAIPEI Factory: NO. 91, Muscum Rd., Bali Township, Taipei County 24947, Taiwan
FACTORY REGISTRATION NO: 99.695614.00
YUNLIN Factory: NO. 1, Changqing St., Lunbei Township, Yunlin County 63745, Taiwan
FACTORY REGISTRATION NO: 09000892
Tel: 886-2-2610-4457
Fax: 886-2-2610-1363
E-MAIL : service@taicounty.com.tw
www.taicounty.com.tw

SAS-120 Defoamer Ingredients

DSA-88	111.4KG	
DSA Dispersant	9.4KG	
Water (1)	100KG (Temperature control required to 19 degrees)	
Water (2)	180.5KG (Room temprature water)	
CB-3 Thickening agent	1.34KG	
BW-20 Microbicide	1.2KG	
TS Dispersent	0.7KG	- Total production 400KG-

Recommended Production Process

Production steps	Time/Temperature/Speed
Add DSA-88 and DSA Dispersant to the tank, stir evenly until the temperature reaches 41°C.	20mins/41°C/37hz
Divide W(1)-1, totaling 77.7kg, into 7 portions. Slowly add each portion of 11.1kg every 5 minutes into the tank for blending and fusion.	35mins/36-3°C/37hz
Add 0.33kg of CB-3 thickening agent to the tank and stir evenly.	5mins/36°C/37Hz
Slowly add a total of 22.3kg of W(1)-2 to the tank, stirring until the water is completely blended. Afterward, add 0.13kg of CB-3 thickening agent.	10mins/35°C/37Hz
Slowly add a total of 13.4kg of W(2)-1 to the tank, stirring until the water is completely blended. Afterward, add 0.3kg of CB-3 thickening agent. (Turning point)	10-15mins/36°C/37Hz
Add BW-20 micorbicide to the tank and stir evenly. (add after the turning point)	5mins/35°C/37Hz
Add a total of 166.6kg of W(2) to the tank and stir until the water is completely blended.	15mins/33-35°C/37Hz
Add TS dispersant to the tank and stir evenly.	5mins/33-35°C/37Hz
Add 0.5kg of CB-3 thickening agent to the tank, stir evenly until the viscosity meets the standard.	15mins/33-35°C/37Hz
Discharge and filter the mixture to complete the production.	

Note: "Recommended viscosity range: 800-1200; adjust to meet specific requirements." "The production temperature should not exceed 45 degrees." "Follow specified materials; do not alter without authorization."

SAH-120 Defoamer Ingredients

DSA-88	107.4KG	
DSA Dispersant	13.4KG	
Water(1)	100KG (Temperature control required to 19 degrees)	
Water(2)	178.5KG (Room temprature water)	
CB-3 Thickening agent	1.34KG	
BW-20 Microbicide	1.2KG	
TS Dispersent	0.7KG	- Total production 400KG-

Recommended Production Process


Production steps	Time/Temperat ure/Speed
Add DSA-88 and DSA Dispersant to the tank, stir evenly until the temperature reaches 41°C.	20mins/41°C/37hz
Divide W(1)-1, totaling 77.7kg, into 7 portions. Slowly add each portion of 11.1kg every 5 minutes into the tank for blending and fusion.	35mins/36-39°C/37hz
Add 0.4kg of CB-3 thickening agent to the tank and stir thoroughly.	5mins/36°C/37Hz
Slowly add a total of 22.3kg of W(1)-2 to the tank, stirring until the water is completely blended.	10mins/35°C/37Hz
Add 0.33kg of CB-3 thickening agent to the tank and stir thoroughly. (Turning point)	10mins/36°C/37Hz
Add BW-20 micorbicide to the tank and stir thoroughly. (add after turning point)	5mins/35°C/37Hz
Add a total of 178.5kg of W(2) to the tank and stir until the water is completely blended.	15mins/33-35°C/37Hz
Add TS dispersant to the tank and stir evenly.	5mins/33-35°C/37Hz
Add 0.4kg of CB-3 thickening agent to the tank, stir thoroughly until the viscosity meets the standard.	15mins/33-35°C/37Hz
Discharge and filter the mixture to complete the production.	

Note: "Recommended viscosity range: 800-1200; adjust to meet specific requirements." "The production temperature should not exceed 45 degrees." "Follow specified materials; do not alter without authorization."

Brief Overview Of Defoamer Equipment

Emulsification Tank Dimensions

The size of the operation tank is also a crucial factor affecting emulsification. With a total production equivalent of 400KG for the defoamer, the tank is designed with a circular shape, having a **diameter of 120 cm and a depth of 200 cm**. It is important not to use an excessively wide and shallow emulsification tank. The operation of the tank should be complemented by an adjustable-speed homogenizer with adjustable lifting, allowing the product raw materials to blend effectively during the production process.

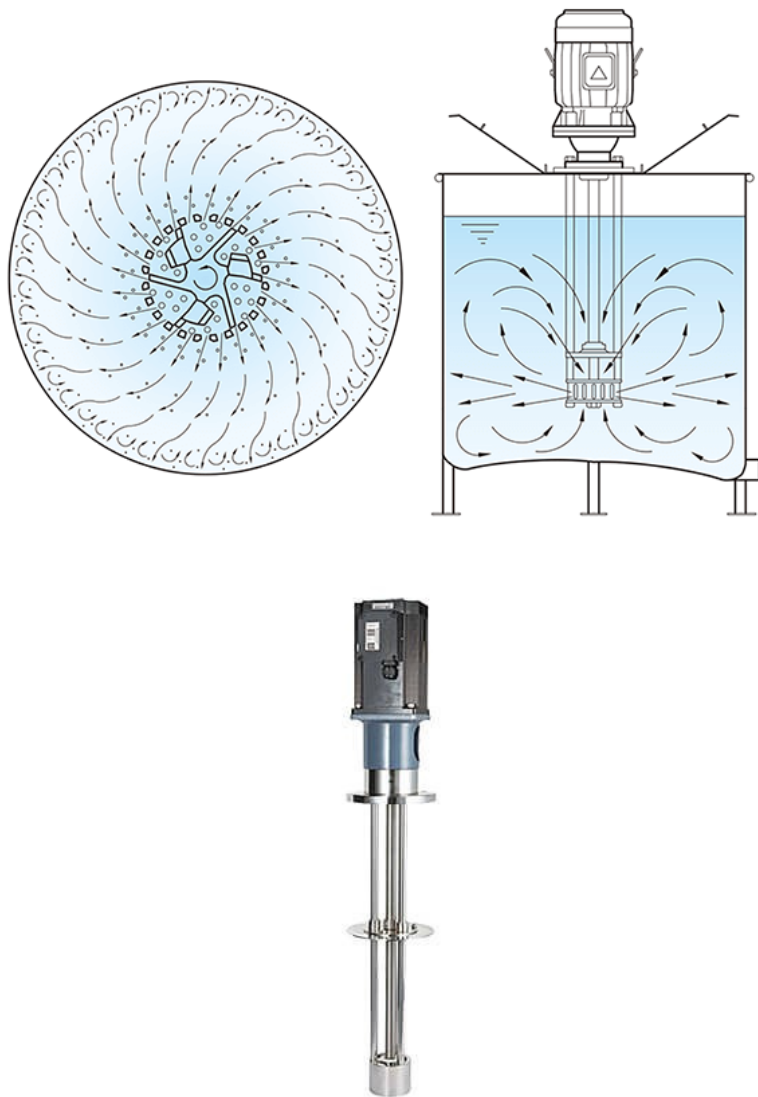

Adjustable-speed homogenizer schematic

Required appropriate lifting equipment to be used in conjunction with the emulsification tank.

If you have more questions, consult with us for technical support and guidance from our experts.