


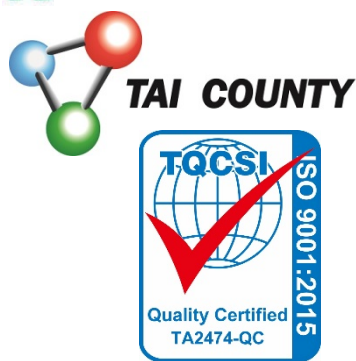

HS series HS-1500

Hydroxyl Silicone Fluid

2025/06/16 Draft. PDS

Description

HS-1500 is a hydroxyl-terminated silicone oil with a viscosity of 1500cps. It is colorless, non-toxic, and odorless, with physiological inertness, excellent oxidation stability, low flammability, low surface tension, non-corrosiveness, outstanding electrical insulation and weather resistance, low freezing point, and high shear resistance. It is used as a raw material in synthesis and daily-use products.

Characteristics


- Excellent thermal stability
- Good fire resistance
- Good dielectric properties
- Good antioxidant properties
- Good weather resistance

Properties

Appearance	Transparent liquid
------------	--------------------

Active ingredient(%)	100.0%
----------------------	--------

Viscosity, 25°C, cps	1300~1700
----------------------	-----------

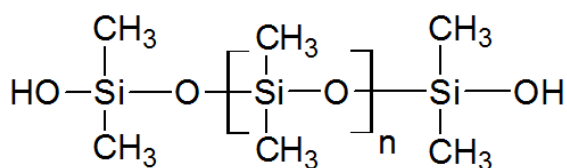

Safety

This document does not contain the safety information required for the product. Please read the safety data sheet for this product before use.

Storage & packaging

When stored in its originally sealed packaging at 5°C - 40°C, this product may be stored for up to 8 months from its manufacturing date. Comply with the storage instructions marked on the packaging. Once past this expiration date, TAI COUNTY CHEMICAL no longer guarantees that the product meets the sales specifications.

Product comes in 20、200 kg iron drums.

Applications

- HS series is a reactive linear bifunctional and hydroxyl end blocked silicone polymer. It is used to modify the physical properties and surface properties of various polymers.
- After reacting with the polymer formulation, it can improve the physical properties and surface properties of the polymer, such as improving surface slippage, anti-adhesion, surface scratch resistance, flexibility and hydrophobicity. Can be used in coatings, plastics, resins and other applications.
- Make the fabric smooth, soft and elastic. Also give fabric, paper, leather waterproof, water-and performance.
- Reacts with functional groups in the following polymers:
 - Epoxy
 - Ester
 - Carboxylic acid
 - Isohydrogenate