



ME series ME-350

Dimethyl Silicone Fluid

2025/06/16 Draft. **PDS**

Description

ME-350 is a polydimethylsiloxane (PDMS) with a viscosity of 350cps, commonly known as dimethyl silicone oil. It possesses excellent chemical inertness, allowing it to be used in most extreme working environments while maintaining exceptional stability. This makes the product applicable—and even indispensable—in many different fields.

Storage & packaging

When stored in its originally sealed packaging at 5°C - 40°C, this product may be stored for up to 24 months from its manufacturing date. Comply with the storage instructions marked on the packaging. Once past this expiration date, TAI COUNTY CHEMICAL no longer guarantees that the product meets the sales specifications.

Product comes in 20、200 kg iron drums.

Characteristics

- Excellent thermal stability
- Good fire resistance
- Good dielectric properties
- Good antioxidant properties
- Good weather resistance

Applications


- Electromechanical industry : insulating medium with heat tolerance, arc resistance, corrosion resistance, moisture resistance and dust resistance.
- Release agents : mould release of plastics, rubber and metal castings.
- Defoamer : low surface tension and insoluble in water. Used in petroleum, chemical, medical, pharmaceutical, food processing, textile, printing and dyeing, papermaking and other industries.
- Insulation, dust-proof and mildew-proof coating : dip-coating a layer on the surface of glass and ceramics and heat treatment to form a semi-permanent waterproof, mildew-proof and insulating film.
- Additives : Additives for paints and inks to improve printing quality.

Properties

Appearance	Transparent liquid
------------	--------------------

Active ingredient(%)	100.0%
----------------------	--------

Viscosity, 25°C, cps	250~450
----------------------	---------

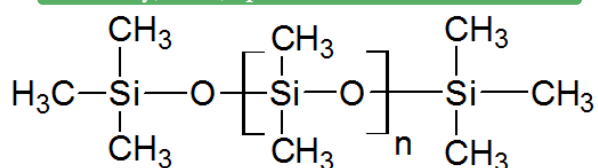

Safety

This document does not contain the safety information required for the product. Please read the safety data sheet for this product before use.

The information contained in this manual is given based on our current knowledge and good faith. It is indicative only and not binding, especially regarding the impact on third-party rights during product use. TAI COUNTY CHEMICAL ensures the products it sells conform to specifications. Only necessary preliminary tests can determine if a product is suitable for specific applications, and this information cannot replace such tests. Users are responsible for ensuring compliance with local legislation and obtaining necessary usage certificates and authorizations. Users are requested to check if they have the latest version of this document, and TAI COUNTY CHEMICAL is always ready to provide additional information to customers.


TAI COUNTY CHEMICAL

TAIPEI Factory: NO. 91, Museum Rd., Bali Township, Taipei County 24947, Taiwan
 FACTORY REGISTRATION NO: 99.695614.00
 YUNLIN Factory: NO. 1, Changqing St., Lunbei Township, Yunlin County 63745, Taiwan
 FACTORY REGISTRATION NO: 09000892
 Tel: 886-2-2610-4457
 Fax: 886-2-2610-1363
 E-MAIL : service@taicounty.com.tw
www.taicounty.com.tw

Workspace Details

Workspace name	install
Location	D:\GPC\install\
Comments	
Created by	tai county at 1:53:00 PM on Monday, May 8, 2023

Chromatogram Plot

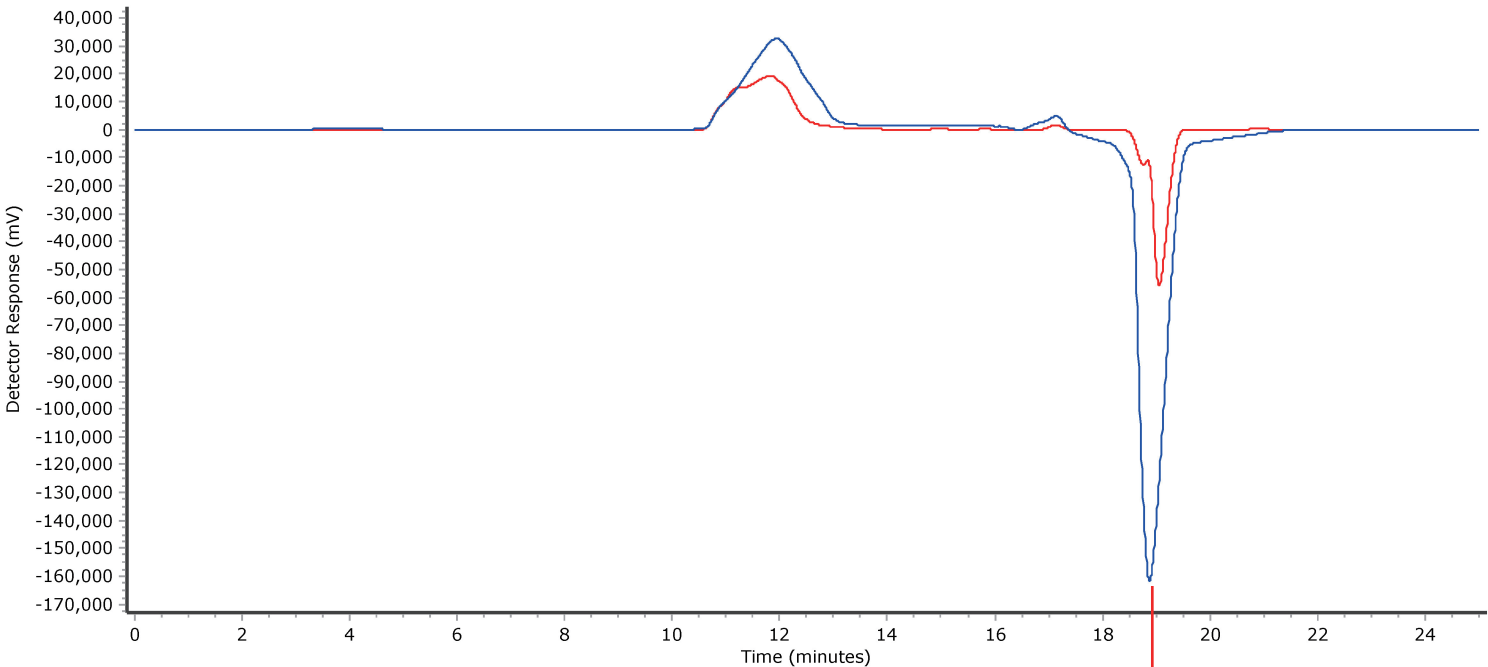

此為溶劑的訊號，請忽略
This is the solvent signal, please ignore it

Red紅色-Internationally Renowned Brand 國際知名大廠
Blue藍色-ME-350

使用GPC檢測能清楚了解到合成後的分子量分布，以及合成準確率，當波峰越窄越高，代表此合成的分子量越集中，合成準確率也越好，產品會更穩定，黏度變化低，物理性質單一。

根據GPC分析，ME系列產品在合成上的品質已經能與國際知名大廠的品質，相似度高達99%。

Using GPC testing, we can clearly understand the molecular weight distribution and synthesis accuracy. The narrower and higher the peak, the more concentrated the molecular weight, indicating better synthesis accuracy. This results in a more stable product with lower viscosity variation and consistent physical properties.

According to GPC analysis, the quality of the ME series synthesis is comparable to that of internationally renowned brands, with a similarity of up to 99%.