

Notification No.88 of MIC TEST REPORT

Applicant:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Manufacturer:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Product Description:	IEEE 802.11 a/b/g/n/ac/ax 1T1R USB+SDIO Wi-Fi Integrated Bluetooth 2.1+EDR/3.0/4.x/5.2/5.3
Brand Name:	N/A
Tested Model:	SKI.WB800D80S.1
Report No.:	JCF251201101-007
Received Date:	Dec. 01, 2025
Tested Date:	Dec. 01, 2025 - Dec. 30, 2025
Issued Date:	Dec. 30, 2025
Test Standards:	Notification No.88 of MIC, Annex 43 Article 2 Paragraph 1 of Item 19
Test Result:	Pass

Prepared By:  <u>Kennys Zhang/Engineer</u>	Date: Dec. 30, 2025
--	----------------------------

Reviewed By:  <u>Roger Li/Engineer</u>	Date: Dec. 30, 2025
--	----------------------------

Approved By:  <u>Talent Zhang/Engineer</u>	Date: Dec. 30, 2025
--	----------------------------



Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangzhou Jingce Testing Technology Co., Ltd. the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
/	/	Dec. 30, 2025	Original Report	/

Table of Contents

1. Test Report Declare	5
2. Summary Test Results	6
3. Test Laboratory	6
4. Equipment Under Test	7
4.1. Description of EUT	7
4.2. Channel List	7
4.3. Test Channel Configuration	8
4.4. Test Environment Conditions	8
4.5. The Worse Case Power Setting Parameter	9
4.6. Description of Available Antennas	9
5. Description of Test Setup	9
5.1. Accessory	9
5.2. Support Equipment	9
5.3. Test Setup	9
5.4. Setup Diagram for Tests	9
6. Measurement Uncertainty	10
7. Measuring Instrument and Software Used	10
8. Antenna Power and Tolerances for Antenna Power	11
8.1. Limit	11
8.2. Block Diagram of Test Setup	11
8.3. Test Procedure	11
8.4. Test Result	11
9. Frequency Tolerance	12
9.1. Limit	12
9.2. Block Diagram of Test Setup	12
9.3. Test Procedure	12
9.4. Test Result	12
9.5. Original Test Data	12
10. Occupied Frequency Bandwidth	16
10.1. Limit	16
10.2. Block Diagram of Test Setup	16
10.3. Test Procedure	16
10.4. Test Result	16
10.5. Original Test Data	17
11. Dwell time	20
11.1. Limit	20
11.2. Block Diagram of Test Setup	20
11.3. Test Procedure	20
11.4. Test Result	20
11.5. Original Test Data	20
12. Transmitter Spurious Emissions (conducted)	27
12.1. Limit	27
12.2. Block Diagram of Test Setup	27
12.3. Test Procedure	27
12.4. Test Result	27
12.5. Original Test Data	29
13. Secondary Radiated Emissions	45
13.1. Limit	45
13.2. Block Diagram of Test Setup	45
13.3. Test Procedure	45
13.4. Test Result	45
13.5. Original Test Data	46

14. Interference prevention function53
14.1. Measurement System Diagram53
14.2. Measuring Operation Procedure 53
14.3. Test Result 53

1. Test Report Declare

Applicant:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Manufacturer:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Product Name:	IEEE 802.11 a/b/g/n/ac/ax 1T1R USB+SDIO Wi-Fi Integrated Bluetooth 2.1+EDR/3.0/4.x/5.2/5.3
Brand Name:	N/A
Model Name:	SKI.WB800D80S.1
Difference Description:	N/A

We Declare:

The equipment described above is tested by Guangzhou Jingce Testing Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangzhou Jingce Testing Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests except as provided information by clients.

2. Summary Test Results

Clause	Test Item	Results
3.2 (2)	Antenna Power	PASS
3.2 (3)	Tolerances for Antenna Power	PASS
3.2 (4)	Frequency Tolerance	PASS
3.2 (5)	Transmission Rate	N/A
3.2 (7)	Occupied Frequency Bandwidth	PASS
3.2 (10)	Number of Carriers	N/A
3.2 (11)	Dwell Time	PASS
3.2 (6)	Spurious Emissions	PASS
---	Carrier Sense	N/A
3.6	Process Gain	N/A
3.3 (1)	Secondary Radiated Emissions	PASS

N/A is an abbreviation for Not Applicable.

3. Test Laboratory

Guangzhou Jingce Testing Technology Co., Ltd.
Add.: No.10, Hefeng No.1 street, Huangpu District, Guangzhou, Guangdong, People’s Republic of China
Association for Laboratory Accreditation(A2LA). Certificate Number: 6594.03
FCC Designation Number: CN1381. Test Firm Registration Number: 486550
IC Test Firm Registration Number: 31808
Conformity Assessment Body identifier: CN0173

4. Equipment Under Test

4.1. Description of EUT

EUT* Name:	IEEE 802.11 a/b/g/n/ac/ax 1T1R USB+SDIO Wi-Fi Integrated Bluetooth 2.1+EDR/3.0/4.x/5.2/5.3
Model Number:	SKI.WB800D80S.1
EUT Function Description:	Please refer to user manual of this device
Power Supply:	DC 3.3V
Sample No.:	251201101-01-01
Hardware Version:	N/A
Software Version:	N/A
Radio Specification:	Bluetooth V5.4
Operation Frequency:	2402 MHz - 2480 MHz
Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Data Rate:	1Mbps, 2Mbps, 3Mbps
Antenna Type:	FPC Antenna, MAX. Gain: 2.9 dBi

Note 1: EUT is the ab. of equipment under test.

Note 2: The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.

4.2. Channel List

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/


4.3. Test Channel Configuration

Tested mode, channel, information		
Mode	Channel	Frequency (MHz)
GFSK hopping on TX mode	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on TX mode	CH0 to CH78	2402 to 2480
8DPSK hopping on TX mode	CH0 to CH78	2402 to 2480
GFSK hopping off TX mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480
$\pi/4$ -DQPSK hopping off TX mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480
8DPSK hopping off TX mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480
8DPSK hopping off Rx mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480

4.4. Test Environment Conditions

/	Normal Conditions
Temperature range	21-25 °C
Humidity range	40-75%
Power supply	DC 3.3V

When EUT be operated at 10% from the normal supply voltage, the supply voltage of RF part was varied within 1%. All test cases were done under the normal supply voltage.

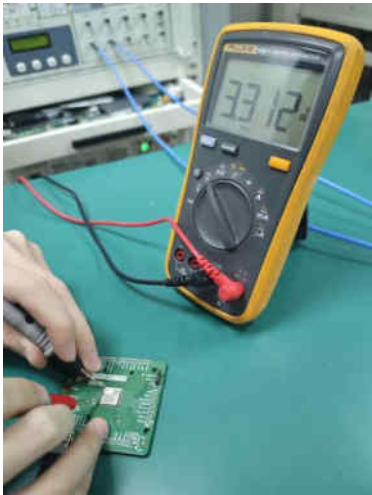Power supply voltage 3.3Vdc (Normal)	Power supply voltage 3.63Vdc (+10%)	Power supply voltage 2.97Vdc (-10%)
3.312V	3.312V	3.312V
Measurement point		
		

4.5. The Worse Case Power Setting Parameter

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		QATool_Dbg		
Modulation Type	Transmit Antenna Number	Test Software Setting Value		
		CH 00	CH 39	CH 78
GFSK	1	Default	Default	Default
$\pi/4$ -DQPSK	1	Default	Default	Default
8DPSK	1	Default	Default	Default

4.6. Description of Available Antennas

Test Mode	Transmit and Receive Mode	Description
GFSK	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
$\pi/4$ -DQPSK	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
8DPSK	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

5. Description of Test Setup

5.1. Accessory

Description of Accessories	Manufacturer	Model Number	Description	Remark
/	/	/	/	/

5.2. Support Equipment

Equipment	Brand Name	Model Name	P/N
PC	Lenovo	T480	/

5.3. Test Setup

The EUT can work in fixed frequency mode.

5.4. Setup Diagram for Tests



6. Measurement Uncertainty

Test Item	Uncertainty
Occupied Channel Bandwidth	1.1%
Uncertainty for radio frequency	$\pm 35.28\text{Hz}$
RF Output power, conducted	0.76dB
Power Spectral Density, Conducted	0.82dB
Unwanted Emissions, Conducted	3.09dB
Temperature	0.4°C
Humidity	1.3%
DC and Low frequency voltage	$\pm 0.006\text{V}$
Time	0.6%
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

7. Measuring Instrument and Software Used

TS Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Spectrum Analyzer	Keysight	N9030B	MY56320512	Jul. 31, 2025	Jul. 30, 2026
☒	Vector Signal Generator	Keysight	N5182B	MY57300334	Jul. 31, 2025	Jul. 30, 2026
☒	Signal Generator	Keysight	N5171B	MY57280639	Jul. 31, 2025	Jul. 30, 2026
☒	DC POWER	Keysight	E342A	MY59020356	Jul. 31, 2025	Jul. 30, 2026
☒	Control unit(Power sensor)	Tonscend	JS0806-2	/	Aug. 01, 2025	Jul. 31, 2026
Software						
Used	Description	Manufacturer		Name		Version
☒	Test software	TS+		JS1120-3		V3.3.10


Measuring Equipment Calibration Information		
Used	Calibration Company Abbreviation	Full Name of calibration company
☒	GRG	GRG METROLOGY & TEST GROUP CO.,LTD.
Calibration Information (Article 24-2, Paragraph 4 of the Radio Act)		
☐	(a) Calibration conducted by the National institute of information and Communications Technology (NICT) or a designated calibration agency under Article 102-18-1 of the Radio Act	
☐	(b) Calibration conducted based on the regulations of Article 135 or 144 of the Measurement Act	
☒	(c) Calibration conducted in foreign countries, which is equivalent to calibration conducted by the NICT or a designated calibration agency under Article 102-18-1 of the Radio Act	
☐	(d) Calibration, etc. Conducted by using measuring instruments and other facilities listed at the bottom of appended table 3 of the Radio Act, which is to have been calibrated as described in (a) through (c) above	

8. Antenna Power and Tolerances for Antenna Power

8.1. Limit

Limit	3mW/MHz
Tolerance	+20%

8.2. Block Diagram of Test Setup

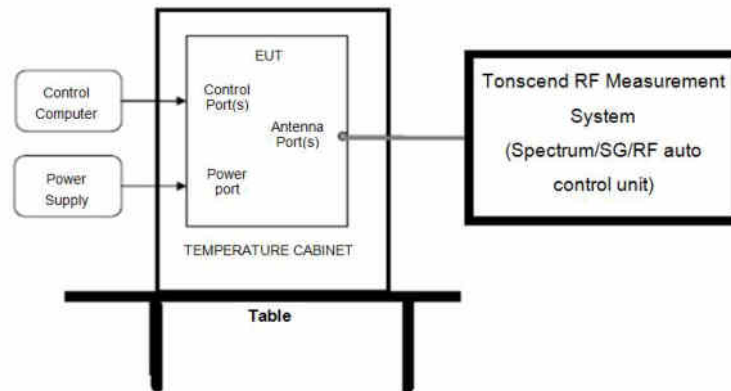

8.3. Test Procedure

- (1) Connect each EUT's antenna output to power sensor by RF cable and attenuator.
- (2) For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) is captured.

Note: The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.

8.4. Test Result

Antenna Power									
Test Condition	Test Mode	Ant.	Freq (MHz)	Result (dBm)	Result (mW)	90% BW (MHz)	Result (mW /MHz)	Limit (mW /MHz)	Verdict
NTNV	DH5	Ant1	Hop	6.25	4.2170	71.201	0.0592	≤3	PASS
	2DH5	Ant1	Hop	2.98	1.9861	71.051	0.0280	≤3	PASS
	3DH5	Ant1	Hop	3.00	1.9953	71.092	0.0281	≤3	PASS

Tolerance								
Test Condition	Test Mode	Ant.	Freq (MHz)	Power (mW /MHz)	Rated Power (mW /MHz	Result (%)	Limit (%)	Verdict
NTNV	DH5	Ant1	Hop	0.0592	0.1	-40.80	+20	PASS
	2DH5	Ant1	Hop	0.0280	0.1	-72.00	+20	PASS
	3DH5	Ant1	Hop	0.0281	0.1	-71.90	+20	PASS


EIRP							
Test Condition	Test Mode	Ant.	Freq(MHz)	Power (dBm/MHz)	EIRP(dBm/M Hz)	Limit(dBm/MHz)	Verdict
NTNV	DH5	Ant1	Hop	-12.27	-9.37	≤6.91	PASS
	2DH5	Ant1	Hop	-15.54	-12.64	≤6.91	PASS
	3DH5	Ant1	Hop	-15.52	-12.62	≤6.91	PASS

9. Frequency Tolerance

9.1. Limit

+/- 50 x 10⁻⁶ or less (50ppm)

9.2. Block Diagram of Test Setup



9.3. Test Procedure

(1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the channel under test.

Resolution BW: 10 kHz.

Video BW: 10 kHz.

Span: 1 MHz.

Detector: Peak.


Trace Mode: Max Hold.

(3) When the trace is complete, find the peak value of the power envelope and record the frequency.

9.4. Test Result

Test Condition	Test Mode	Ant.	Freq. (MHz)	Result (ppm)	Limit (ppm)	Verdict
NTNV	DH5	Ant1	2402	-1.24896	±50	PASS
			2441	-2.45801	±50	PASS
			2480	-2.41936	±50	PASS
	2DH5	Ant1	2402	-1.87344	±50	PASS
			2441	-2.45801	±50	PASS
			2480	-2.41936	±50	PASS
	3DH5	Ant1	2402	-1.87344	±50	PASS
			2441	-2.45801	±50	PASS
			2480	-2.41936	±50	PASS

9.5. Original Test Data

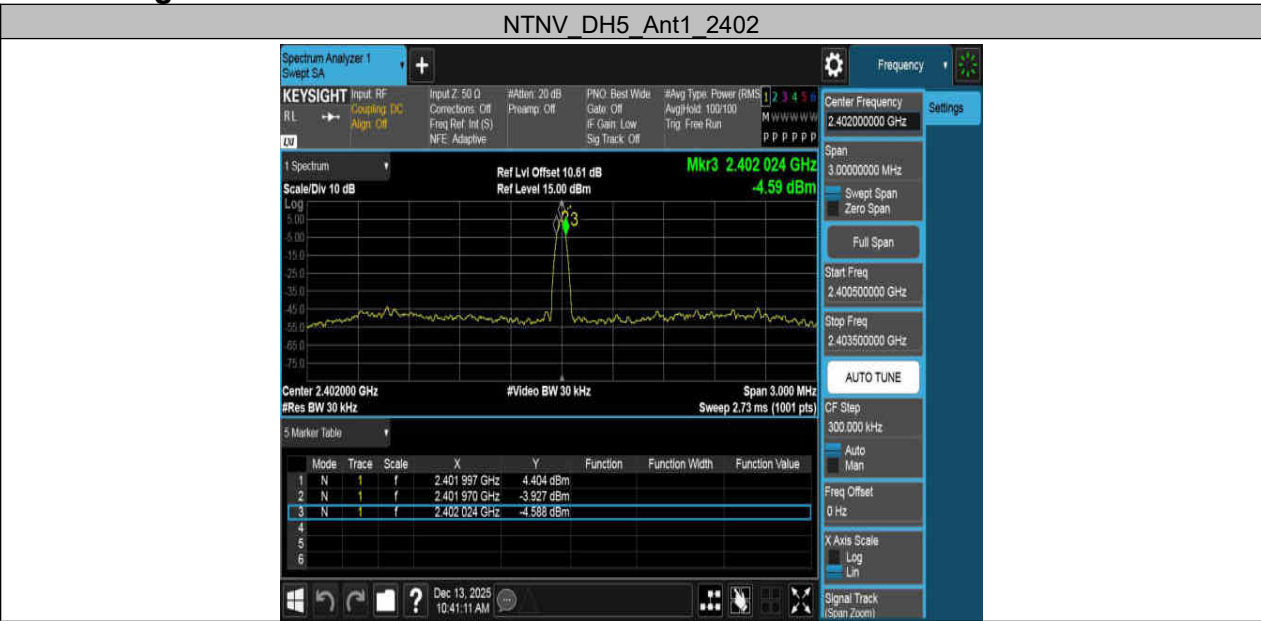







NTNV_3DH5_Ant1_2480




10. Occupied Frequency Bandwidth

10.1. Limit

Permissible value for occupied bandwidth using the FH system, a hybrid system combining DS and FH systems, or a hybrid system combining FH and OFDM systems shall be 83.5 MHz or less, while necessary bandwidth (minimum occupied bandwidth sufficient to ensure information transmission of required quality at a required transmission rate for the system used under specified conditions for a given emission type) using a system other than any of the above shall be 26 MHz or less.

10.2. Block Diagram of Test Setup



10.3. Test Procedure

(1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the channel under test.

Hopping off:

Resolution BW: 30 kHz

Video BW: 30 kHz

Hopping on:

Resolution BW: 1 MHz

Video BW: 1 MHz

Span: Wide enough to cover the complete power envelope of the signal of the EUT.

Detector: Peak.

Trace Mode: Max Hold.


(2) When the trace is complete, measure the occupied bandwidth (99% bandwidth) with spectrum analyzer's bandwidth measure function.


10.4. Test Result

Test Condition	Test Mode	Ant.	Freq. (MHz)	Result (MHz)	Limit (MHz)	Verdict
NTNV	DH5	Ant1	2402	1.078	≤83.5	PASS
			2441	1.087	≤83.5	PASS
			2480	1.076	≤83.5	PASS
	2DH5	Ant1	2402	1.498	≤83.5	PASS
			2441	1.495	≤83.5	PASS
			2480	1.496	≤83.5	PASS
	3DH5	Ant1	2402	1.498	≤83.5	PASS
			2441	1.492	≤83.5	PASS
			2480	1.492	≤83.5	PASS


Test Condition	Test Mode	Ant.	Freq. (MHz)	Result (MHz)	Limit (MHz)	Verdict
NTNV	DH5	Ant1	Hop	78.192	≤83.5	PASS
	2DH5	Ant1	Hop	78.361	≤83.5	PASS
	3DH5	Ant1	Hop	78.453	≤83.5	PASS

10.5. Original Test Data

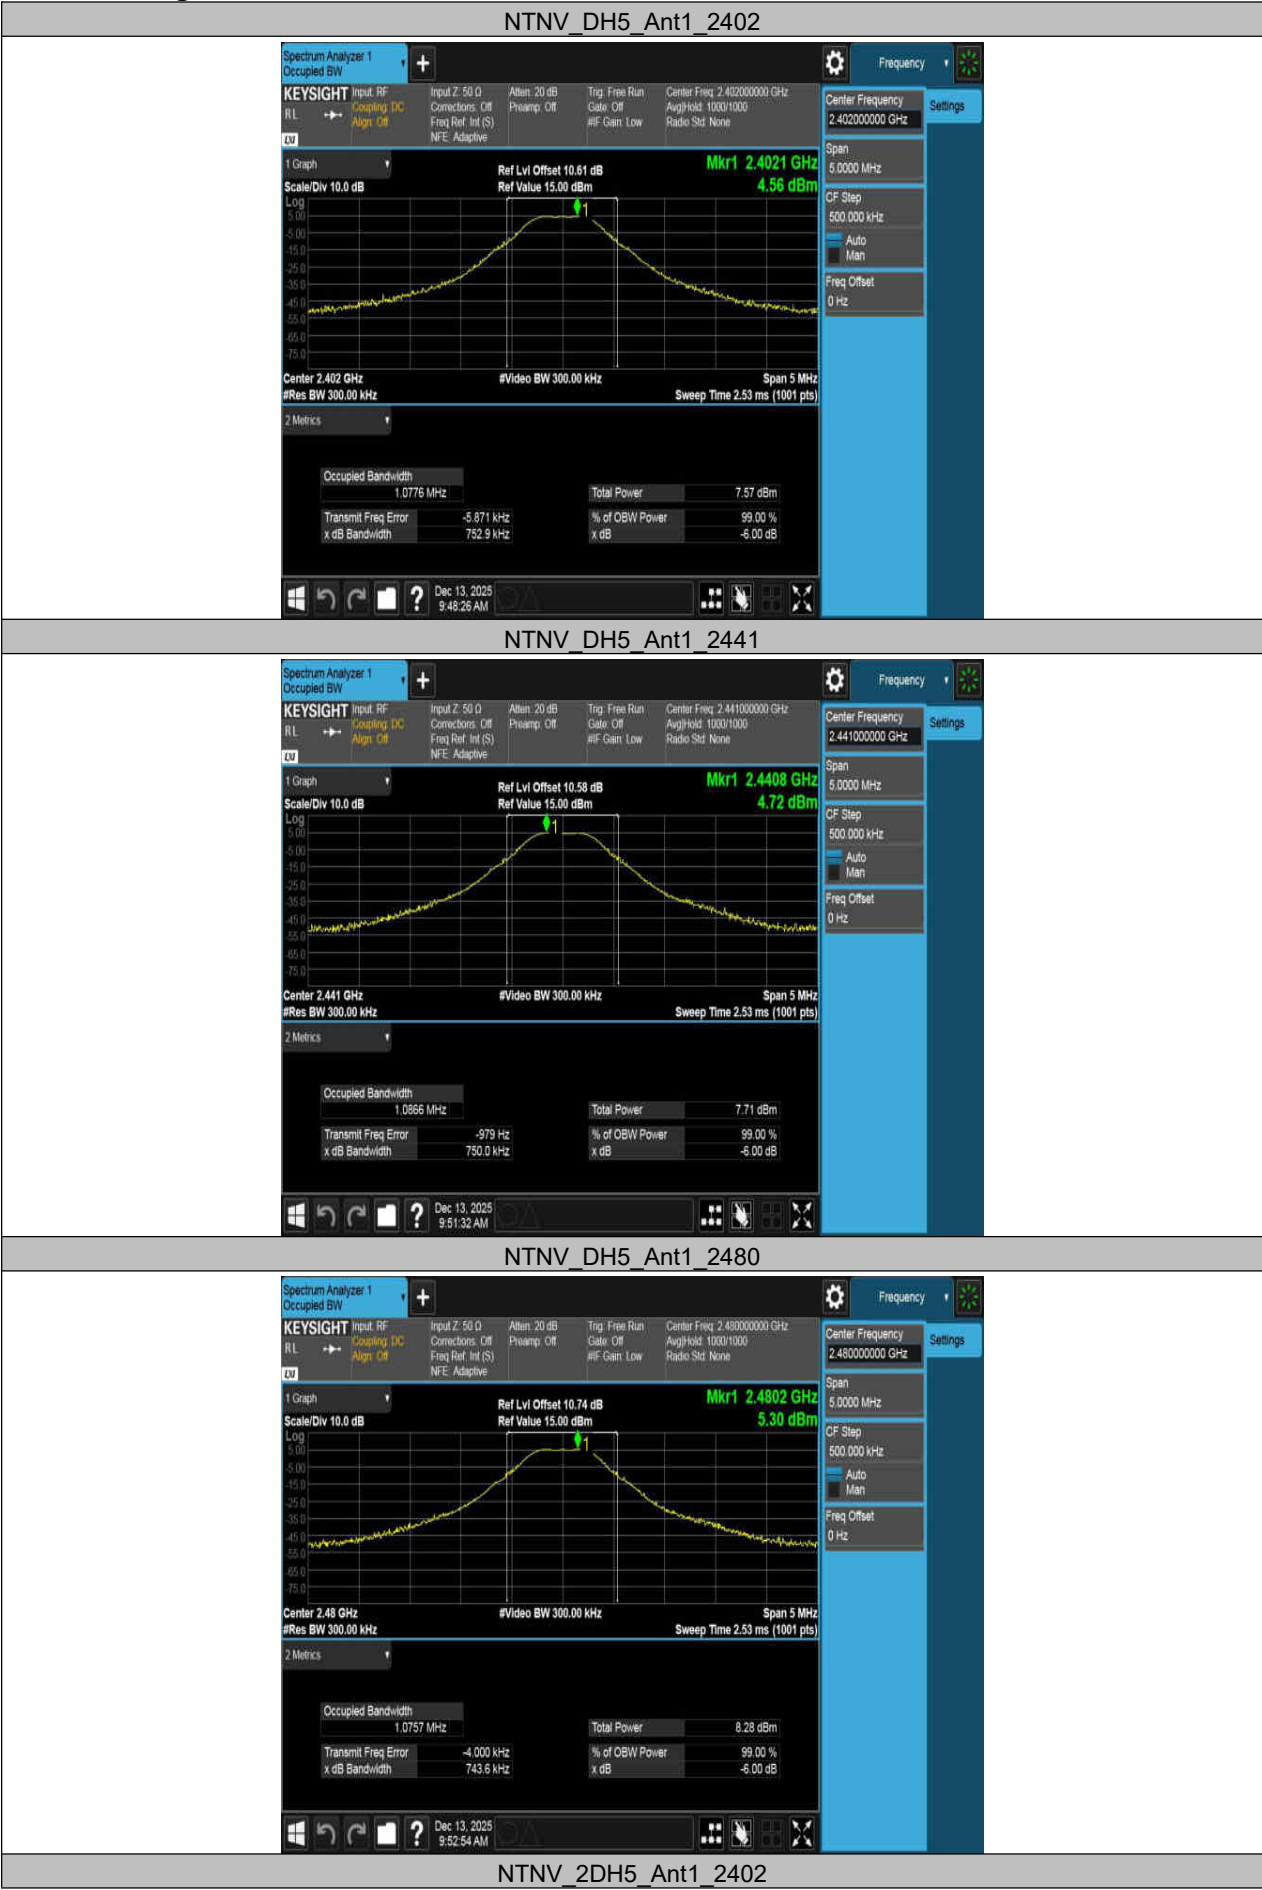

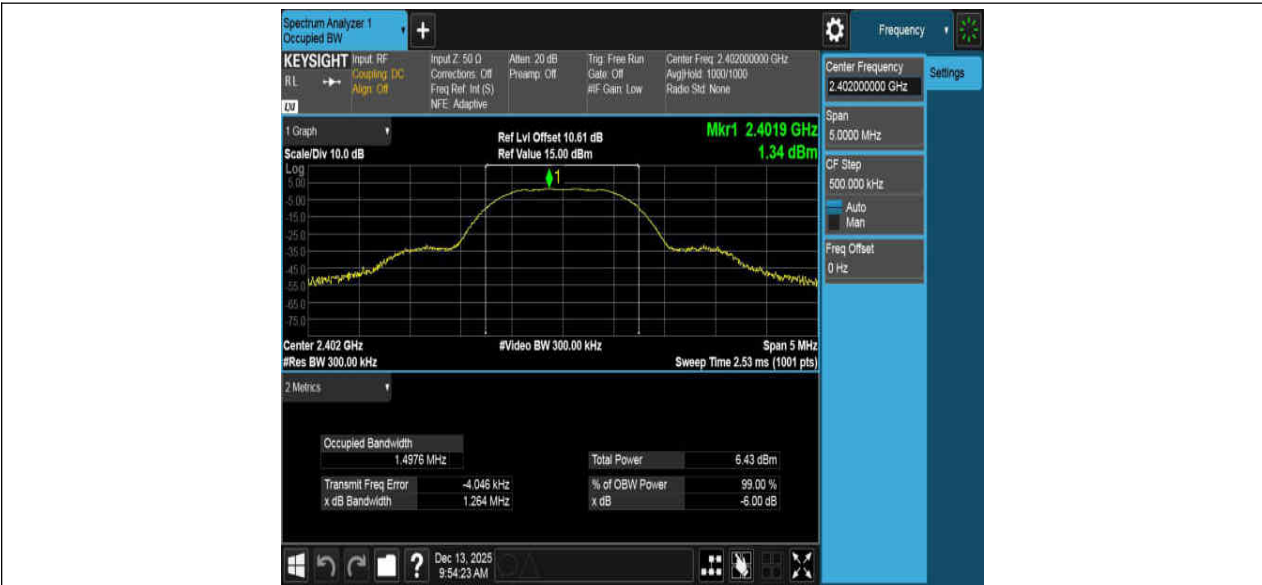


NTNV_2DH5_Ant1_2441

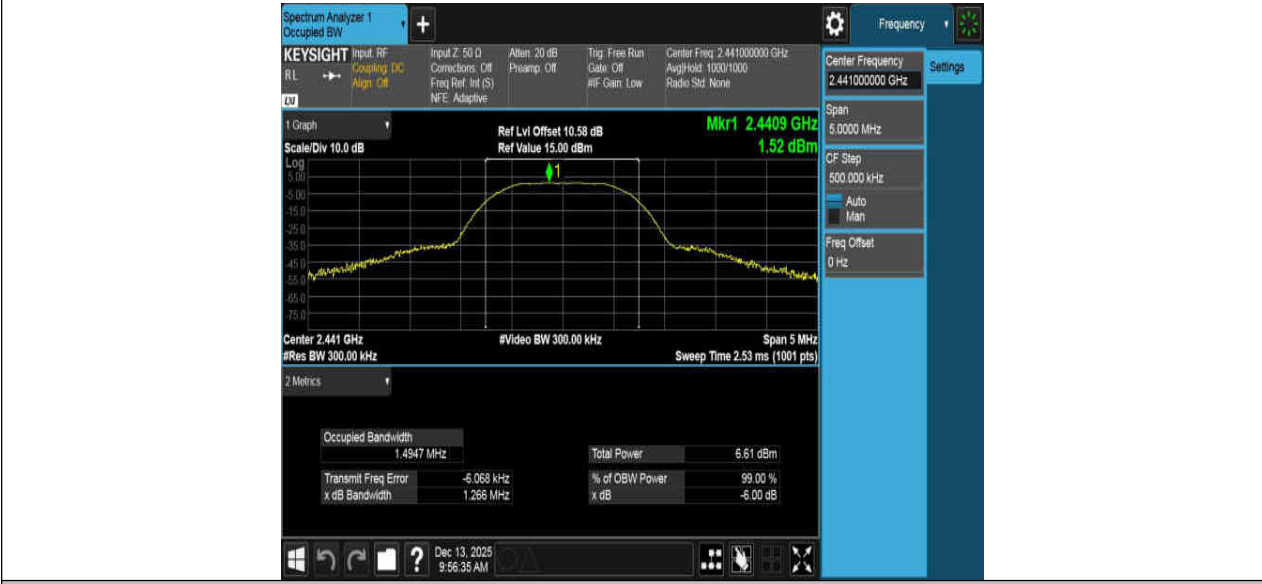


NTNV_2DH5_Ant1_2480




NTNV_3DH5_Ant1_2402

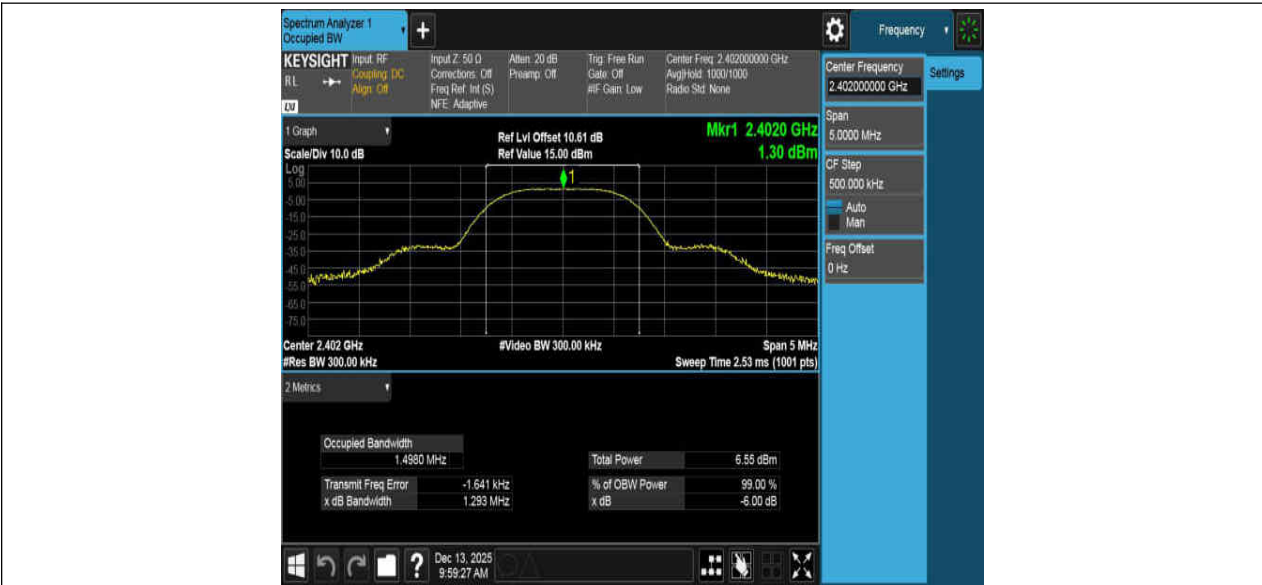

NTNV_3DH5_Ant1_2441

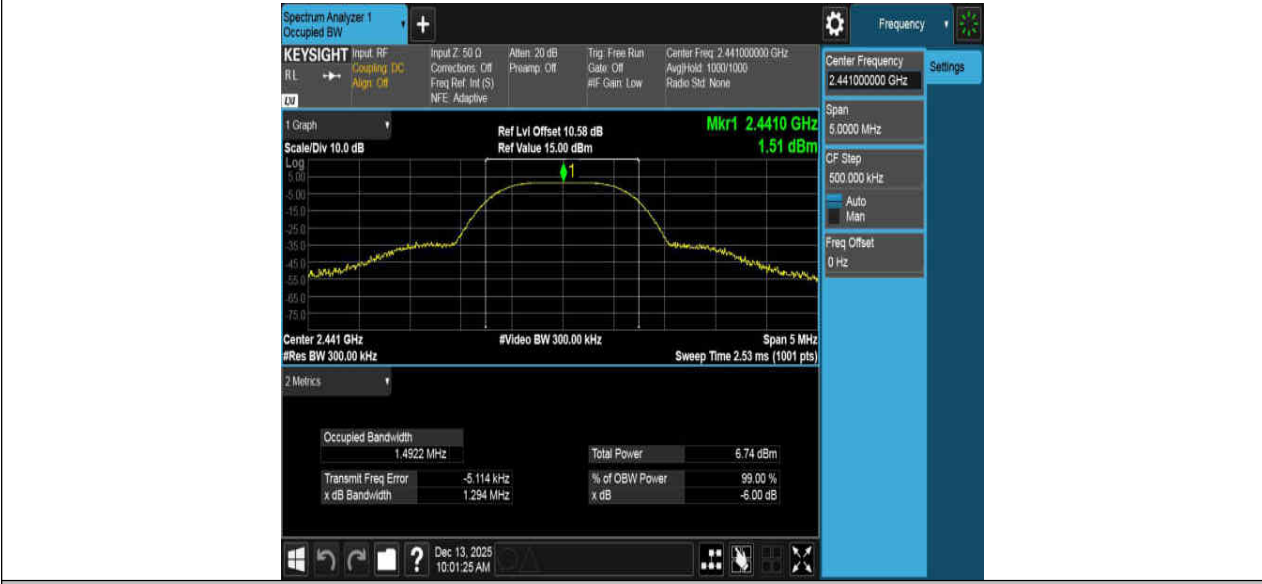

NTNV_3DH5_Ant1_2480

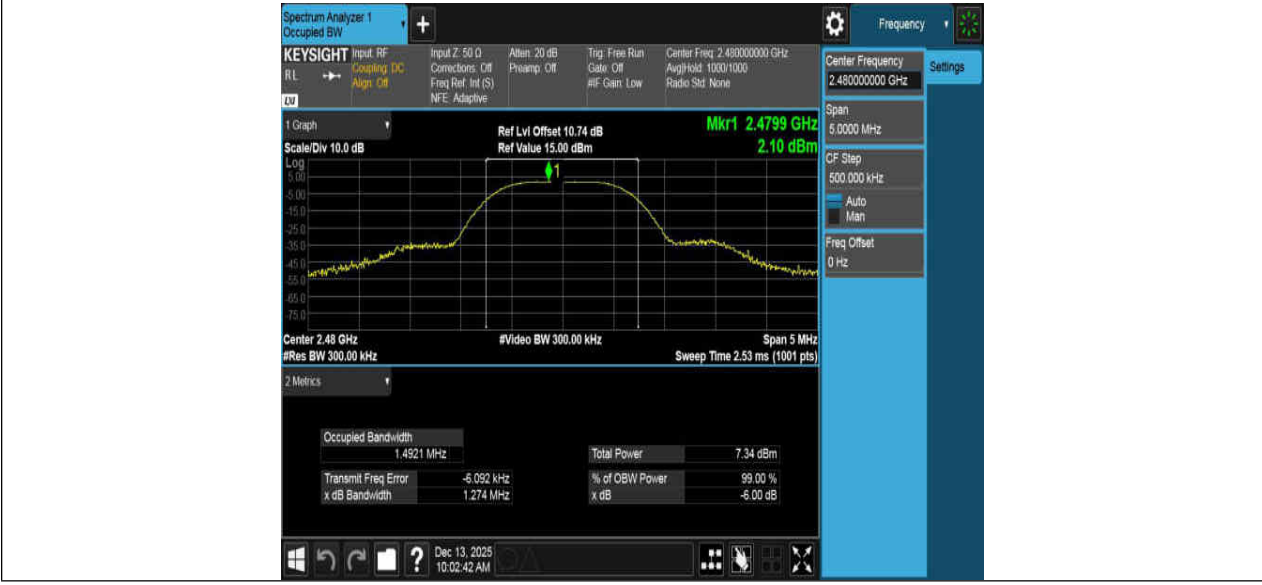


11. Dwell time

11.1. Limit

Frequency dwell time (time during which radio waves continue to be emitted at a specified frequency) of a transmitting equipment using the FHSS system shall be 0.4 seconds or less.

11.2. Block Diagram of Test Setup




11.3. Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (3) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula $\text{Dwell time} = \text{total hops} \times \text{pulse's on time}$.

11.4. Test Result


Test Condition	Test Mode	Ant.	Freq. (MHz)	Burst Width (ms)	Total Hops (Num)	Result(s)	Limit (s)	Verdict
NTNV	DH1	Ant1	Hop	0.35	320	0.112	≤0.4	PASS
	DH3	Ant1	Hop	1.61	160	0.258	≤0.4	PASS
	DH5	Ant1	Hop	2.85	90	0.257	≤0.4	PASS
	2DH1	Ant1	Hop	0.36	290	0.104	≤0.4	PASS
	2DH3	Ant1	Hop	1.61	120	0.193	≤0.4	PASS
	2DH5	Ant1	Hop	2.30	80	0.184	≤0.4	PASS
	3DH1	Ant1	Hop	0.36	290	0.104	≤0.4	PASS
	3DH3	Ant1	Hop	1.61	160	0.258	≤0.4	PASS
	3DH5	Ant1	Hop	2.86	130	0.372	≤0.4	PASS

11.5. Original Test Data

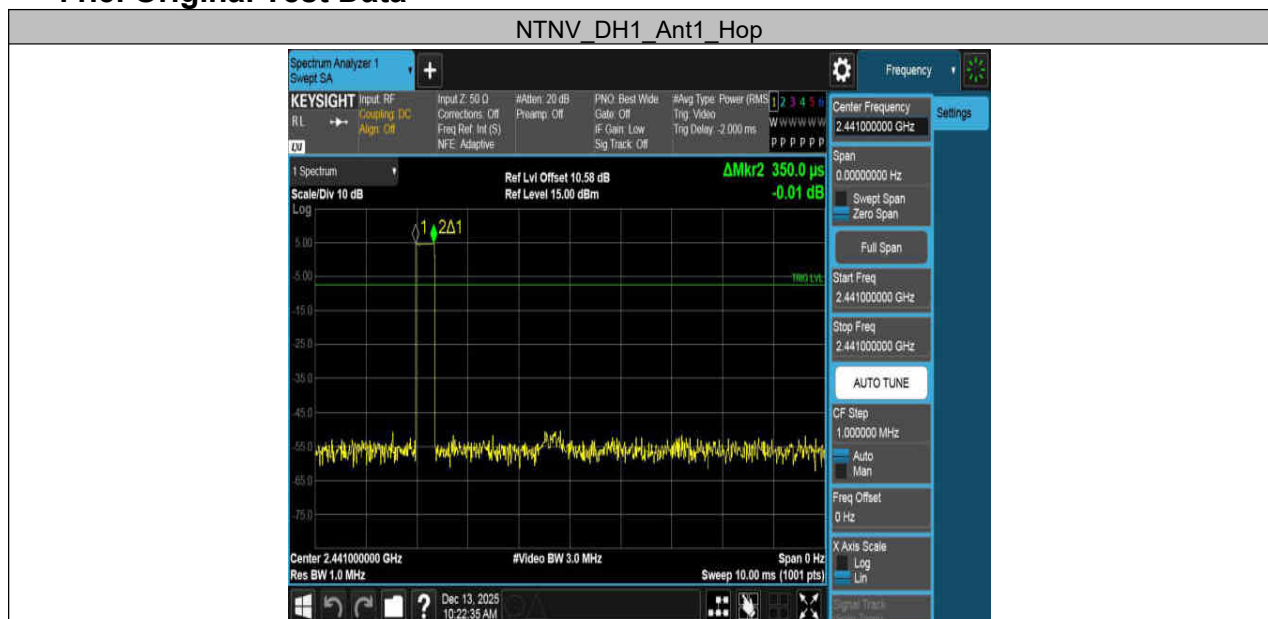




NTNV_DH3_Ant1_Hop

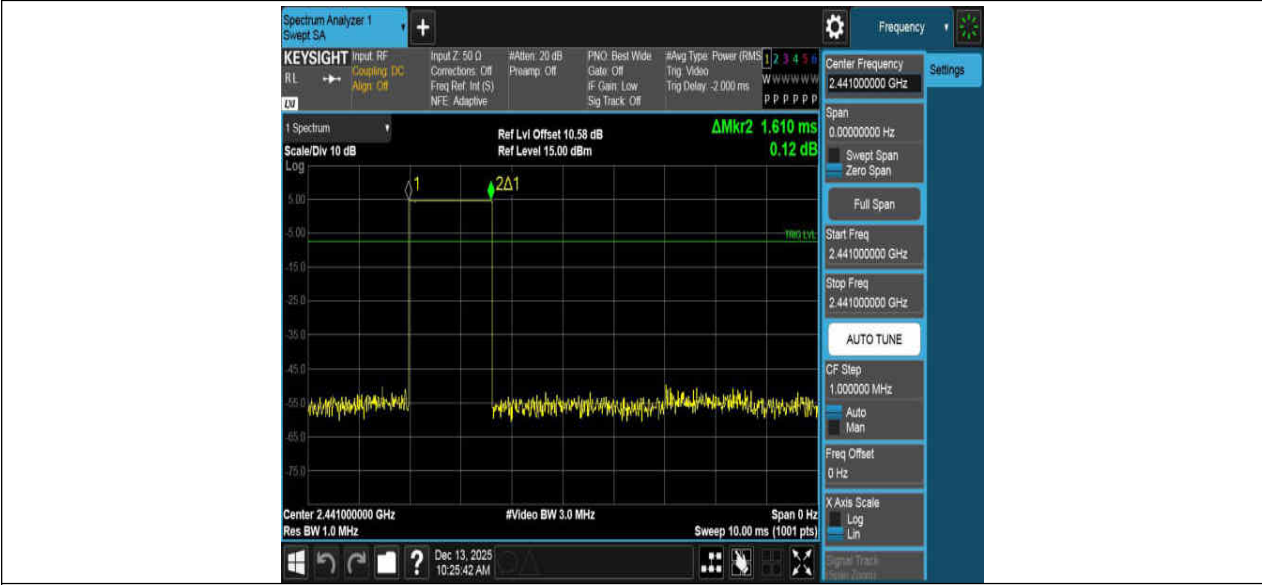

NTNV_DH5_Ant1_Hop




NTNV_2DH1_Ant1_Hop

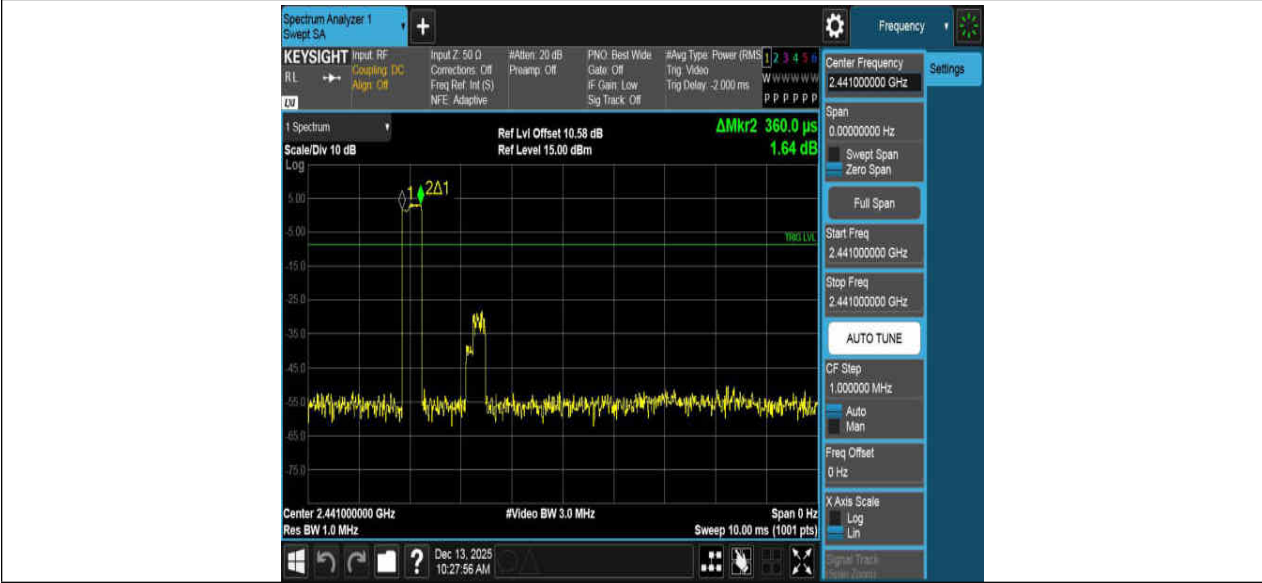




NTNV_2DH3_Ant1_Hop

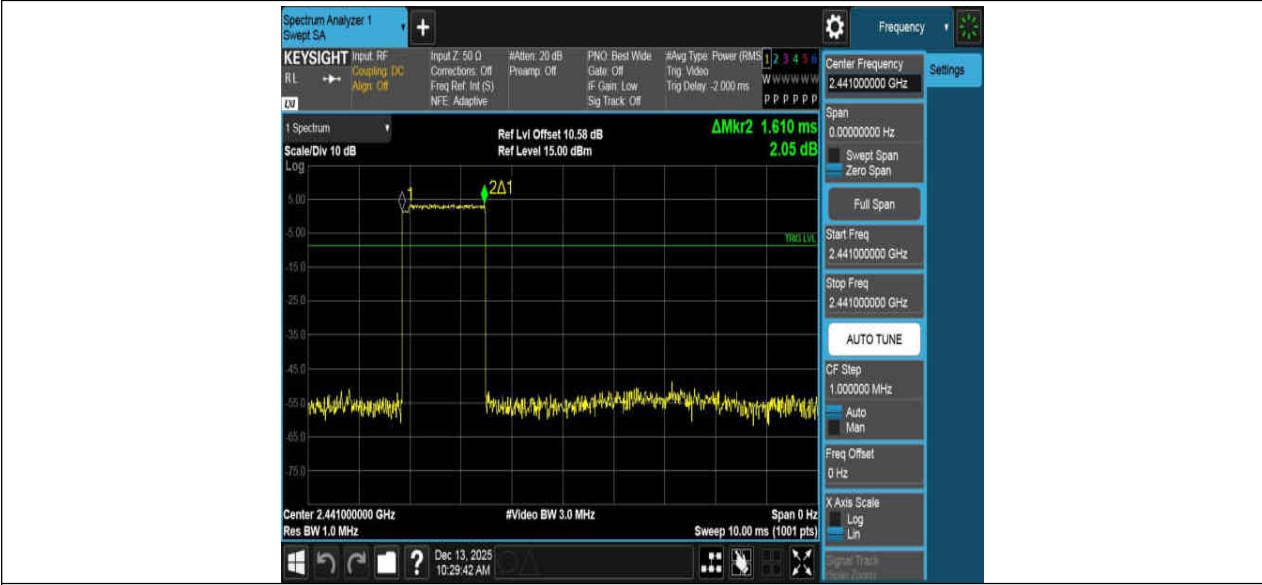


NTNV_2DH5_Ant1_Hop



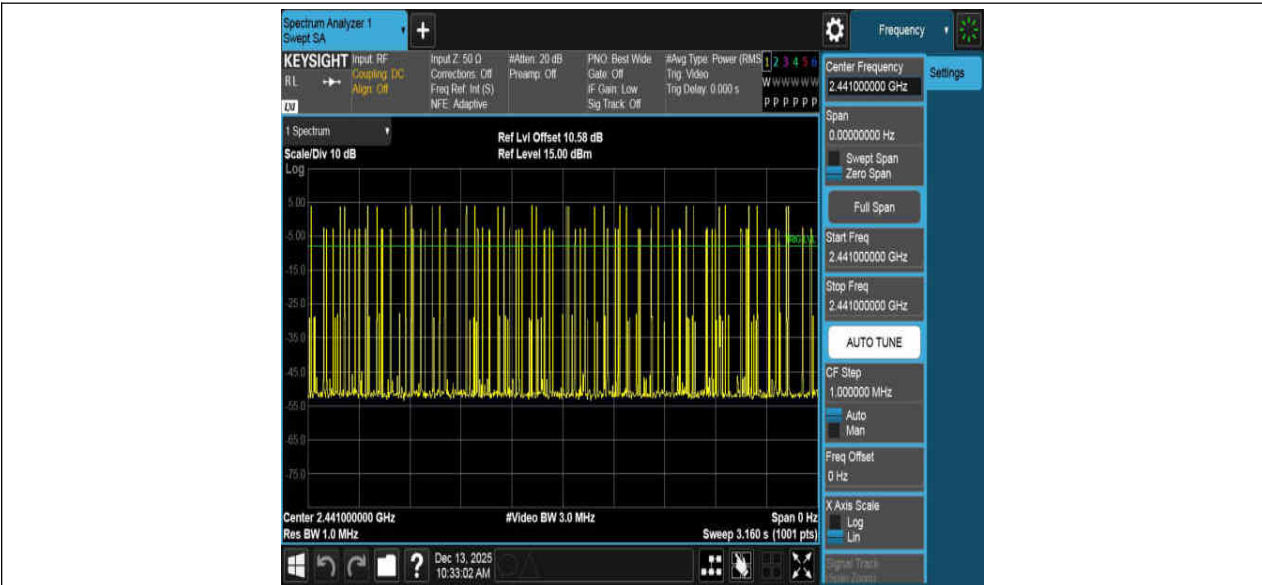

NTNV_3DH3_Ant1_Hop

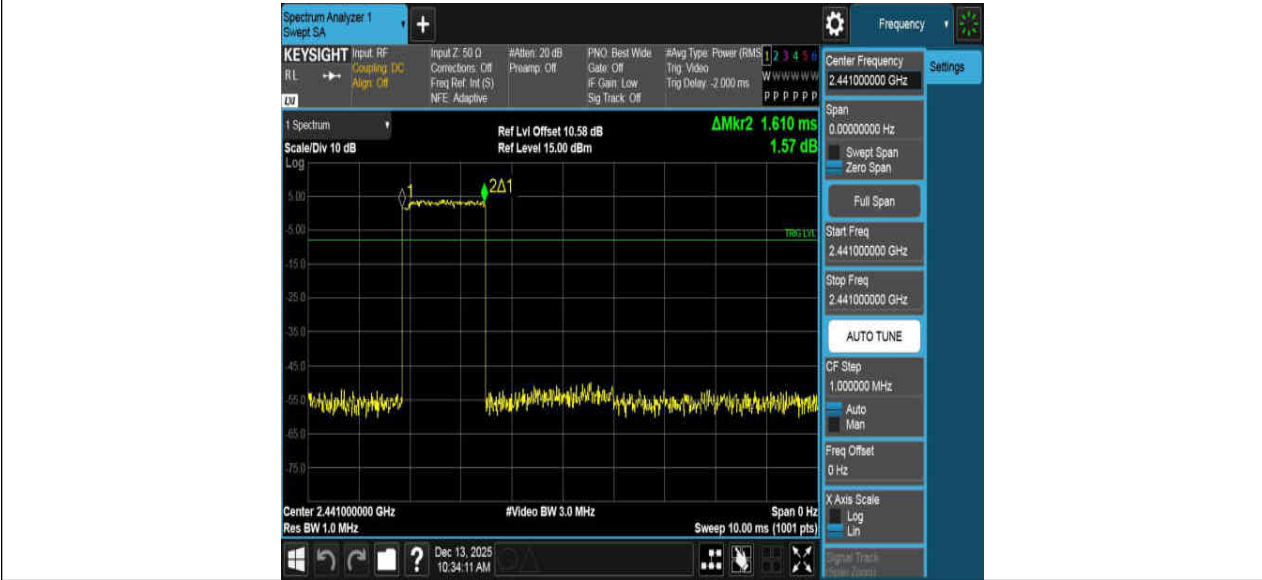

NTNV_3DH5_Ant1_Hop




12. Transmitter Spurious Emissions (conducted)

12.1. Limit

Permissible mean power of spurious emission of each frequency supplied to a feeder, that is, mean power of spurious emission in the 1 MHz bandwidth at frequency f other than frequency band used shall be as follows:

- $2,387\text{MHz} \leq f \leq 2,400\text{MHz}$ and $2,483.5\text{MHz} < f \leq 2,496.5\text{MHz}$ 25 μW or less
- $2,387\text{MHz} > f$ and $2,496.5\text{MHz} < f$ 2.5 μW or less

12.2. Block Diagram of Test Setup



12.3. Test Procedure

(1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Resolution BW: 1 MHz.

Video BW: 1 MHz.

Detector: Peak.

Trace Mode: Max Hold.

(2) All the emissions from 30 MHz to 13 GHz were measured and record.

12.4. Test Result

Note: If spurious emissions are greater than (limit -3dB) in 1MHz RBW, then more detailed measurements are required. Repeat the test in 30kHz RBW, the spurious emission value using following the formula below:

Calculated Value = (Measured Value + 15.2 dB)

15.2 dB adjustment is derived from the Conversion Factor of RBW

Conversion Factor of RBW = $10 \times \log (\text{Reference Bandwidth} / \text{RBW of measurement}) = 15.2(\text{dB})$

Where: Reference Bandwidth = 1 MHz


RBW of measurement = 30 kHz


Test Condition	Test Mode	Ant.	Freq. (MHz)	Freq. Range (MHz)	Result (dBm)	Limit (dBm)	Result (μW)	Limit (μW)	Verdict
NTNV	DH5	Ant1	2402	30~1000	-61.48	≤ -36	0.0007 1	≤ 0.3	PASS
				1000~2387	-44.57	≤ -26	0.0349 1	≤ 2.5	PASS
				2387~2400	-42.43	≤ -16	0.0571 5	≤ 25	PASS
				2483.5~2496.5	-63.58	≤ -16	0.0004 4	≤ 25	PASS
				2496.5~13000	-46.12	≤ -26	0.0244 3	≤ 2.5	PASS
			2441	30~1000	-62.12	≤ -36	0.0006 1	≤ 0.3	PASS
				1000~2387	-44.28	≤ -26	0.0373 3	≤ 2.5	PASS
				2387~2400	-63.58	≤ -16	0.0004 4	≤ 25	PASS
				2483.5~2496.5	-62.57	≤ -16	0.0005 5	≤ 25	PASS
				2496.5~	-45.79	≤ -26	0.0263	≤ 2.5	PASS

				13000			6		
			2480	30~1000	-61.49	≤-36	0.0007 1	≤0.3	PASS
				1000~23 87	-43.88	≤-26	0.0409 3	≤2.5	PASS
				2387~24 00	-63.68	≤-16	0.0004 3	≤25	PASS
				2483.5~ 2496.5	-56.84	≤-16	0.0020 7	≤25	PASS
				2496.5~ 13000	-46.02	≤-26	0.0250 0	≤2.5	PASS
	2DH5	Ant1	2402	30~1000	-64.49	≤-36	0.0003 6	≤0.3	PASS
				1000~23 87	-48.67	≤-26	0.0135 8	≤2.5	PASS
				2387~24 00	-36.09	≤-16	0.2460 4	≤25	PASS
				2483.5~ 2496.5	-62.23	≤-16	0.0006 0	≤25	PASS
				2496.5~ 13000	-49.36	≤-26	0.0115 9	≤2.5	PASS
			2441	30~1000	-65.78	≤-36	0.0002 6	≤0.3	PASS
				1000~23 87	-48.61	≤-26	0.0137 7	≤2.5	PASS
				2387~24 00	-63.17	≤-16	0.0004 8	≤25	PASS
				2483.5~ 2496.5	-62.97	≤-16	0.0005 0	≤25	PASS
				2496.5~ 13000	-49.27	≤-26	0.0118 3	≤2.5	PASS
			2480	30~1000	-64.85	≤-36	0.0003 3	≤0.3	PASS
				1000~23 87	-48.10	≤-26	0.0154 9	≤2.5	PASS
				2387~24 00	-63.89	≤-16	0.0004 1	≤25	PASS
				2483.5~ 2496.5	-58.06	≤-16	0.0015 6	≤25	PASS
				2496.5~ 13000	-49.46	≤-26	0.0113 2	≤2.5	PASS
	3DH5	Ant1	2402	30~1000	-65.49	≤-36	0.0002 8	≤0.3	PASS
				1000~23 87	-48.81	≤-26	0.0131 5	≤2.5	PASS
				2387~24 00	-35.48	≤-16	0.2831 4	≤25	PASS
				2483.5~ 2496.5	-64.34	≤-16	0.0003 7	≤25	PASS
				2496.5~ 13000	-49.79	≤-26	0.0105 0	≤2.5	PASS
			2441	30~1000	-65.06	≤-36	0.0003 1	≤0.3	PASS
				1000~23 87	-48.37	≤-26	0.0145 5	≤2.5	PASS
				2387~24 00	-63.39	≤-16	0.0004 6	≤25	PASS

				2483.5~2496.5	-63.63	≤-16	0.0004 ₃	≤25	PASS
				2496.5~13000	-49.25	≤-26	0.0118 ₉	≤2.5	PASS
			2480	30~1000	-64.25	≤-36	0.0003 ₈	≤0.3	PASS
				1000~2387	-48.18	≤-26	0.0152 ₁	≤2.5	PASS
				2387~2400	-64.31	≤-16	0.0003 ₇	≤25	PASS
				2483.5~2496.5	-58.98	≤-16	0.0012 ₆	≤25	PASS
				2496.5~13000	-49.50	≤-26	0.0112 ₂	≤2.5	PASS

12.5. Original Test Data

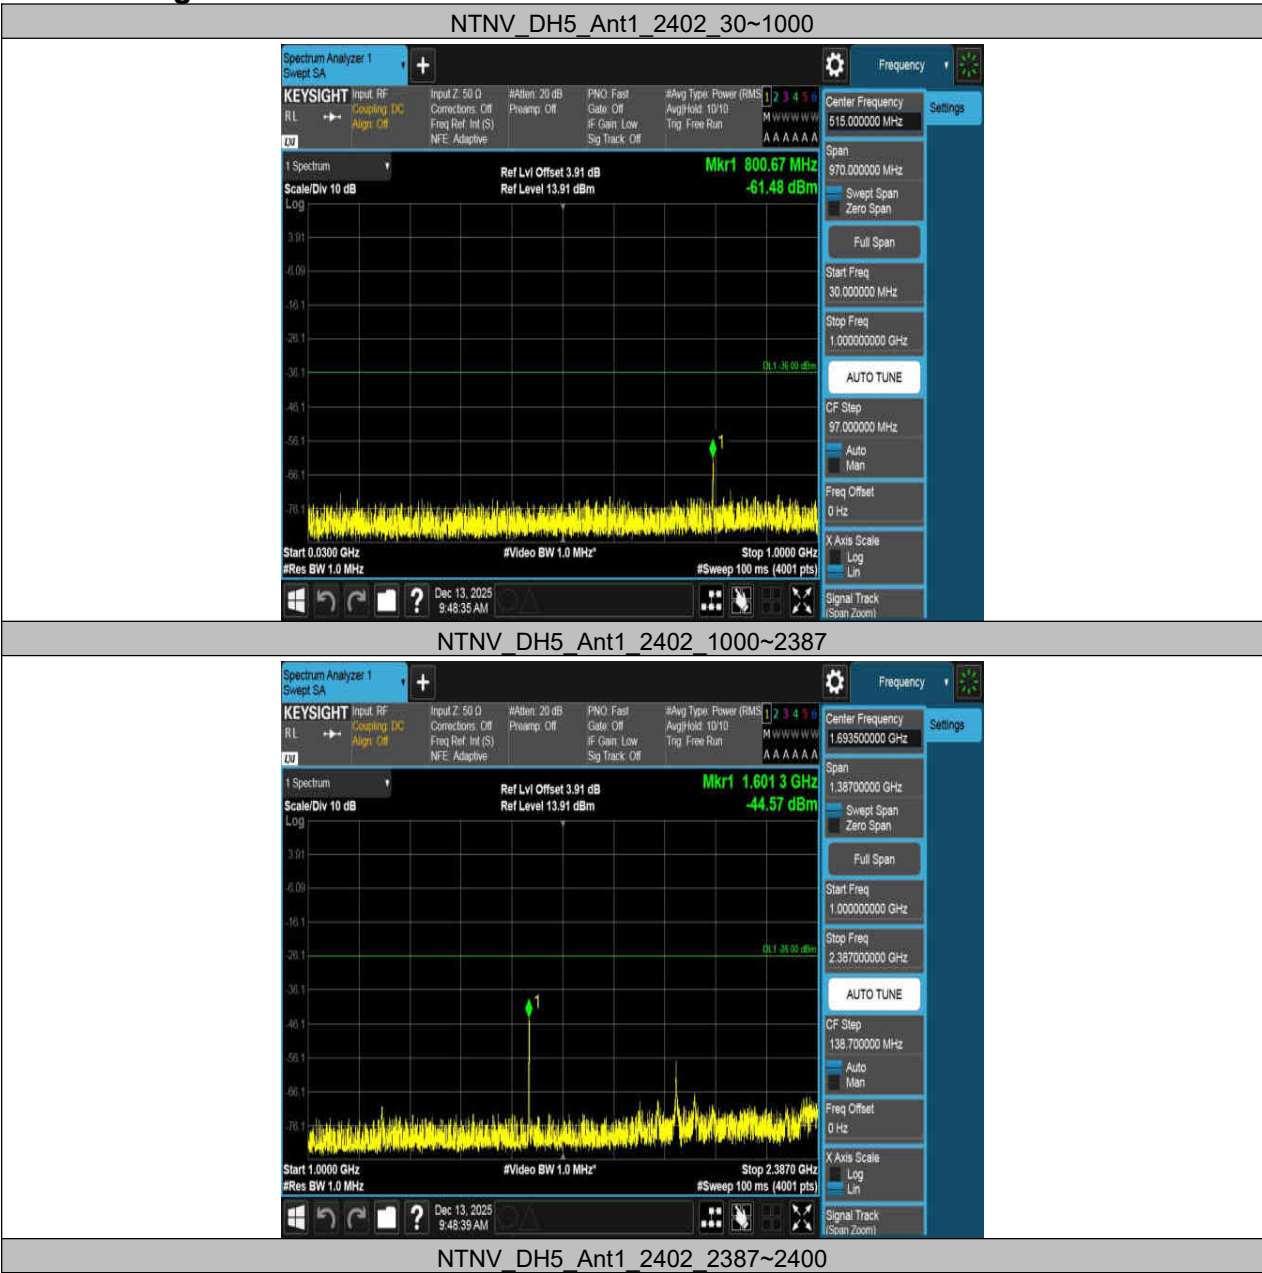


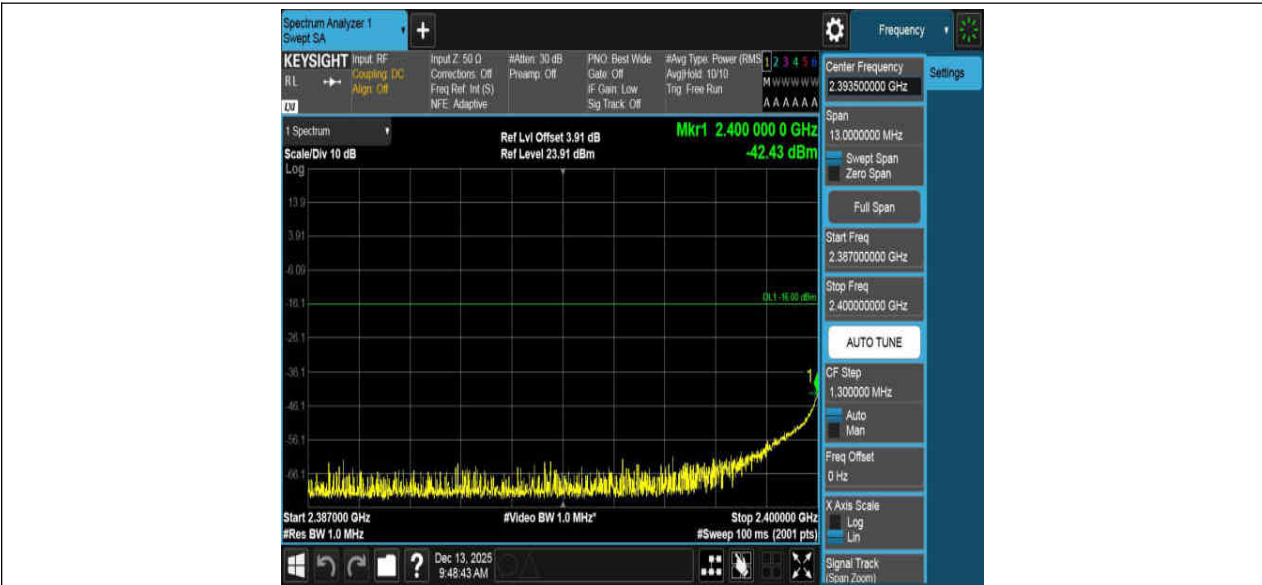


NTNV_DH5_Ant1_2402_2483.5~2496.5



NTNV_DH5_Ant1_2402_2496.5~13000

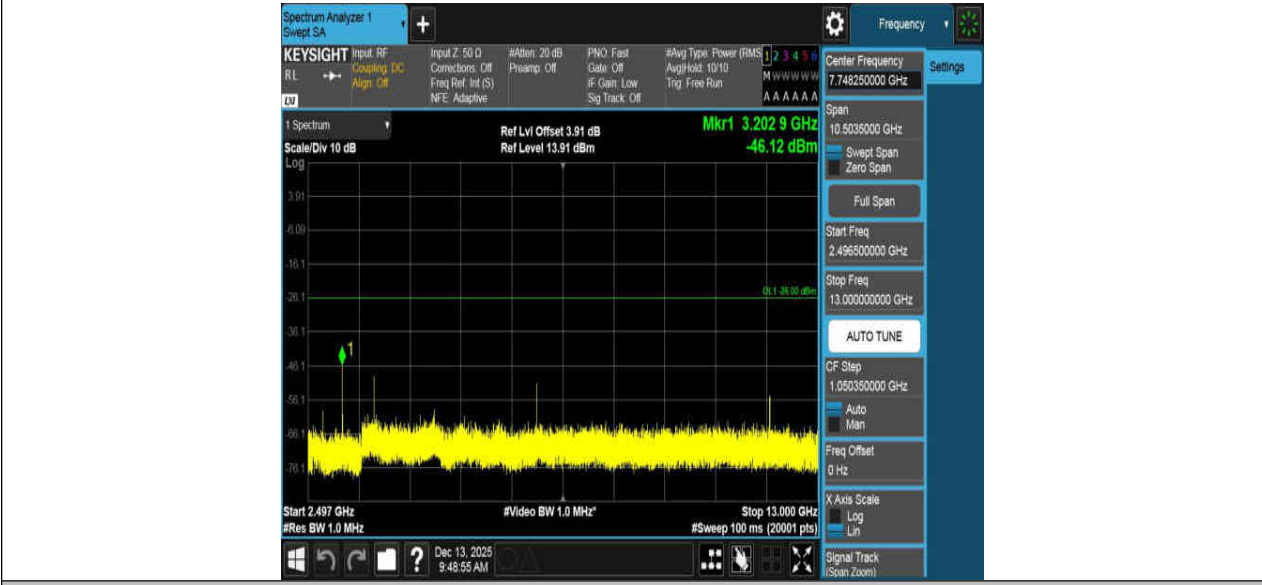


NTNV_DH5_Ant1_2441_30~1000

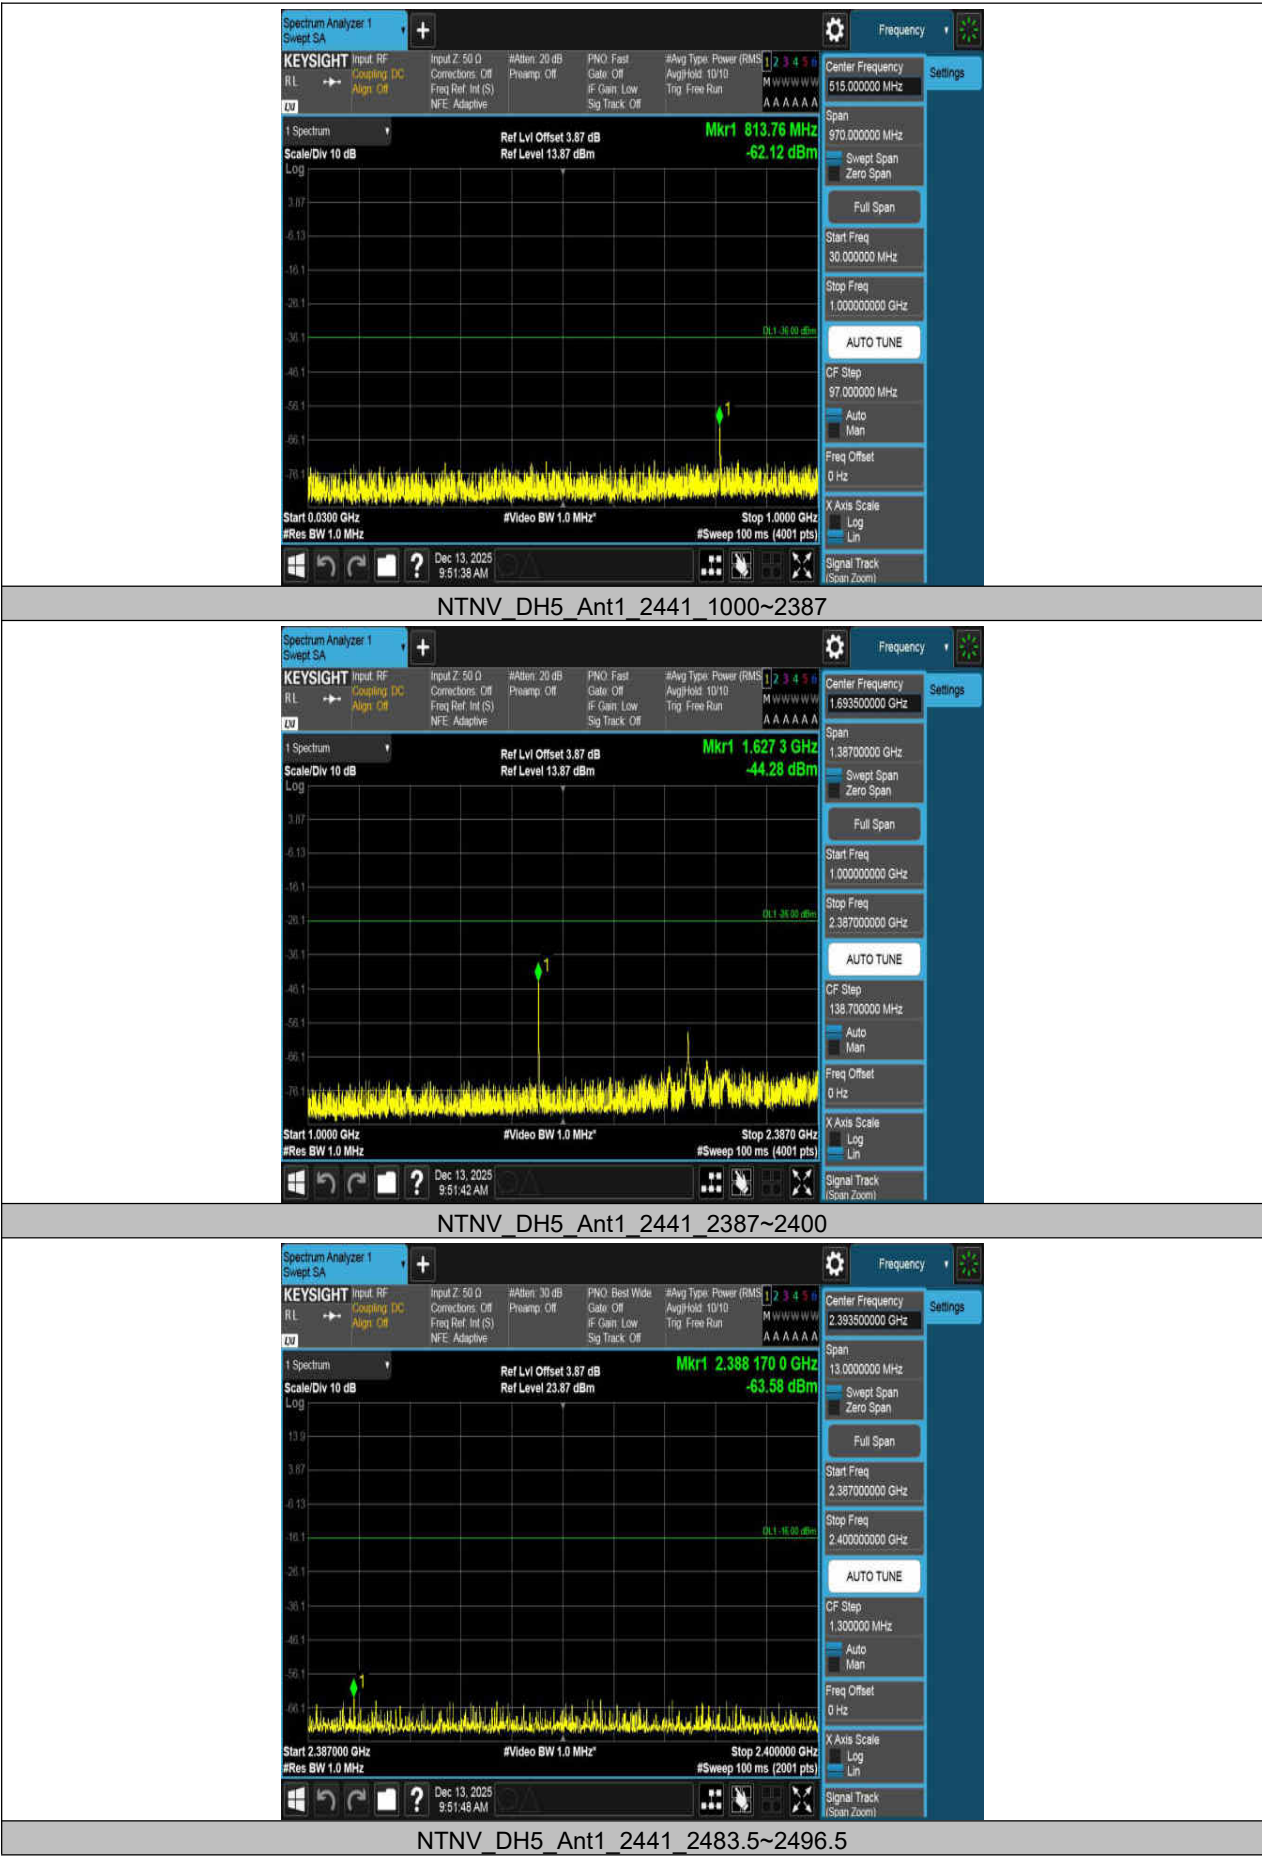




NTNV_DH5_Ant1_2441_2496.5~13000

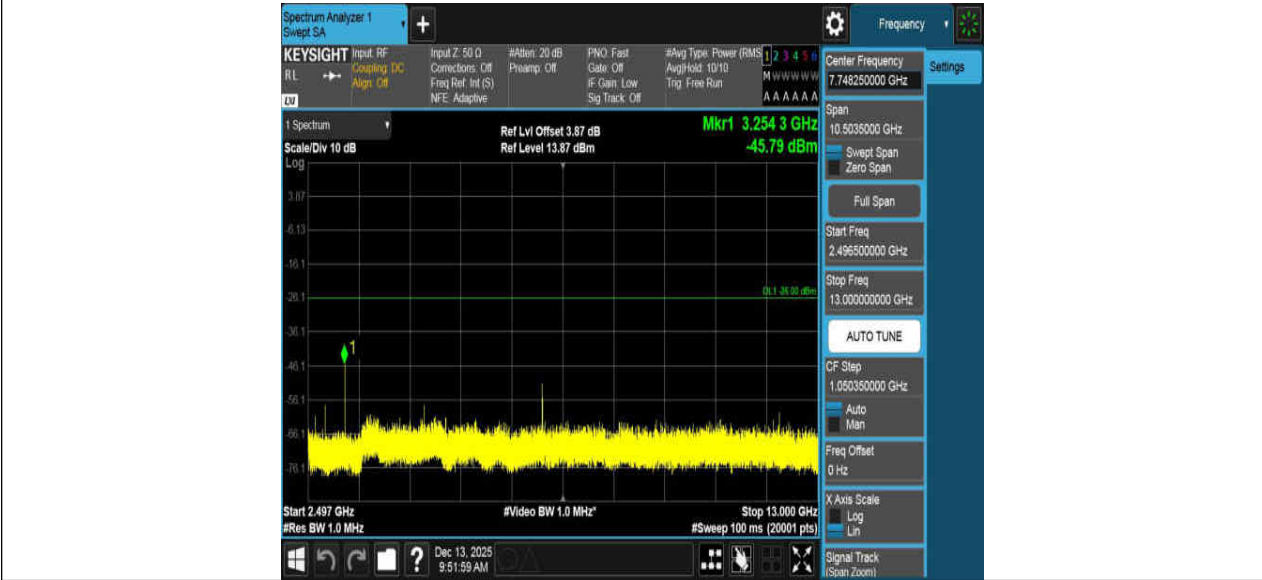


NTNV_DH5_Ant1_2480_30~1000




NTNV_DH5_Ant1_2480_1000~2387

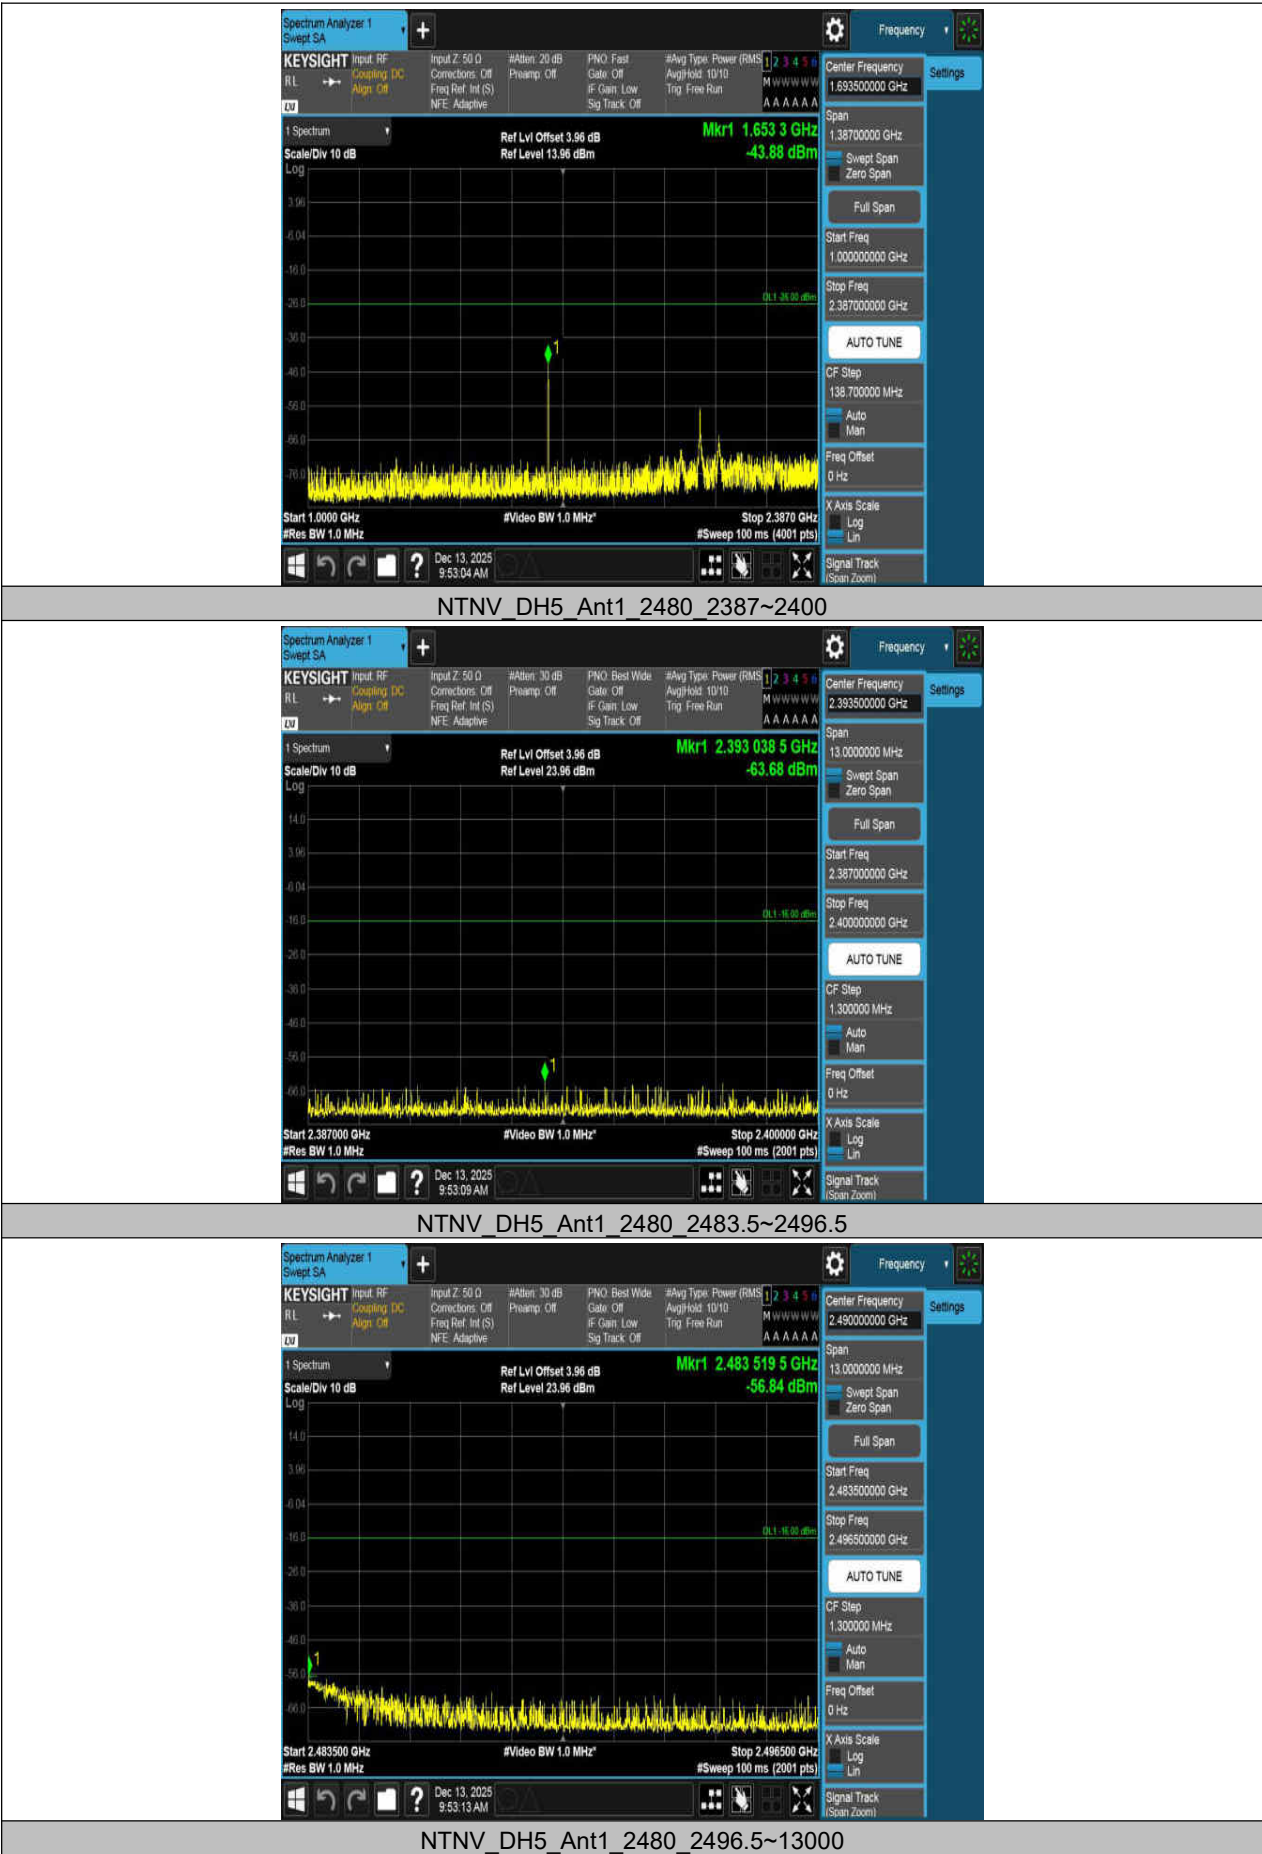


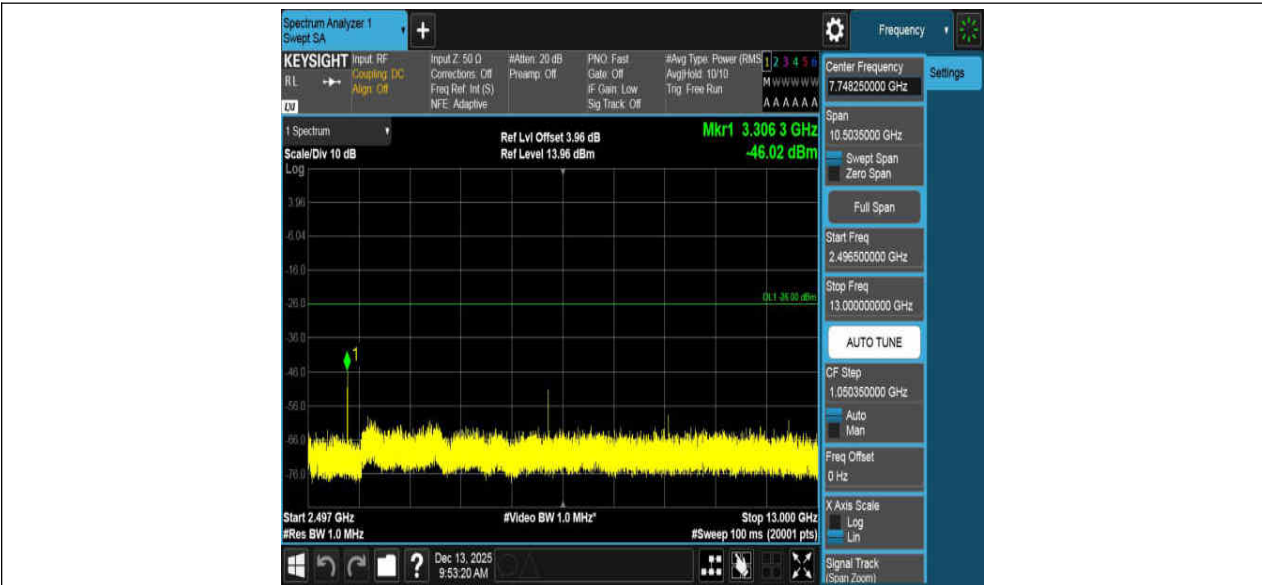


NTNV_2DH5_Ant1_2402_30~1000

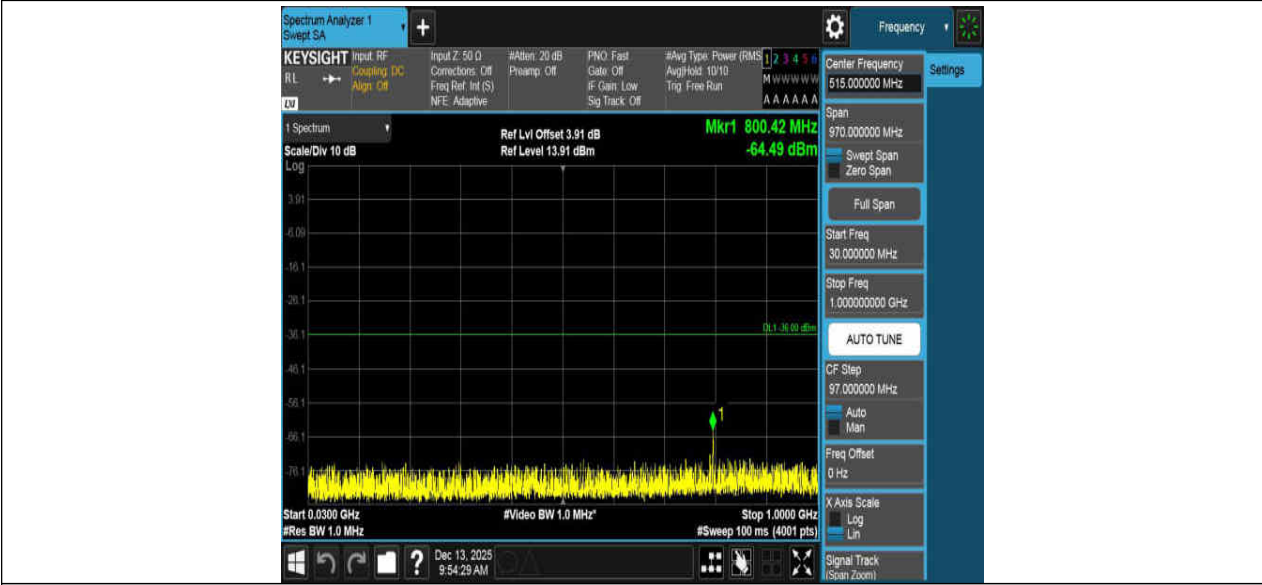

NTNV_2DH5_Ant1_2402_1000~2387

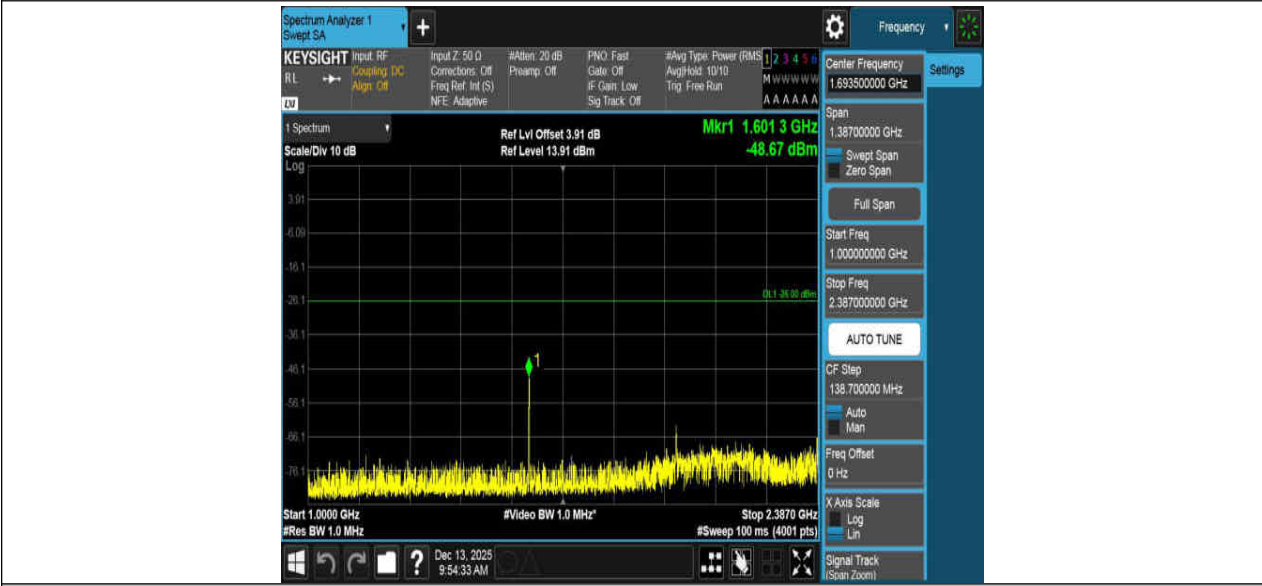


NTNV_2DH5_Ant1_2402_2387~2400

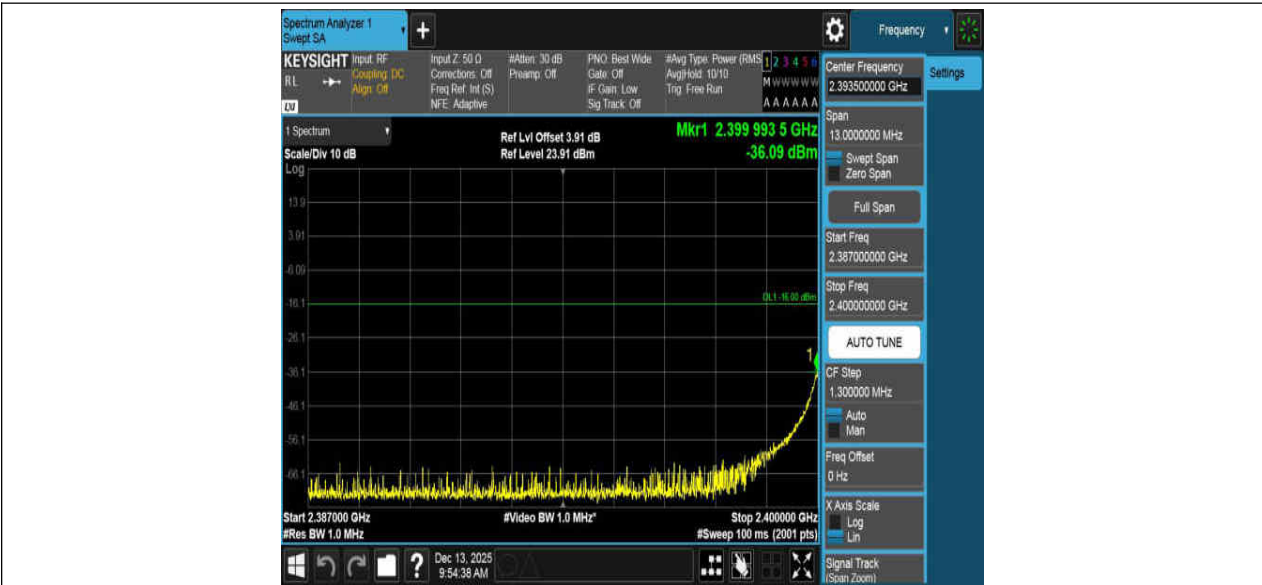


NTNV 2DH5_Ant1_2402_2483.5~2496.5




NTNV 2DH5_Ant1_2402_2496.5~13000

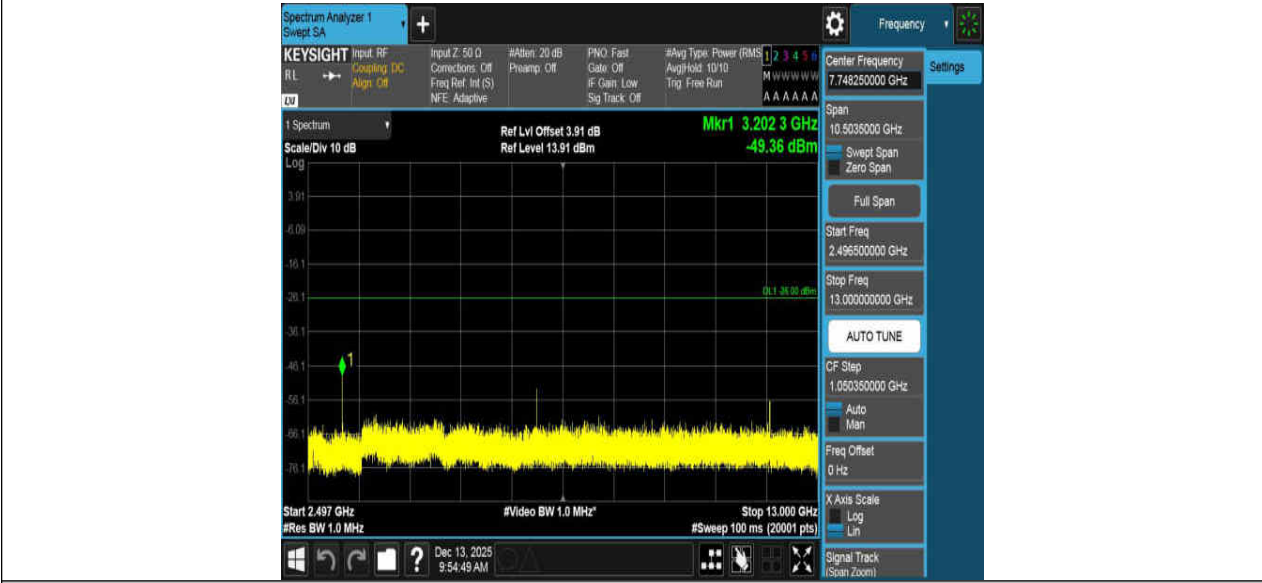

NTNV 2DH5_Ant1_2441_30~1000

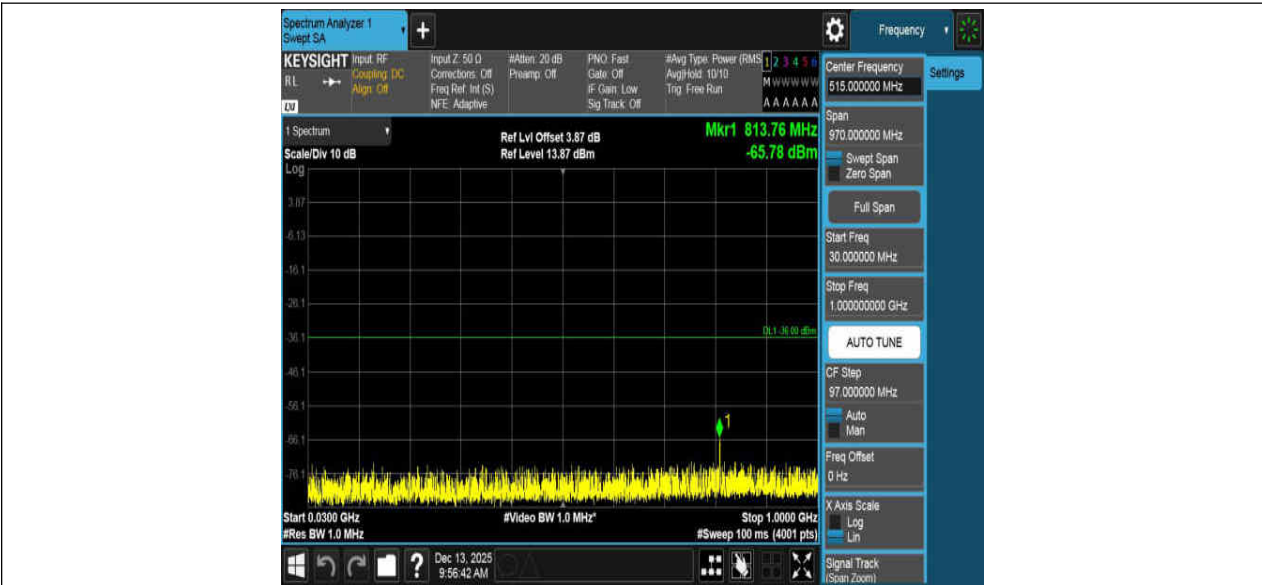

NTNV_2DH5_Ant1_2441_1000~2387

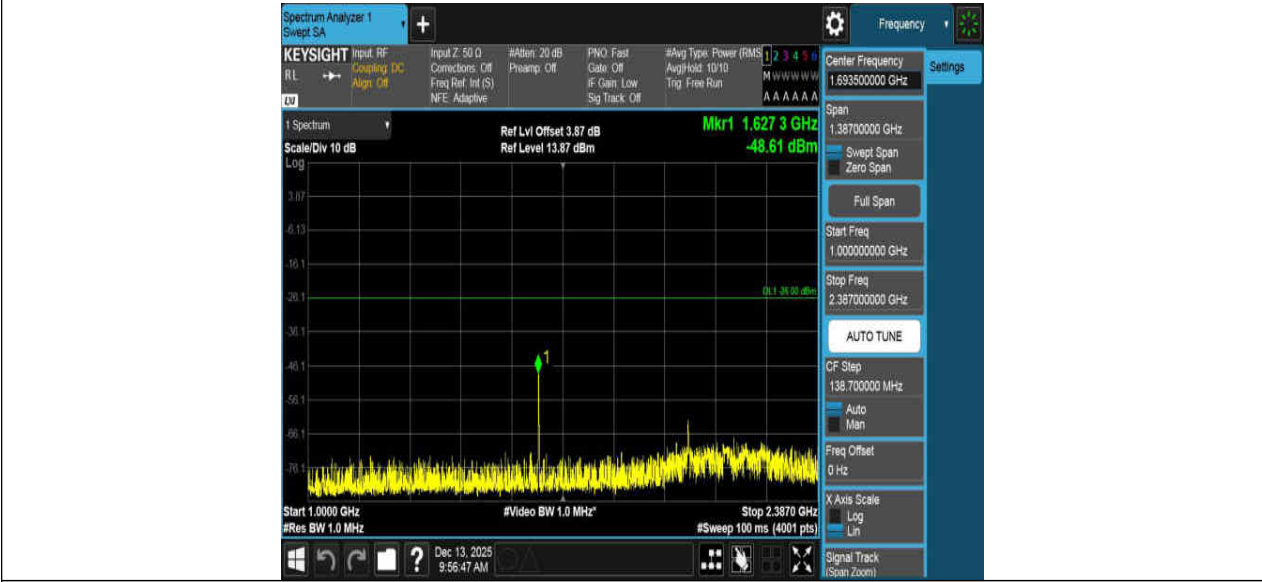


NTNV_2DH5_Ant1_2441_2387~2400




NTNV_2DH5_Ant1_2441_2483.5~2496.5




NTNV_2DH5_Ant1_2441_2496.5~13000

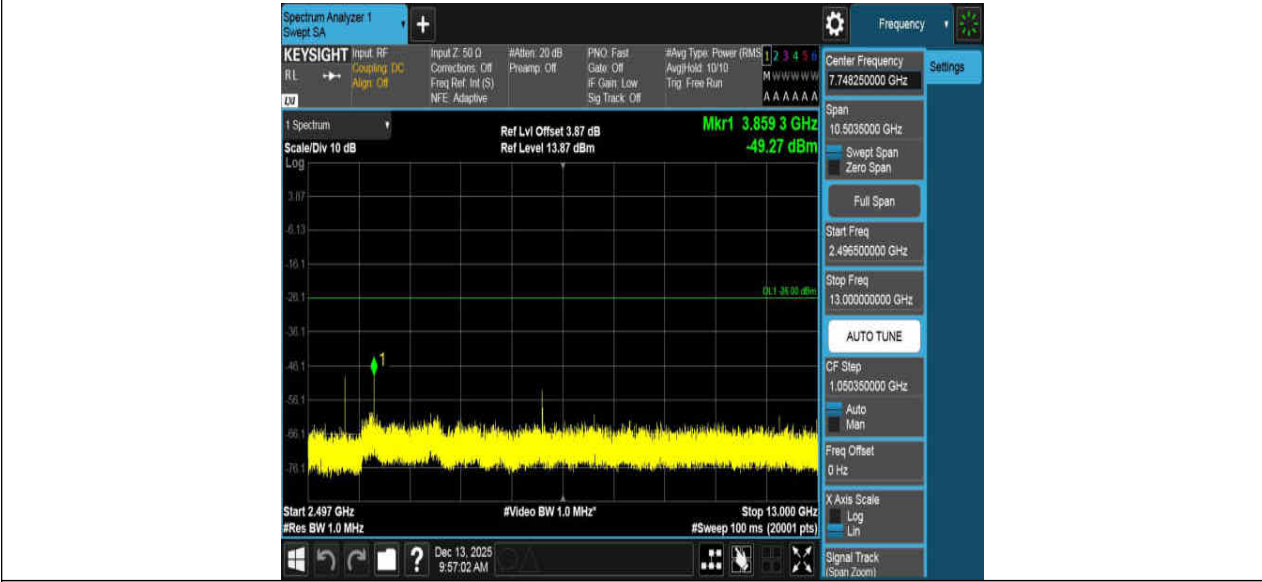

NTNV_2DH5_Ant1_2480_30~1000

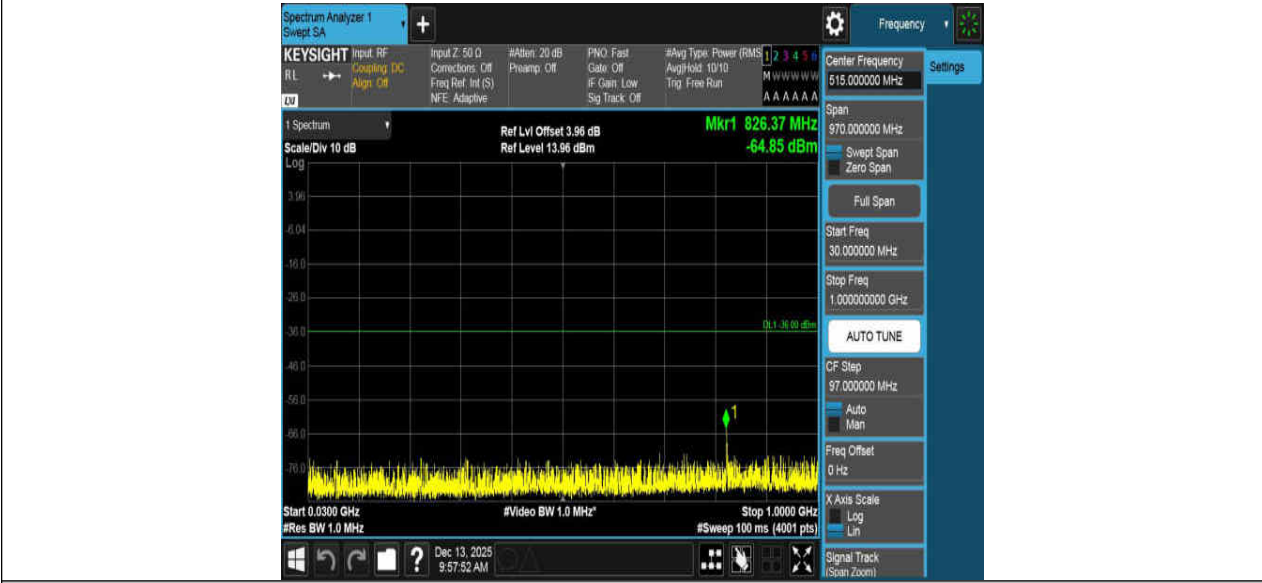

NTNV_2DH5_Ant1_2480_1000~2387

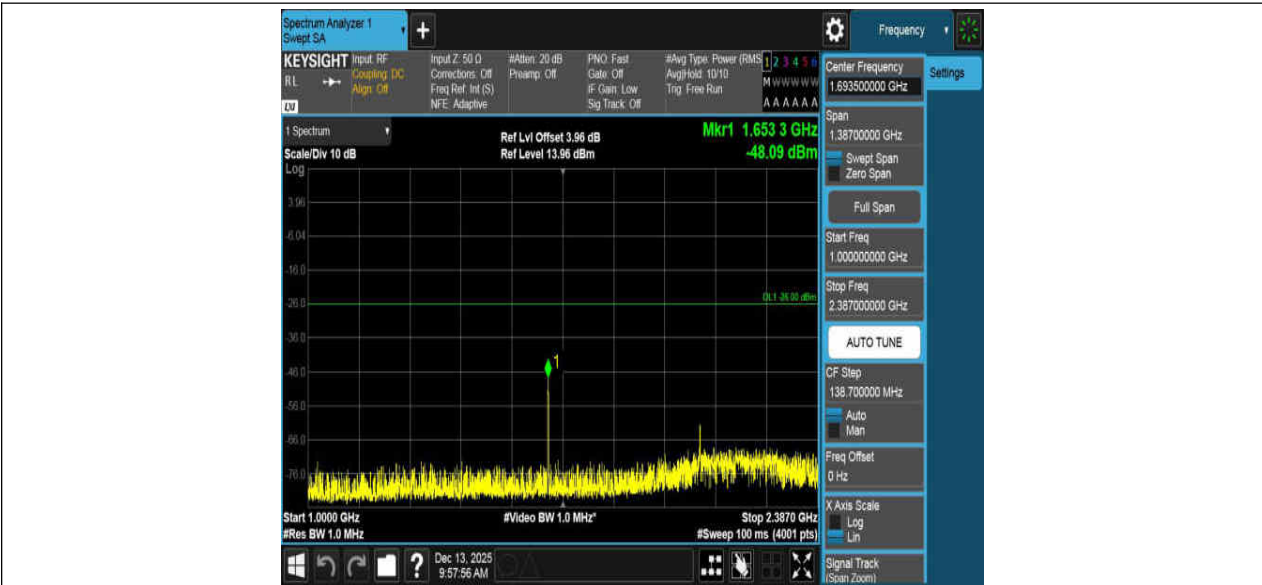


NTNV_2DH5_Ant1_2480_2387~2400



NTNV_2DH5_Ant1_2480_2483.5~2496.5




NTNV_2DH5_Ant1_2480_2496.5~13000

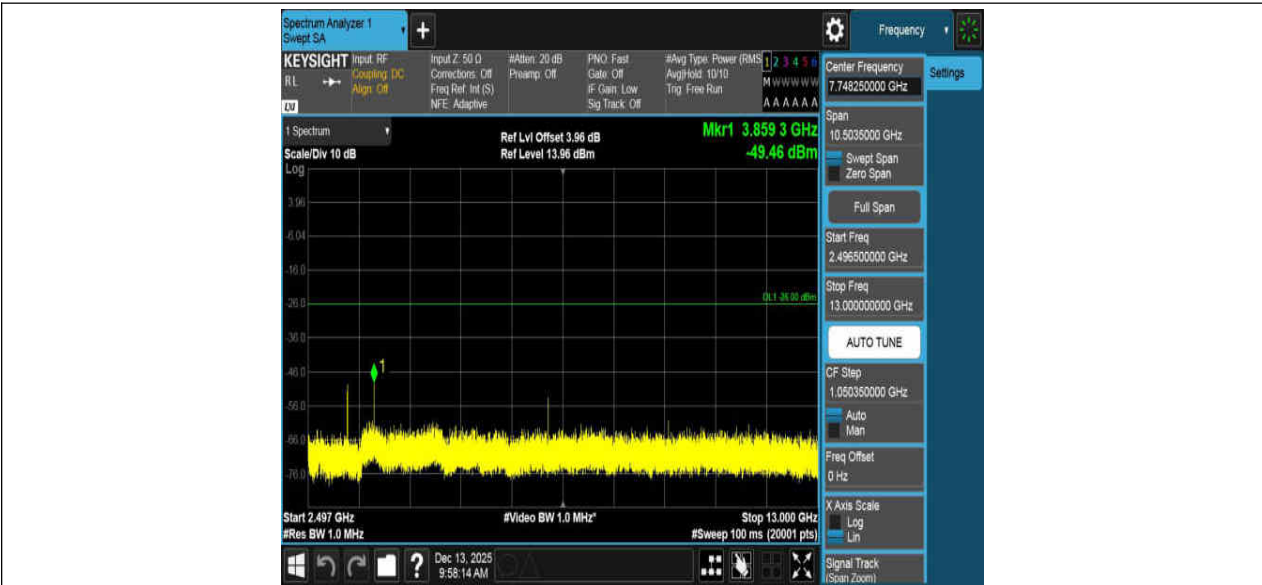


NTNV_3DH5_Ant1_2402_30~1000



NTNV_3DH5_Ant1_2402_1000~2387

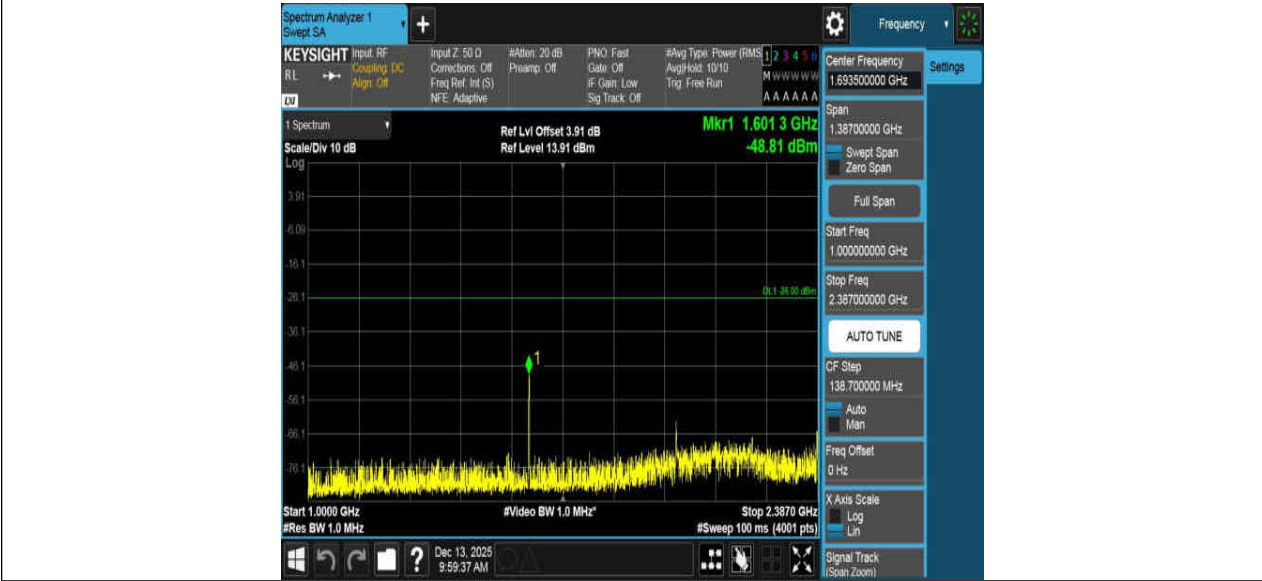


NTNV_3DH5_Ant1_2402_2387~2400

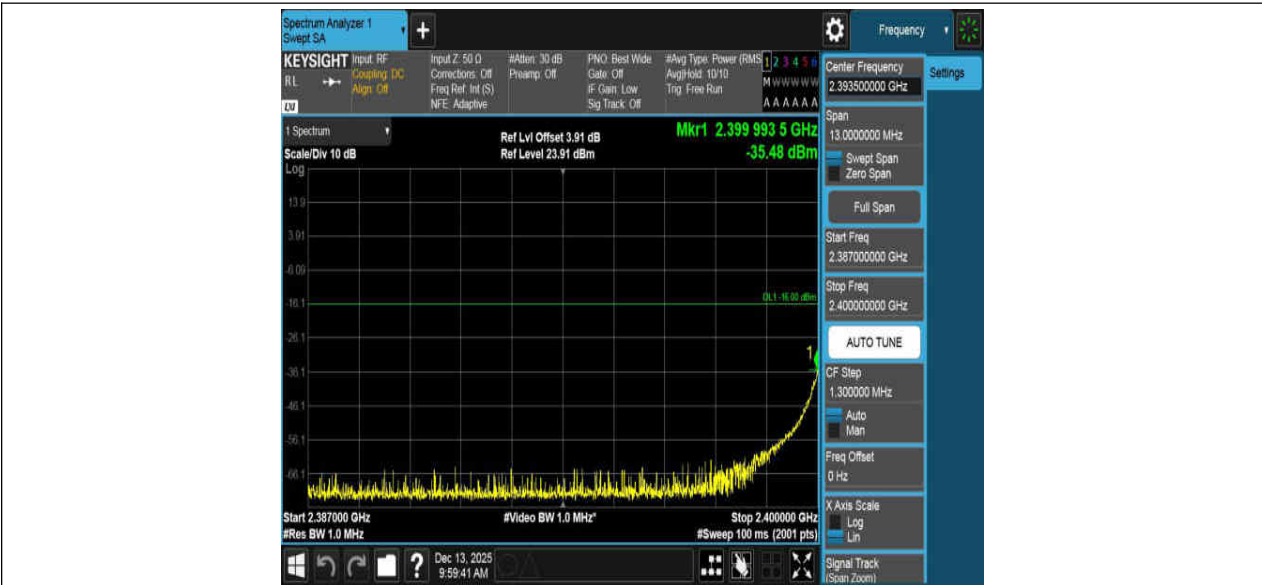


NTNV_3DH5_Ant1_2402_2483.5~2496.5



NTNV_3DH5_Ant1_2402_2496.5~13000

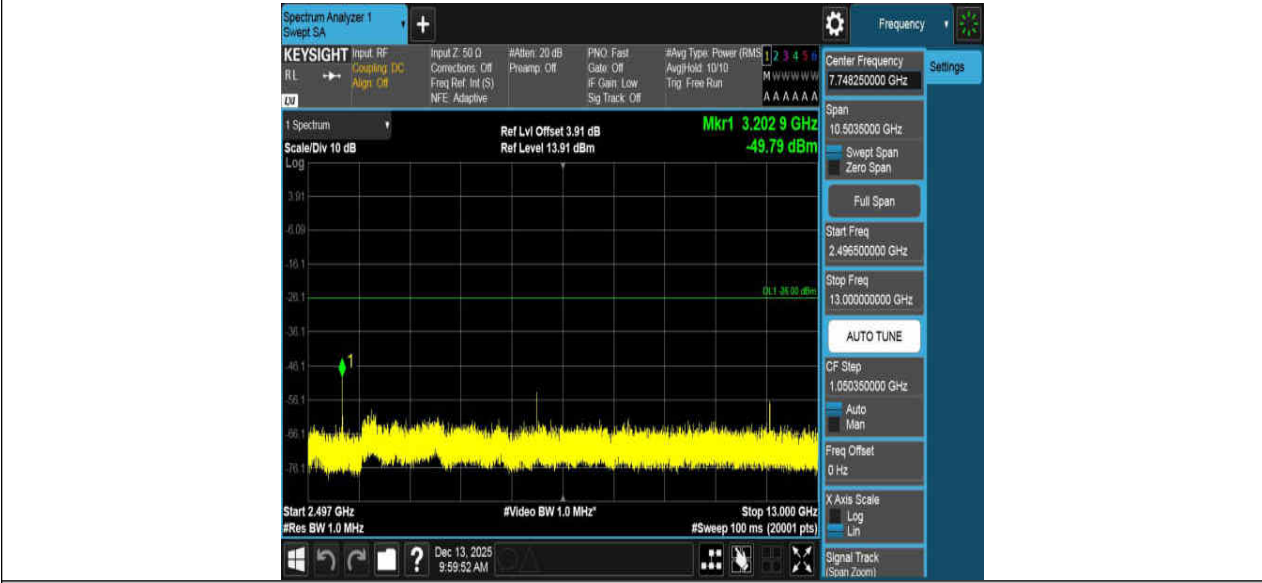

NTNV_3DH5_Ant1_2441_30~1000

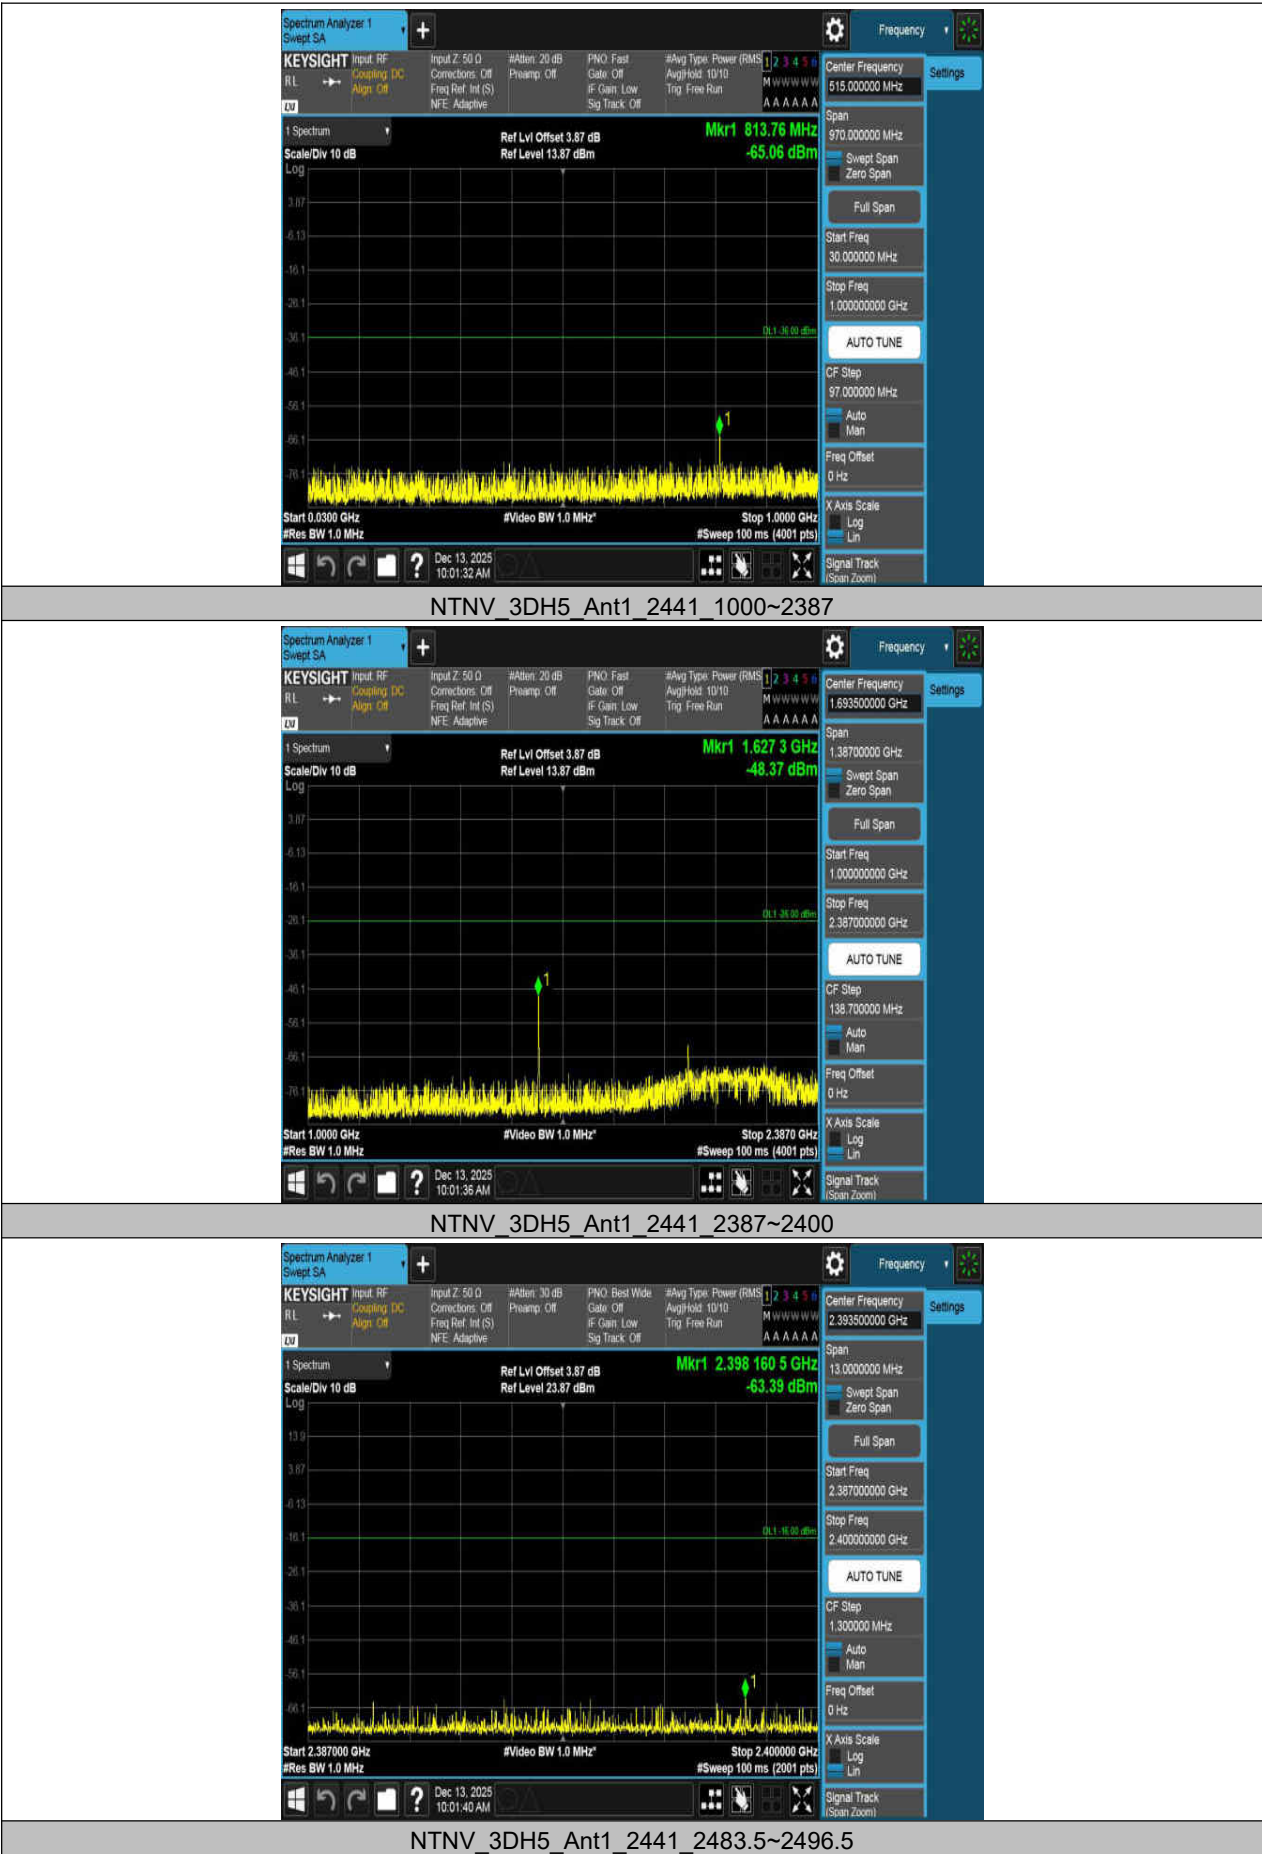




NTNV_3DH5_Ant1_2441_2496.5~13000



NTNV_3DH5_Ant1_2480_30~1000




NTNV_3DH5_Ant1_2480_1000~2387

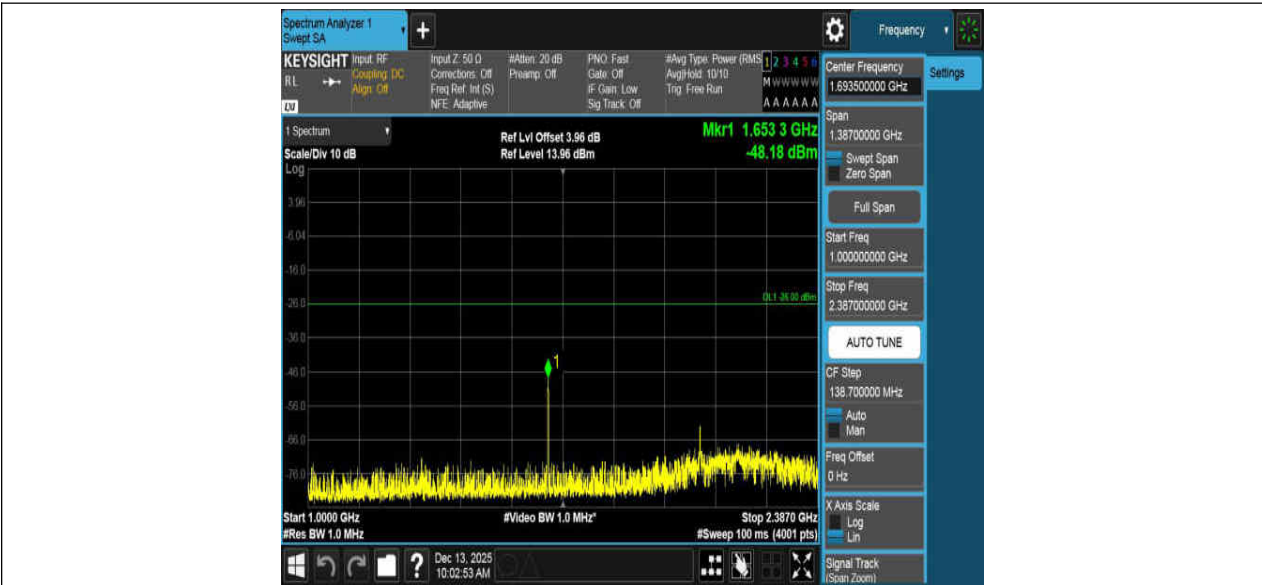

NTNV_3DH5_Ant1_2480_2387~2400



NTNV_3DH5_Ant1_2480_2483.5~2496.5

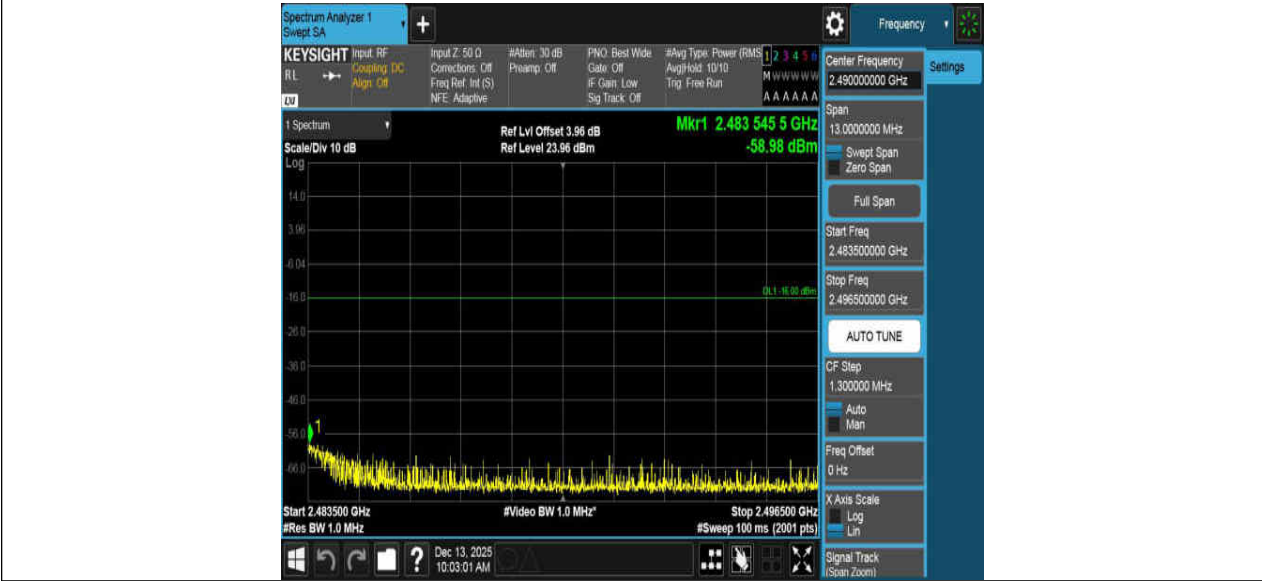

NTNV_3DH5_Ant1_2480_2496.5~13000




13. Secondary Radiated Emissions

13.1. Limit

The limit on secondary emissions radiated from the receiving equipment within which the function of other radio equipment will not be impaired shall be, in terms of the power of a dummy antenna circuit that has the same electrical constant as the receiving antenna, 4 nW or less at a frequency below 1 GHz and 20 nW or less at a frequency of 1 GHz or higher as measured using the circuit.

13.2. Block Diagram of Test Setup



13.3. Test Procedure

Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Resolution BW: 100 kHz for frequency below 1 GHz and 1 MHz for frequency above 1 GHz

Video BW: 100 kHz for frequency below 1 GHz and 1 MHz for frequency above 1 GHz

Detector: Peak.

Trace Mode: Max Hold.


All the emissions from 30 MHz to 13 GHz were measured and record.

13.4. Test Result

Test Condition	Test Mode	Antenna	Freq (MHz)	Freq.Range (MHz)	Result (dBm)	Limit (dBm)	Result (nW)	Limit (nW)	Verdict
NTNV	DH5	Ant1	2402	30~1000	-83.15	≤-54	0.00484	≤4	PASS
				1000~12500	-58.18	≤-47	1.52055	≤20	PASS
			2441	30~1000	-83.14	≤-54	0.00485	≤4	PASS
				1000~12500	-78.78	≤-47	0.01324	≤20	PASS
			2480	30~1000	-83	≤-54	0.00501	≤4	PASS
				1000~12500	-77.71	≤-47	0.01694	≤20	PASS
	2DH5	Ant1	2402	30~1000	-82.93	≤-54	0.00509	≤4	PASS
				1000~12500	-78.66	≤-47	0.01361	≤20	PASS
			2441	30~1000	-83	≤-54	0.00501	≤4	PASS
				1000~12500	-67.74	≤-47	0.16827	≤20	PASS
			2480	30~1000	-83.02	≤-54	0.00499	≤4	PASS
				1000~12500	-78.92	≤-47	0.01282	≤20	PASS
	3DH5	Ant1	2402	30~1000	-83.09	≤-54	0.00491	≤4	PASS
				1000~12500	-65.2	≤-47	0.30200	≤20	PASS
			2441	30~1000	-78.58	≤-54	0.0138	≤4	PASS

							7		
				1000~12500	-78.57	≤-47	0.01390	≤20	PASS
			2480	30~1000	-82.96	≤-54	0.00506	≤4	PASS
				1000~12500	-65.02	≤-47	0.31477	≤20	PASS

13.5. Original Test Data

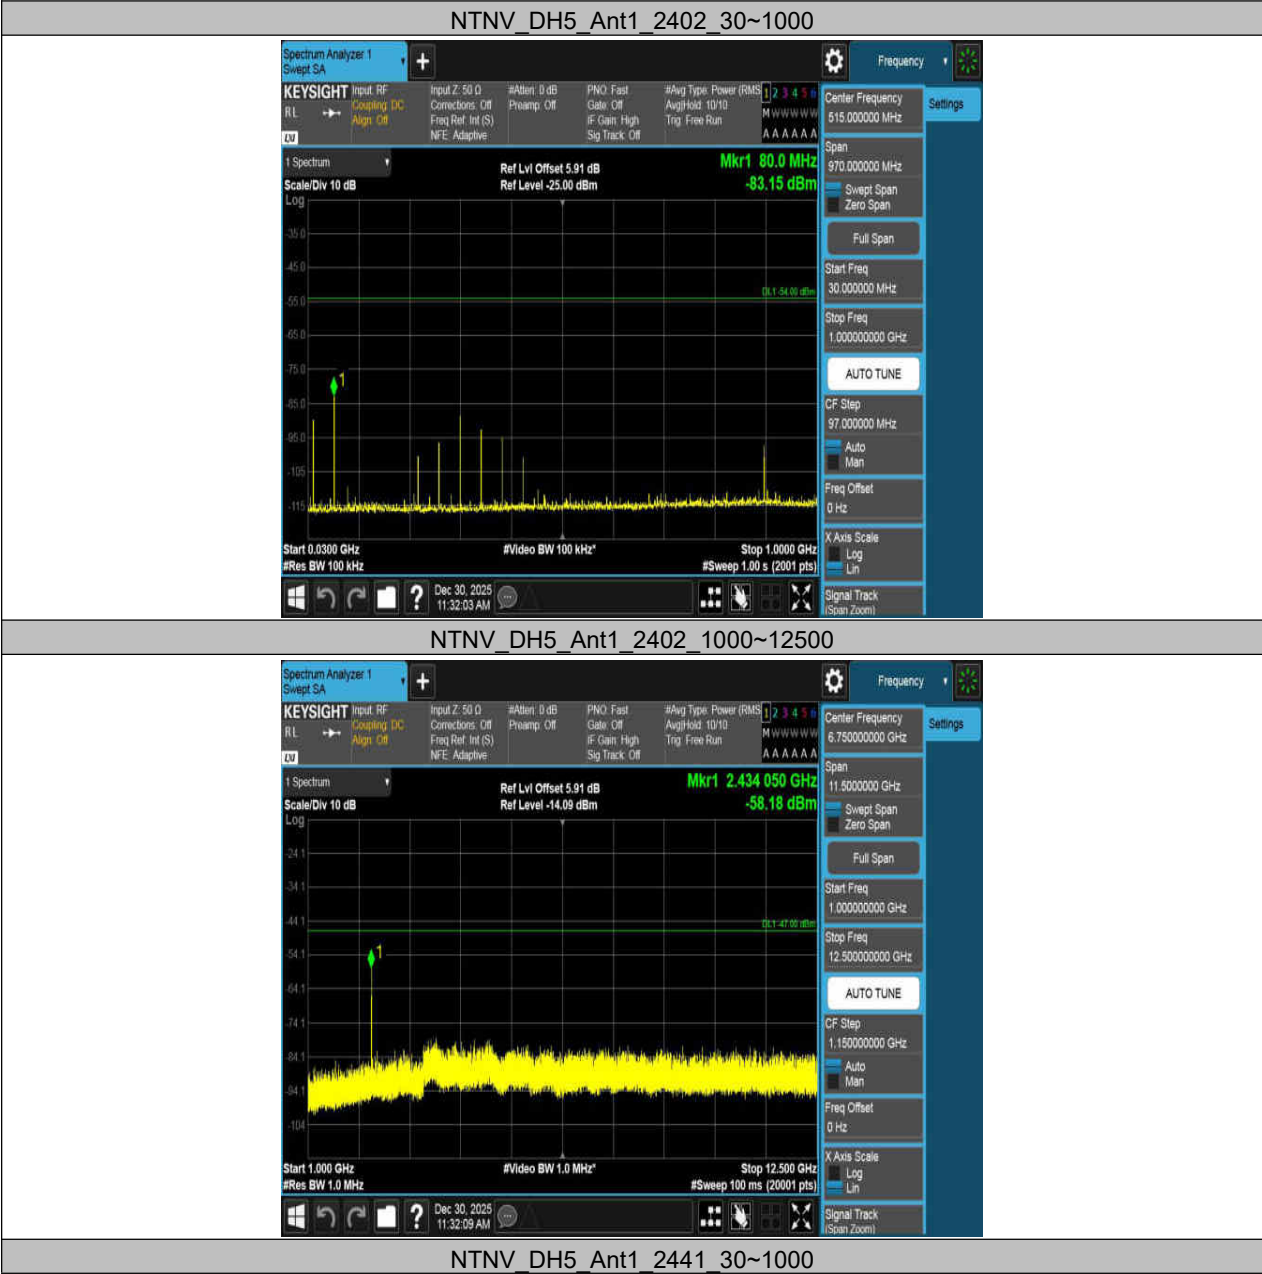



NTNV_DH5_Ant1_2441_1000~12500




NTNV_DH5_Ant1_2480_30~1000




NTNV_DH5_Ant1_2480_1000~12500




NTNV_2DH5_Ant1_2402_30~1000

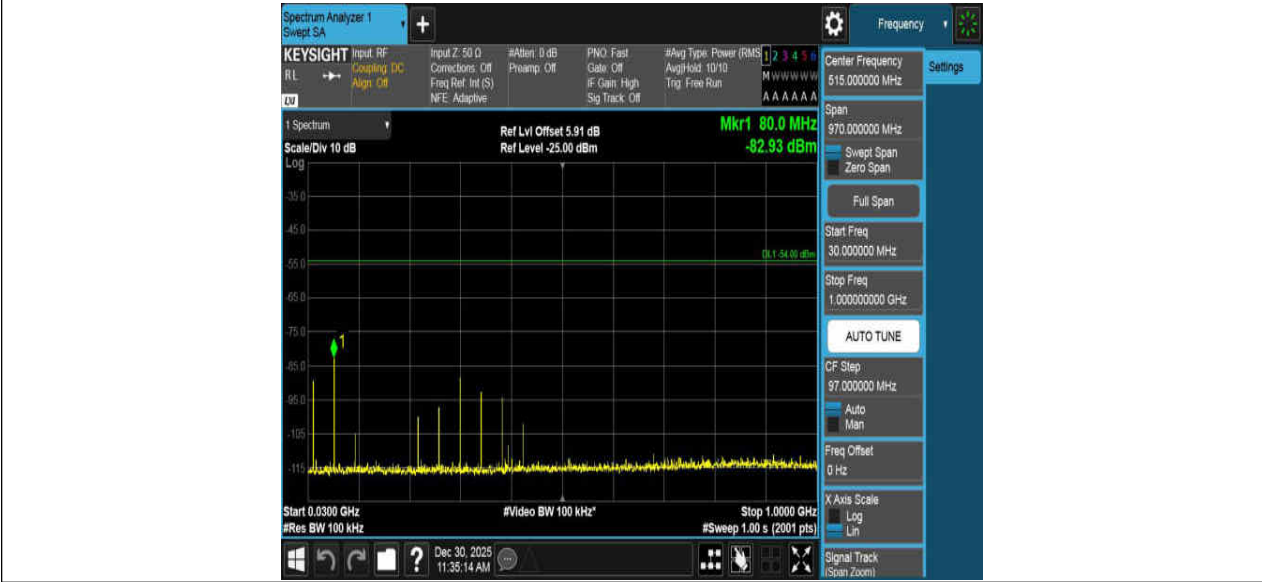


NTNV_2DH5_Ant1_2402_1000~12500

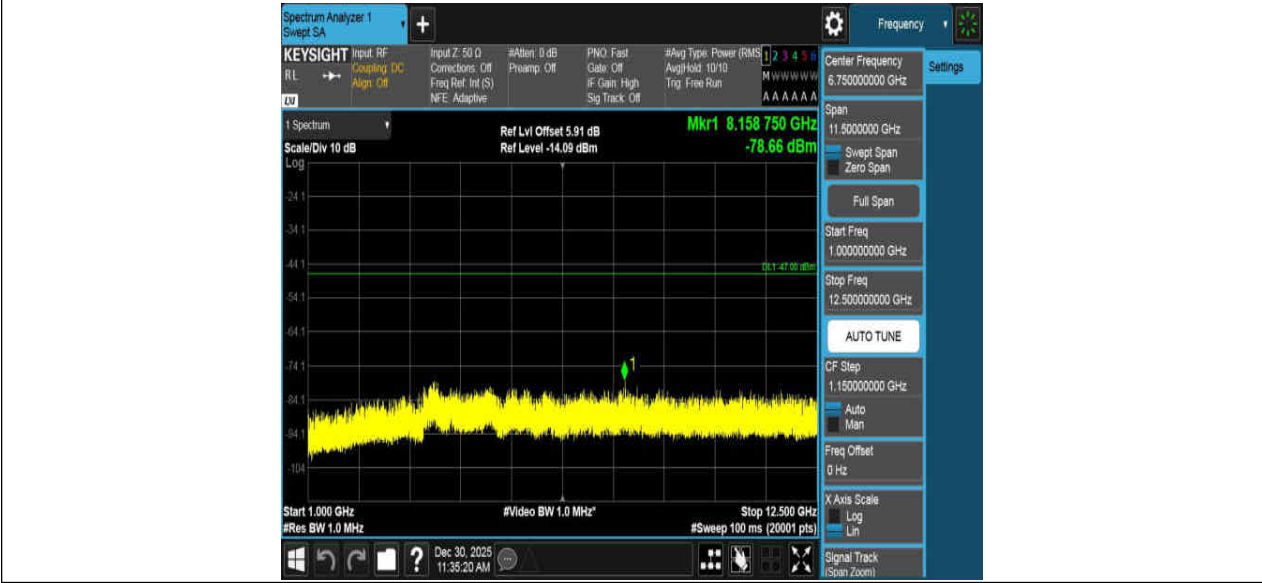


NTNV_2DH5_Ant1_2441_30~1000

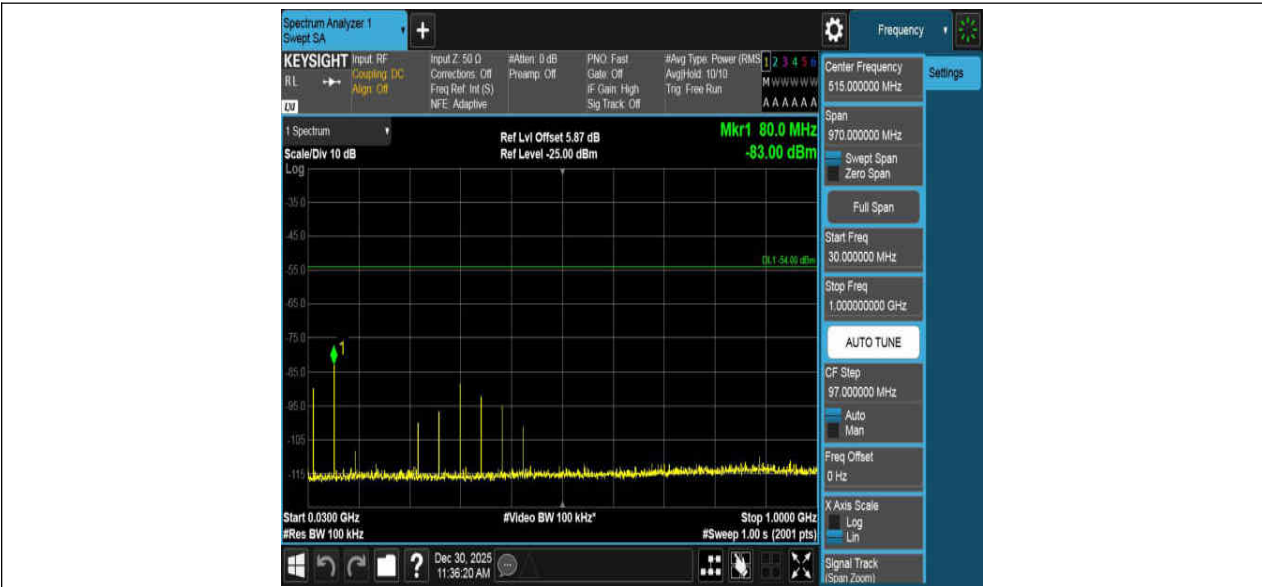

NTNV_2DH5_Ant1_2441_1000~12500

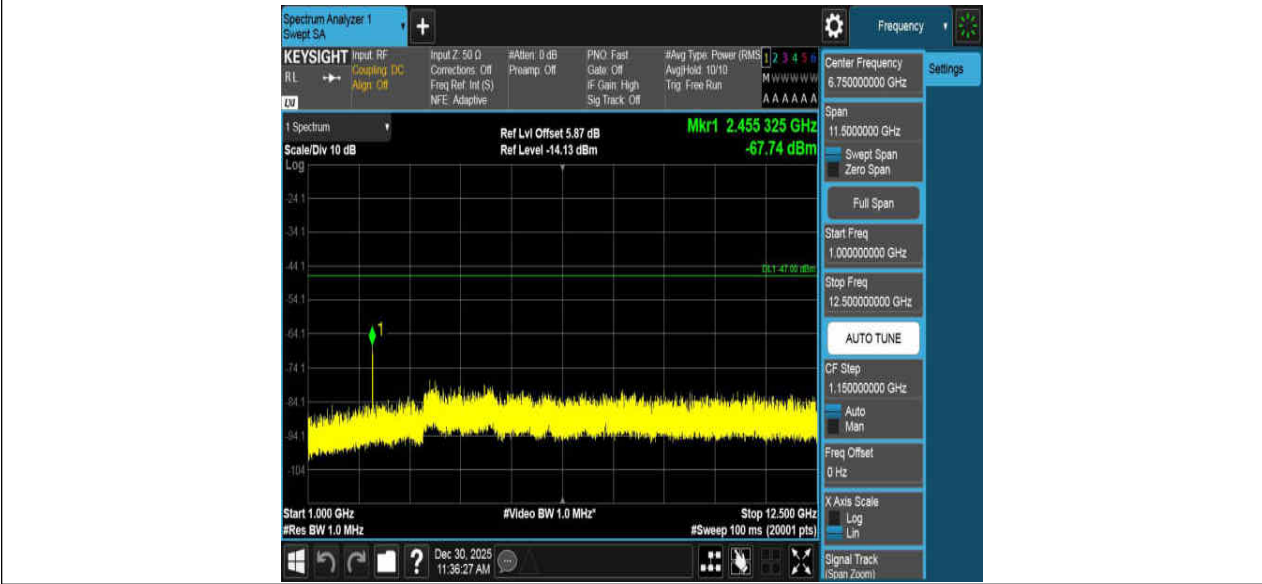


NTNV_2DH5_Ant1_2480_30~1000

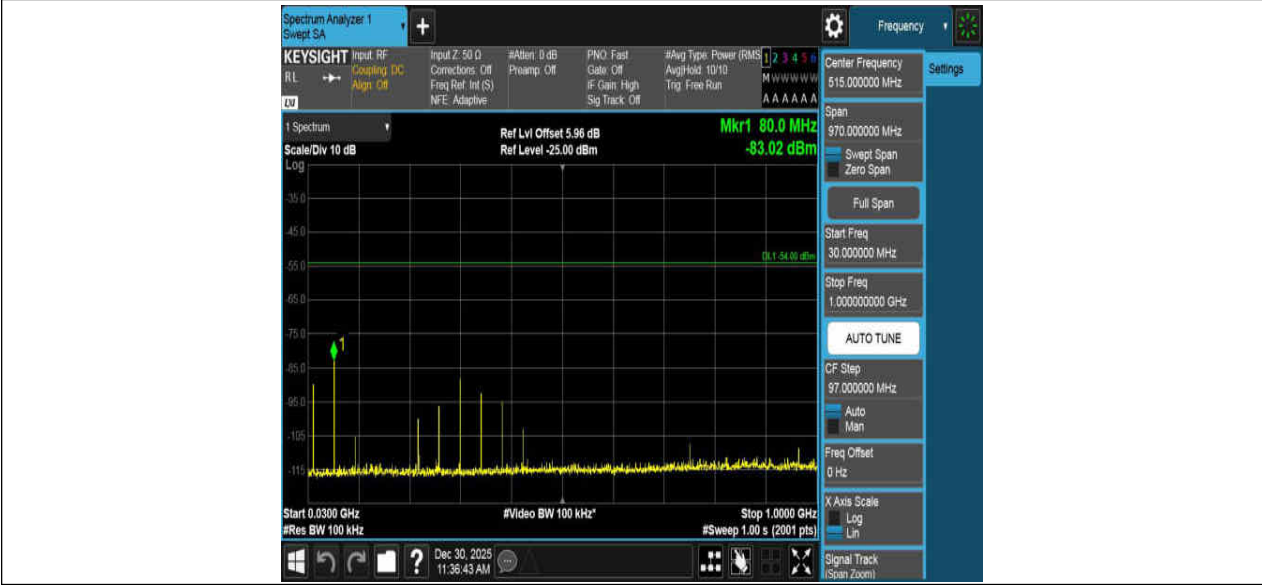


NTNV_2DH5_Ant1_2480_1000~12500



NTNV_3DH5_Ant1_2402_30~1000

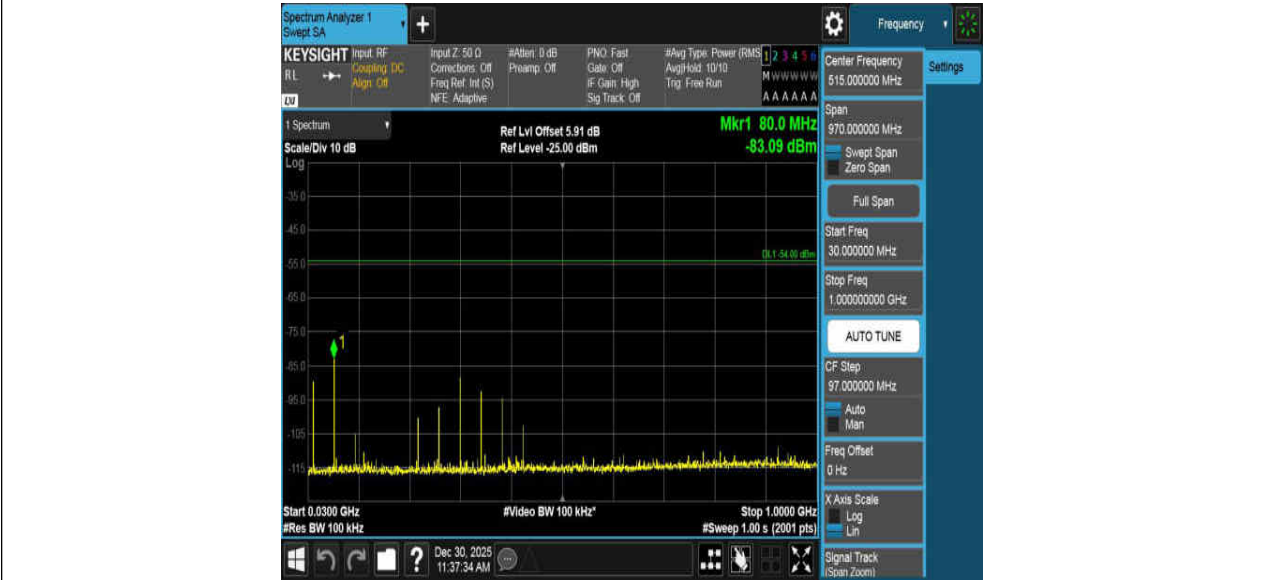

NTNV_3DH5_Ant1_2402_1000~12500

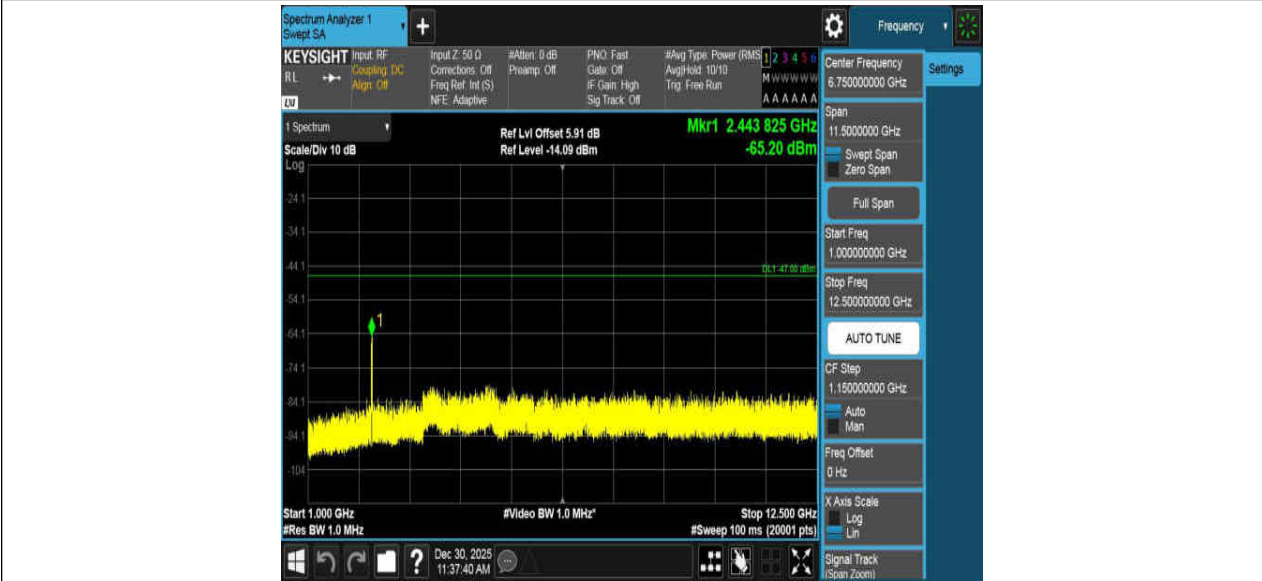

NTNV_3DH5_Ant1_2441_30~1000



NTNV_3DH5_Ant1_2441_1000~12500



NTNV_3DH5_Ant1_2480_30~1000




NTNV_3DH5_Ant1_2480_1000~12500



14. Interference prevention function

14.1. Measurement System Diagram

(1) When transmitting identification code



(2) Condition of measuring instrument


Demodulator must be able to demodulate the transmitting signal emitted by test equipment and to indicate the identification code.

(3) Condition of test equipment the mode of normal use.

14.2. Measuring Operation Procedure

When test equipment has the function to transmit identification code automatically:

- (A) Transmit the predetermined identification code from test equipment.
- (B) Confirm the transmitted identification code by demodulator.



14.3. Test Result

Test result: The unit does meet the requirements.
PASS

Report End