


Notification No.88 of MIC TEST REPORT

Applicant:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Manufacturer:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Product Description:	IEEE 802.11 a/b/g/n/ac/ax 1T1R USB+SDIO Wi-Fi Integrated Bluetooth 2.1+EDR/3.0/4.x/5.2/5.3
Brand Name:	N/A
Tested Model:	SKI.WB800D80S.1
Report No.:	JCF251201101-008
Received Date:	Dec. 01, 2025
Tested Date:	Dec. 01, 2025 - Dec. 30, 2025
Issued Date:	Dec. 30, 2025
Test Standards:	Notification No.88 of MIC, Annex 43 Article 2 Paragraph 1 of Item 19
Test Result:	Pass

Prepared By:



Kennys Zhang/Engineer
Date: Dec. 30, 2025

Reviewed By:



Roger Li/Engineer
Date: Dec. 30, 2025

Approved By:



Talent Zhang/Engineer
Date: Dec. 30, 2025

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangzhou Jingce Testing Technology Co., Ltd. the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
/	/	Dec. 30, 2025	Original Report	/

Table of Contents

1. Test Report Declare	4
2. Summary Test Results	5
3. Test Laboratory	5
4. Equipment Under Test	6
4.1. Description of EUT	6
4.2. Channel List	6
4.3. Test Channel Configuration	7
4.4. Test Environment Conditions	7
4.5. The Worse Case Power Setting Parameter	7
4.6. Description of Available Antennas	8
5. Description of Test Setup	8
5.1. Accessory	8
5.2. Support Equipment	8
5.3. Test Setup	8
5.4. Setup Diagram for Tests	8
6. Measurement Uncertainty	8
7. Measuring Instrument and Software Used	9
8. Antenna Power	10
8.1. Limit	10
8.2. Block Diagram of Test Setup	10
8.3. Test Procedure	10
8.4. Test Result	10
9. Frequency Tolerance	12
9.1. Limit	12
9.2. Block Diagram of Test Setup	12
9.3. Test Procedure	12
9.4. Test Result	12
9.5. Original Test Data	12
10. Occupied Frequency Bandwidth	15
10.1. Limit	15
10.2. Block Diagram of Test Setup	15
10.3. Test Procedure	15
10.4. Test Result	15
10.5. Original Test Data	15
11. Transmitter Spurious Emissions (conducted)	18
11.1. Limit	18
11.2. Block Diagram of Test Setup	18
11.3. Test Procedure	18
11.4. Test Result	18
11.5. Original Test Data	20
12. Secondary Radiated Emissions	30
12.1. Limit	30
12.2. Block Diagram of Test Setup	30
12.3. Test Procedure	30
12.4. Test Result	30
12.5. Original Test Data	31
13. Interference Prevention Function	35
13.1. Measurement System Diagram	35
13.2. Measuring Operation Procedure	35
13.3. Test Result	35

1. Test Report Declare

Applicant:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Manufacturer:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Product Name:	IEEE 802.11 a/b/g/n/ac/ax 1T1R USB+SDIO Wi-Fi Integrated Bluetooth 2.1+EDR/3.0/4.x/5.2/5.3
Brand Name:	N/A
Model Name:	SKI.WB800D80S.1
Difference Description:	N/A

We Declare:

The equipment described above is tested by Guangzhou Jingce Testing Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangzhou Jingce Testing Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests except as provided information by clients.

2. Summary Test Results

Clause	Test Item	Results
3.2 (2)	Antenna Power	PASS
3.2 (3)	Tolerances for Antenna Power	PASS
3.2 (4)	Frequency Tolerance	PASS
3.2 (5)	Transmission Rate	N/A
3.2 (7)	Occupied Frequency Bandwidth	PASS
3.2 (10)	Number of Carriers	N/A
3.2 (11)	Dwell Time	N/A
3.2 (6)	Spurious Emissions	PASS
---	Carrier Sense	N/A
3.6	Process Gain	N/A
3.3 (1)	Secondary Radiated Emissions	PASS
N/A is an abbreviation for Not Applicable.		

3. Test Laboratory

Guangzhou Jingce Testing Technology Co., Ltd.

Add.: No.10, Hefeng No.1 street, Huangpu District, Guangzhou, Guangdong, People's Republic of China

Association for Laboratory Accreditation(A2LA). Certificate Number: 6594.03

FCC Designation Number: CN1381. Test Firm Registration Number: 486550

IC Test Firm Registration Number: 31808

Conformity Assessment Body identifier: CN0173

4. Equipment Under Test

4.1. Description of EUT

EUT* Name:	IEEE 802.11 a/b/g/n/ac/ax 1T1R USB+SDIO Wi-Fi Integrated Bluetooth 2.1+EDR/3.0/4.x/5.2/5.3
Model Number:	SKI.WB800D80S.1
EUT Function Description:	Please refer to user manual of this device
Power Supply:	DC 3.3V
Sample No.:	251201101-01-01
Hardware Version:	N/A
Software Version:	N/A
Radio Specification:	Bluetooth V5.4
Operation Frequency:	2402 MHz - 2480 MHz
Modulation:	GFSK
Data Rate:	1Mbps, 2Mbps,
Antenna Type:	FPC Antenna, MAX. Gain: 2.9 dBi

Note 1: EUT is the ab. of equipment under test.

Note 2: The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.

4.2. Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2424	22	2446	33	2468
1	2404	12	2426	23	2448	34	2470
2	2406	13	2428	24	2450	35	2472
3	2408	14	2430	25	2452	36	2474
4	2410	15	2432	26	2454	37	2476
5	2412	16	2434	27	2456	38	2478
6	2414	17	2436	28	2458	39	2480
7	2416	18	2438	29	2460	/	/
8	2418	19	2440	30	2462	/	/
9	2420	20	2442	31	2464	/	/
10	2422	21	2444	32	2466	/	/


4.3. Test Channel Configuration

Tested mode, channel, information		
Mode	Channel	Frequency (MHz)
GFSK	LCH:CH0	2402
	MCH:CH19	2440
	HCH:CH39	2480
Rx mode	LCH:CH0	2402
	MCH:CH19	2440
	HCH:CH39	2480

4.4. Test Environment Conditions

/	Normal Conditions
Temperature range	21-25 °C
Humidity range	40-75%
Power supply	DC 3.3V

When EUT be operated at 10% from the normal supply voltage, the supply voltage of RF part was varied within 1%. All test cases were done under the normal supply voltage.

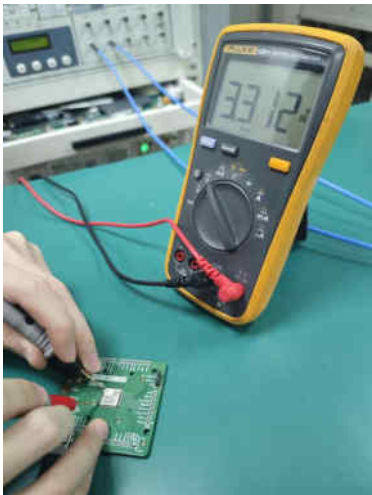Power supply voltage 3.3Vdc (Normal)	Power supply voltage 3.63Vdc (+10%)	Power supply voltage 2.97Vdc (-10%)
3.312V	3.312V	3.312V
Measurement point		
		

4.5. The Worse Case Power Setting Parameter

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		QATool_Dbg		
Modulation Type	Transmit Antenna Number	Test Software Setting Value		
		CH 00	CH 39	CH 78
GFSK 1M	1	Default	Default	Default
GFSK 2M	1	Default	Default	Default

4.6. Description of Available Antennas

Test Mode	Transmit and Receive Mode	Description
GFSK	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

5. Description of Test Setup

5.1. Accessory

Description of Accessories	Manufacturer	Model Number	Description	Remark
/	/	/	/	/

5.2. Support Equipment

Equipment	Brand Name	Model Name	P/N
PC	Lenovo	T480	/

5.3. Test Setup

The EUT can work in fixed frequency mode.

5.4. Setup Diagram for Tests



6. Measurement Uncertainty

Test Item	Uncertainty
Occupied Channel Bandwidth	1.1%
Uncertainty for radio frequency	$\pm 35.28\text{Hz}$
RF Output power, conducted	0.76dB
Power Spectral Density, Conducted	0.82dB
Unwanted Emissions, Conducted	3.09dB
Temperature	0.4°C
Humidity	1.3%
DC and Low frequency voltage	$\pm 0.006\text{V}$
Time	0.6%
Duty cycle	0.48%

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

7. Measuring Instrument and Software Used

TS Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Spectrum Analyzer	Keysight	N9030B	MY56320512	Jul. 31, 2025	Jul. 30, 2026
☒	Vector Signal Generator	Keysight	N5182B	MY57300334	Jul. 31, 2025	Jul. 30, 2026
☒	Signal Generator	Keysight	N5171B	MY57280639	Jul. 31, 2025	Jul. 30, 2026
☒	DC POWER	Keysight	E342A	MY59020356	Jul. 31, 2025	Jul. 30, 2026
☒	Control unit(Power sensor)	Tonscend	JS0806-2	/	Aug. 01, 2025	Jul. 31, 2026
Software						
Used	Description	Manufacturer		Name		Version
☒	Test software	TS+		JS1120-3		V3.3.10


Measuring Equipment Calibration Information		
Used	Calibration Company Abbreviation	Full Name of calibration company
☒	GRG	GRG METROLOGY & TEST GROUP CO.,LTD.
Calibration Information (Article 24-2, Paragraph 4 of the Radio Act)		
☐	(a) Calibration conducted by the National institute of information and Communications Technology (NICT) or a designated calibration agency under Article 102-18-1 of the Radio Act	
☐	(b) Calibration conducted based on the regulations of Article 135 or 144 of the Measurement Act	
☒	(c) Calibration conducted in foreign countries, which is equivalent to calibration conducted by the NICT or a designated calibration agency under Article 102-18-1 of the Radio Act	
☐	(d) Calibration, etc. Conducted by using measuring instruments and other facilities listed at the bottom of appended table 3 of the Radio Act, which is to have been calibrated as described in (a) through (c) above	

8. Antenna Power

8.1. Limit

Limit	10mW (10dBm)
Tolerance	+20%

8.2. Block Diagram of Test Setup



8.3. Test Procedure

(1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the channel under test.

Resolution BW: 1 MHz.

Video BW: 1 MHz.

Span: 10 MHz.

Detector: Peak.

Trace Mode: Max Hold.

(2) When the trace is complete, search the frequency of peak power

Note: The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.

8.4. Test Result

Antenna Power							
Test Condition	Test Mode	Ant.	Freq (MHz)	Result (dBm)	Result (mW)	Limit (mW)	Verdict
NTNV	BLE_1M	Ant1	2402	3.63	2.3067	≤10	PASS
			2440	3.68	2.3335	≤10	PASS
			2480	4.60	2.8840	≤10	PASS
	BLE_2M	Ant1	2402	3.54	2.2594	≤10	PASS
			2440	3.76	2.3768	≤10	PASS
			2480	4.46	2.7925	≤10	PASS

Tolerance								
Test Condition	Test Mode	Ant.	Freq (MHz)	Power (mW)	Rated Power (mW)	Result (%)	Limit (%)	Verdict
NTNV	BLE_1M	Ant1	2402	2.3067	3	-23.11	+20%	PASS
			2440	2.3335	3	-22.22	+20%	PASS
			2480	2.8840	3	-3.87	+20%	PASS
	BLE_2M	Ant1	2402	2.2594	3	-24.69	+20%	PASS
			2440	2.3768	3	-20.77	+20%	PASS
			2480	2.7925	3	-6.92	+20%	PASS

EIRP							
Test Condition	Test Mode	Ant.	Freq (MHz)	Power (dBm)	EIRP (dBm)	Limit (dBm)	Verdict
NTNV	BLE_1M	Ant1	2402	3.63	6.53	≤12.14	PASS

			2440	3.68	6.58	≤ 12.14	PASS
			2480	4.60	7.50	≤ 12.14	PASS
	BLE_2M	Ant1	2402	3.54	6.44	≤ 12.14	PASS
			2440	3.76	6.66	≤ 12.14	PASS
			2480	4.46	7.36	≤ 12.14	PASS


Note: Tolerances for Antenna Power Limit: +20%

9. Frequency Tolerance

9.1. Limit

+/- 50 x 10⁻⁶ or less (50ppm)

9.2. Block Diagram of Test Setup




9.3. Test Procedure

- (1) Set EUT work in carrier TX mode.
- (2) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:
 Centre Frequency: The centre frequency of the channel under test.
 Resolution BW: 10 kHz.
 Video BW: 10 kHz.
 Span: 1 MHz.
 Detector: Peak.
 Trace Mode: Max Hold.
- (3) When the trace is complete, find the peak value of the power envelope and record the frequency.

9.4. Test Result

Test Condition	Test Mode	Ant.	Freq. (MHz)	Result (ppm)	Limit (ppm)	Verdict
NTNV	BLE_1M	Ant1	2402	-1.24896	±50	PASS
			2440	-2.45902	±50	PASS
			2480	-2.41936	±50	PASS
	BLE_2M	Ant1	2402	-1.24896	±50	PASS
			2440	-3.68853	±50	PASS
			2480	-2.41936	±50	PASS

9.5. Original Test Data

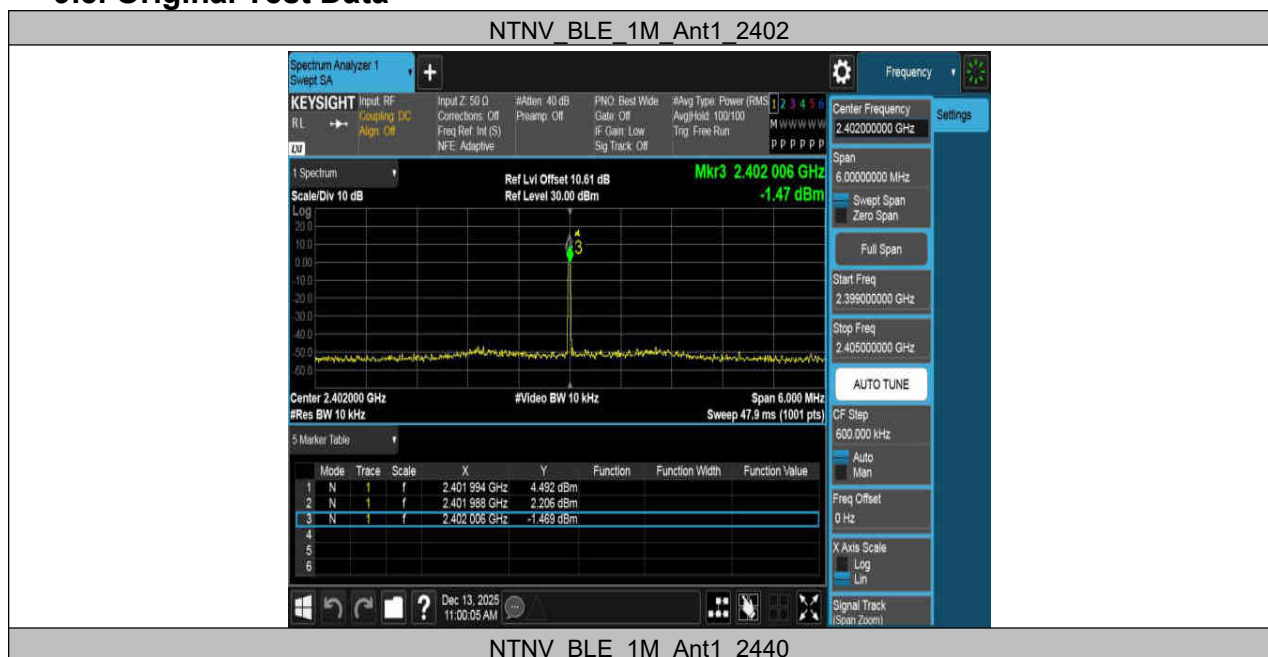



NTNV_BLE_1M_Ant1_2480



NTNV_BLE_2M_Ant1_2402



NTNV_BLE_2M_Ant1_2440



NTNV_BLE_2M_Ant1_2480




10. Occupied Frequency Bandwidth

10.1. Limit

26MHz or less

10.2. Block Diagram of Test Setup



10.3. Test Procedure

(1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the channel under test.

Resolution BW: 300 kHz

Video BW: 300 kHz

Span: 10 MHz

Detector: Peak.


Trace Mode: Max Hold.


(2) When the trace is complete, measure the Occupied bandwidth (99% bandwidth) with spectrum analyzer's bandwidth measure function.

10.4. Test Result


Test Condition	Test Mode	Ant.	Freq. (MHz)	Result (MHz)	Limit (MHz)	Verdict
NTNV	BLE_1M	Ant1	2402	1.219	≤26	PASS
			2440	1.225	≤26	PASS
			2480	1.223	≤26	PASS
	BLE_2M	Ant1	2402	2.134	≤26	PASS
			2440	2.157	≤26	PASS
			2480	2.141	≤26	PASS

10.5. Original Test Data

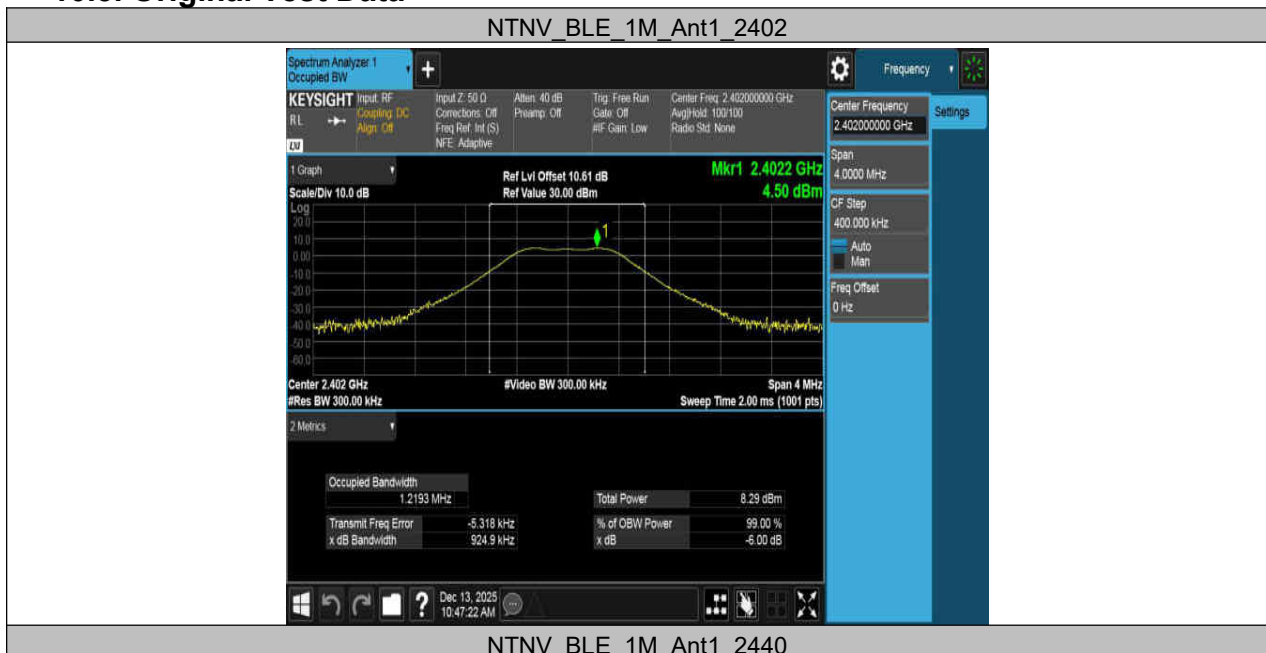

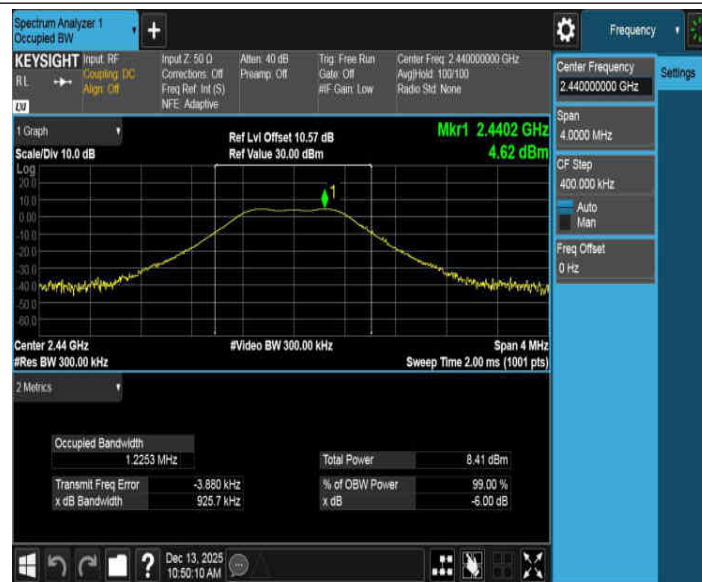

NTNV_BLE_1M_Ant1_2480

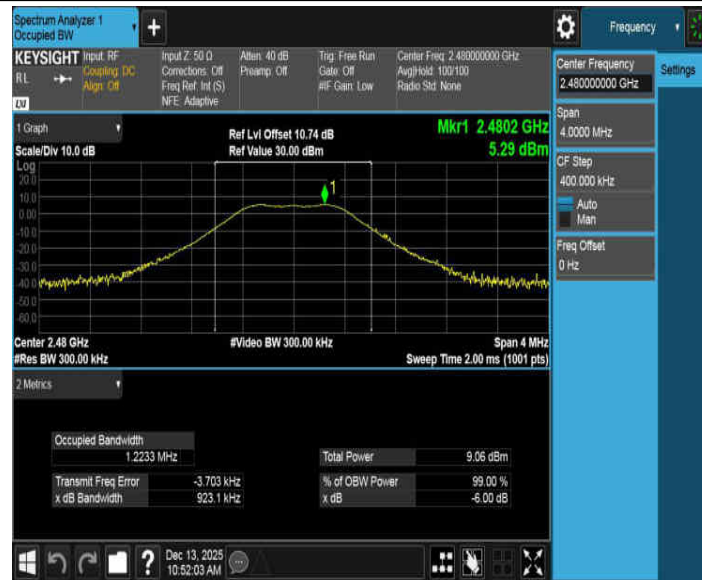

NTNV_BLE_2M_Ant1_2402



NTNV_BLE_2M_Ant1_2440



NTNV_BLE_2M_Ant1_2480




11. Transmitter Spurious Emissions (conducted)

11.1. Limit

Permissible mean power of spurious emission of each frequency supplied to a feeder, that is, mean power of spurious emission in the 1 MHz bandwidth at frequency f other than frequency band used shall be as follows:

- a. $2,387 \text{ MHz} \leq f \leq 2,400 \text{ MHz}$ and $2,483.5 \text{ MHz} < f \leq 2,496.5 \text{ MHz}$ 25 μW or less
- b. $2,387 \text{ MHz} > f$ and $2,496.5 \text{ MHz} < f$ 2.5 μW or less

11.2. Block Diagram of Test Setup



11.3. Test Procedure

(1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Resolution BW: 1 MHz. Video BW: 1 MHz.

Detector: Peak. Trace Mode: Max Hold.

(3) All the emissions from 30MHz to 13GHz were measured and record.

11.4. Test Result

Note: If spurious emissions are greater than (limit -3 dB) in 1 MHz RBW, then more detailed measurements are required. Repeat the test in 30 kHz RBW, the spurious emission value using following the formula below:

Calculated Value = (Measured Value + 15.2 dB)

15.2 dB adjustment is derived from the Conversion Factor of RBW

Conversion Factor of RBW = $10 \times \log (\text{Reference Bandwidth} / \text{RBW of measurement}) = 15.2(\text{dB})$


Where: Reference Bandwidth = 1 MHz

RBW of measurement = 30 kHz

Test Condition	Test Mode	Ant.	Freq (MHz)	Freq. Range (MHz)	Result (dBm)	Limit (dBm)	Result (μW)	Limit (μW)	Verdict
NTNV	BLE_1M	Ant1	2402	30~1000	-62.18	≤ -36	0.00061	≤ 0.3	PASS
				1000~2387	-44.59	≤ -26	0.03475	≤ 2.5	PASS
				2387~2400	-37.76	≤ -16	0.16749	≤ 25	PASS
				2483.5~2496.5	-56.94	≤ -16	0.00202	≤ 25	PASS
				2496.5~13000	-45.32	≤ -26	0.02938	≤ 2.5	PASS
			2440	30~1000	-61.46	≤ -36	0.00071	≤ 0.3	PASS
				1000~2387	-44.07	≤ -26	0.03917	≤ 2.5	PASS
				2387~2400	-58.55	≤ -16	0.00140	≤ 25	PASS
				2483.5~2496.5	-57.97	≤ -16	0.00160	≤ 25	PASS
				2496.5~13000	-45.54	≤ -26	0.02793	≤ 2.5	PASS
			2480	30~1000	-60.61	≤ -36	0.00087	≤ 0.3	PASS

				1000~2387	-43.69	≤-26	0.04276	≤2.5	PASS
				2387~2400	-57.87	≤-16	0.00163	≤25	PASS
				2483.5~2496.5	-55.72	≤-16	0.00268	≤25	PASS
				2496.5~13000	-45.22	≤-26	0.03006	≤2.5	PASS
	BLE_2M	Ant1	2402	30~1000	-59.95	≤-36	0.00101	≤0.3	PASS
				1000~2387	-45.03	≤-26	0.03141	≤2.5	PASS
				2387~2400	-22.09	≤-16	6.18016	≤25	PASS
				2483.5~2496.5	-58.04	≤-16	0.00157	≤25	PASS
				2496.5~13000	-47.27	≤-26	0.01875	≤2.5	PASS
			2440	30~1000	-62.66	≤-36	0.00054	≤0.3	PASS
				1000~2387	-44.48	≤-26	0.03565	≤2.5	PASS
				2387~2400	-57.16	≤-16	0.00192	≤25	PASS
				2483.5~2496.5	-58.77	≤-16	0.00133	≤25	PASS
				2496.5~13000	-47.26	≤-26	0.01879	≤2.5	PASS
			2480	30~1000	-61.38	≤-36	0.00073	≤0.3	PASS
				1000~2387	-44.49	≤-26	0.03556	≤2.5	PASS
				2387~2400	-57.63	≤-16	0.00173	≤25	PASS
				2483.5~2496.5	-52.87	≤-16	0.00516	≤25	PASS
				2496.5~13000	-45.19	≤-26	0.03027	≤2.5	PASS

11.5. Original Test Data

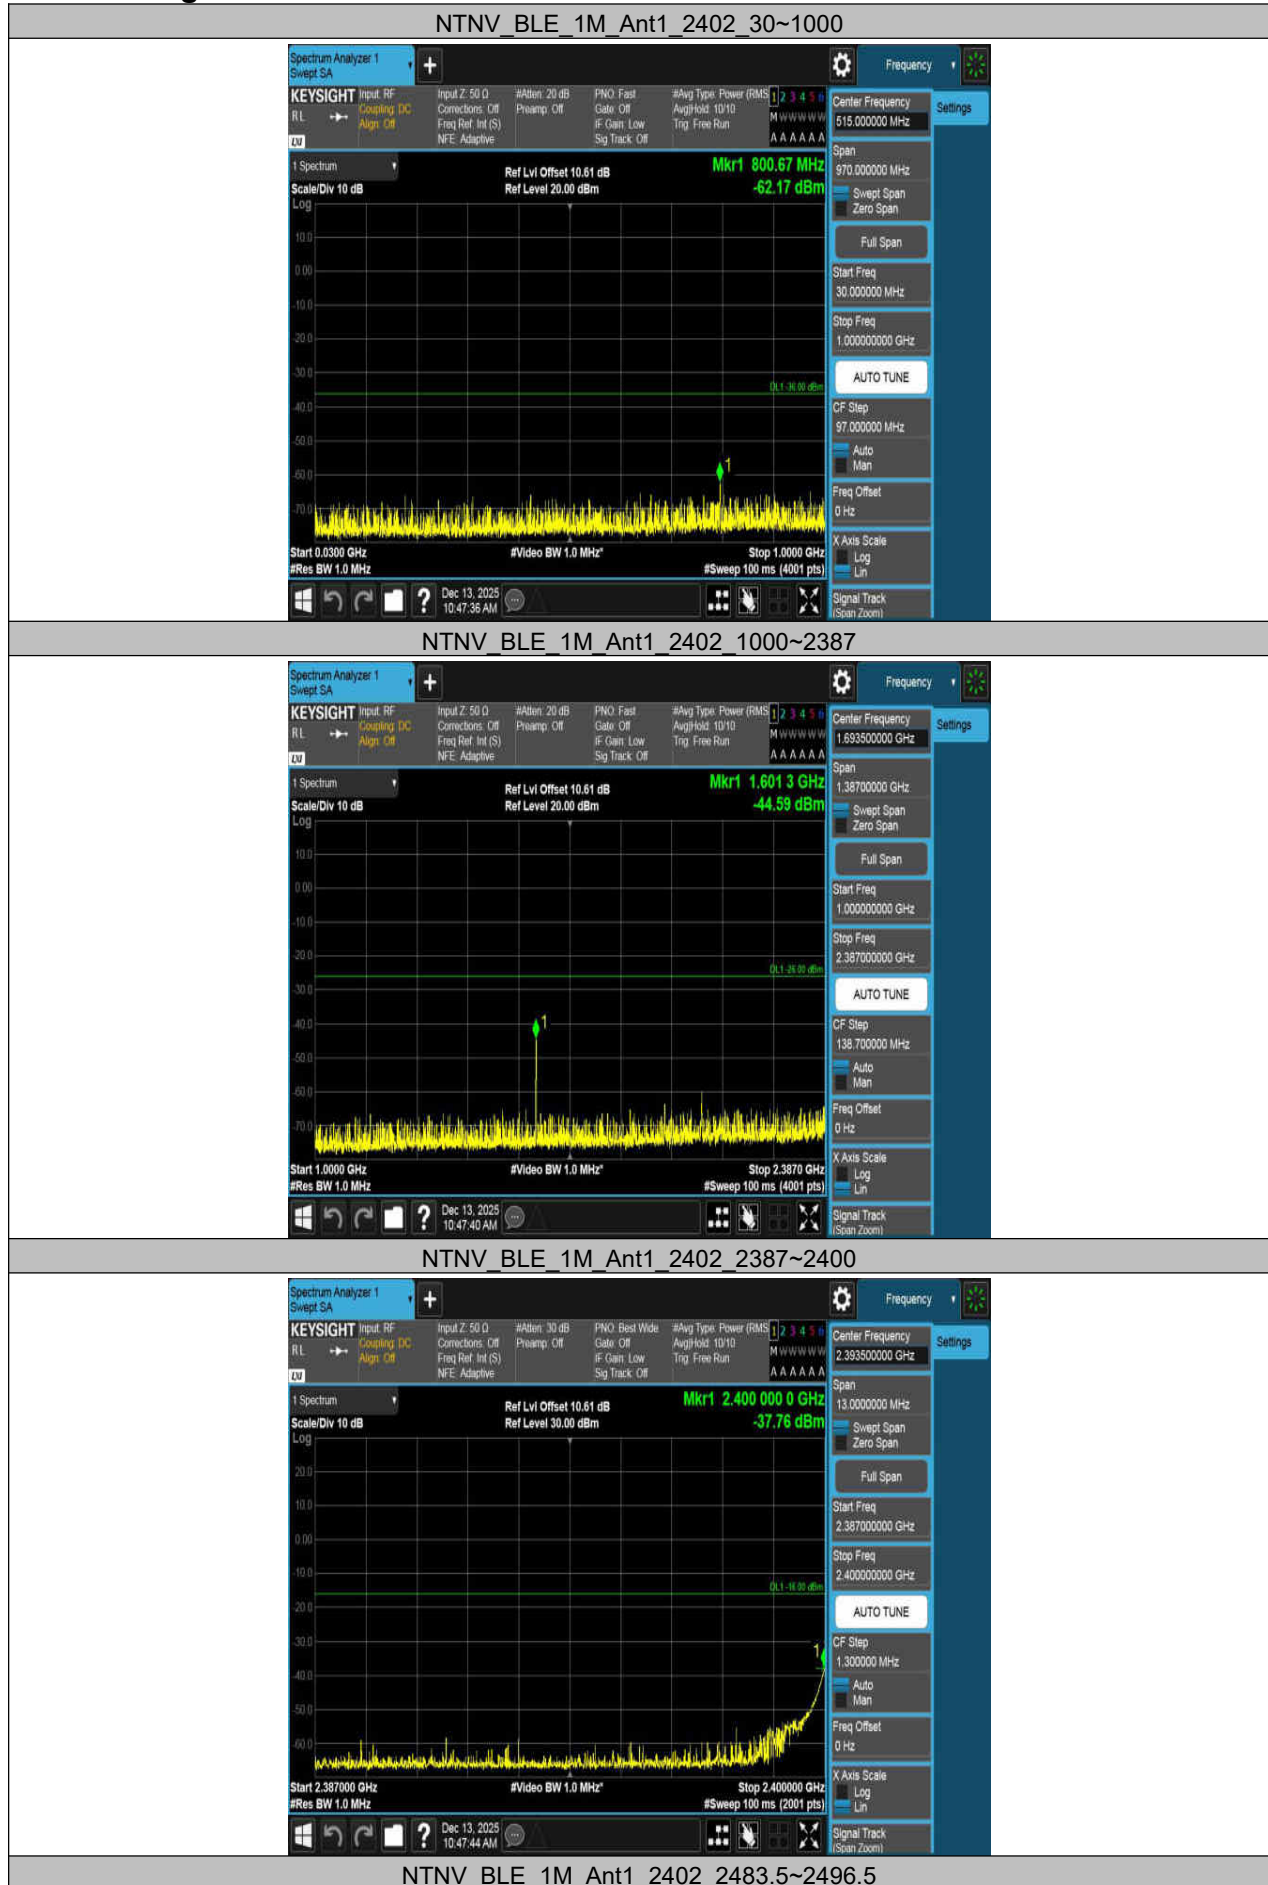




NTNV_BLE_1M_Ant1_2402_2496.5~13000



NTNV_BLE_1M_Ant1_2440_30~1000



NTNV_BLE_1M_Ant1_2440_1000~2387

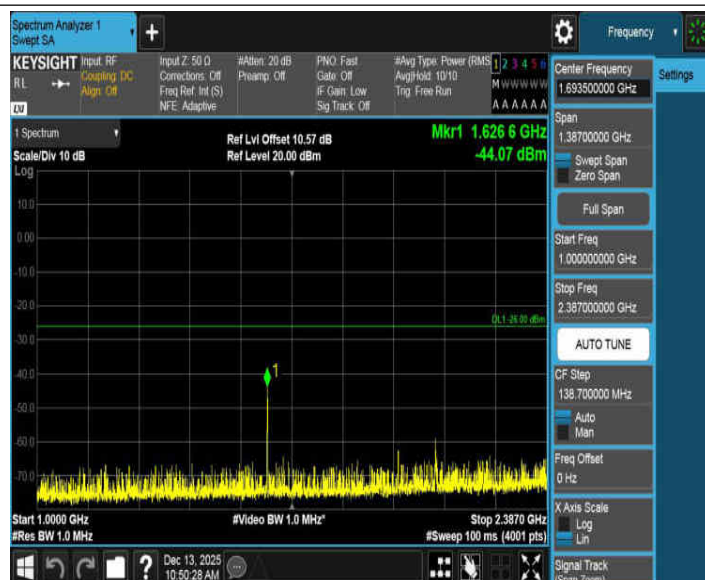


NTNV_BLE_1M_Ant1_2440_2387~2400



NTNV_BLE_1M_Ant1_2440_2483.5~2496.5



NTNV_BLE_1M_Ant1_2440_2496.5~13000

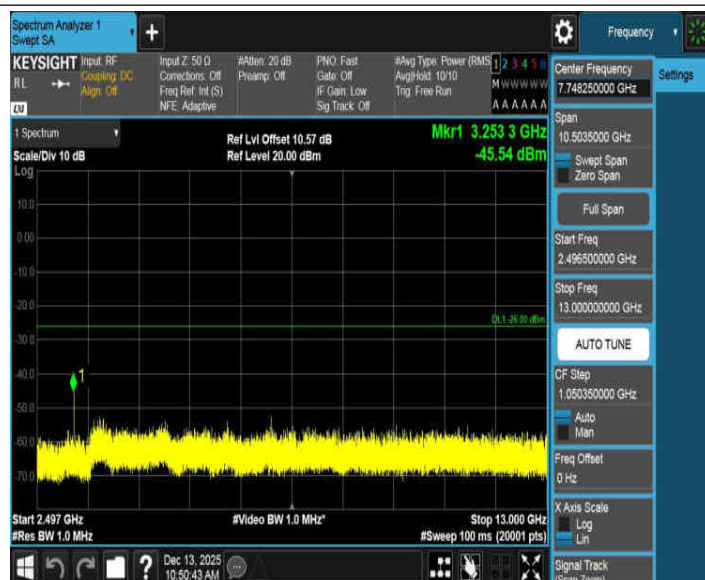

NTNV BLE 1M Ant1 2480 30~1000



NTNV BLE 1M Ant1 2480 1000~2387



NTNV BLE 1M Ant1 2480 2387~2400



NTNV BLE 1M Ant1 2480 2483.5~2496.5




NTNV BLE 1M Ant1 2480 2496.5~13000



NTNV BLE 2M Ant1 2402 30~1000



NTNV_BLE_2M_Ant1_2402_1000~2387

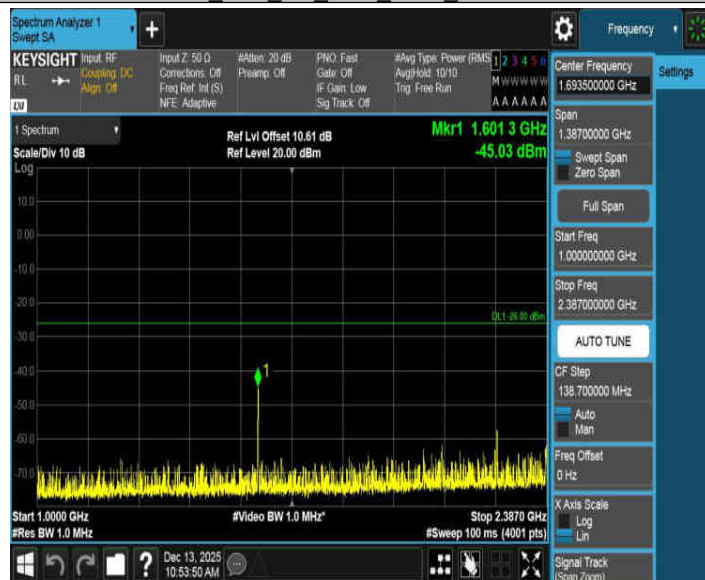


NTNV_BLE_2M_Ant1_2402_2387~2400



NTNV_BLE_2M_Ant1_2402_2483.5~2496.5



NTNV_BLE_2M_Ant1_2402_2496.5~13000

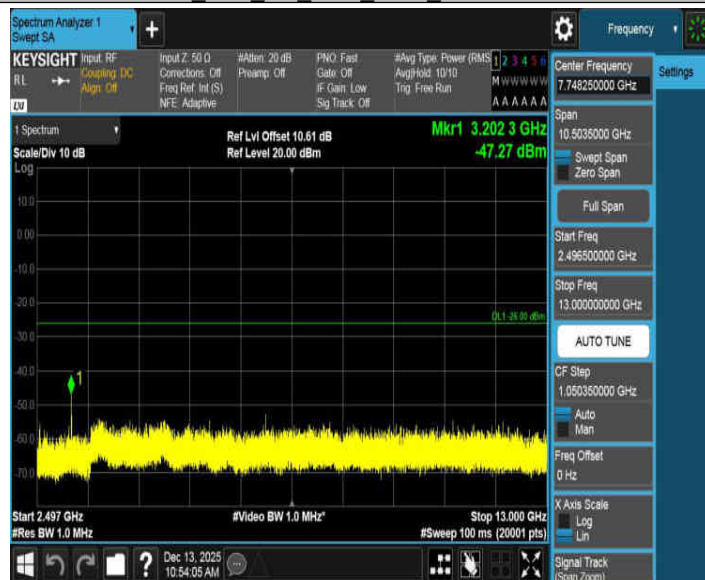

NTNV_BLE_2M_Ant1_2440_30~1000



NTNV_BLE_2M_Ant1_2440_1000~2387




NTNV_BLE_2M_Ant1_2440_2387~2400



NTNV_BLE_2M_Ant1_2440_2483.5~2496.5



NTNV_BLE_2M_Ant1_2440_2496.5~13000

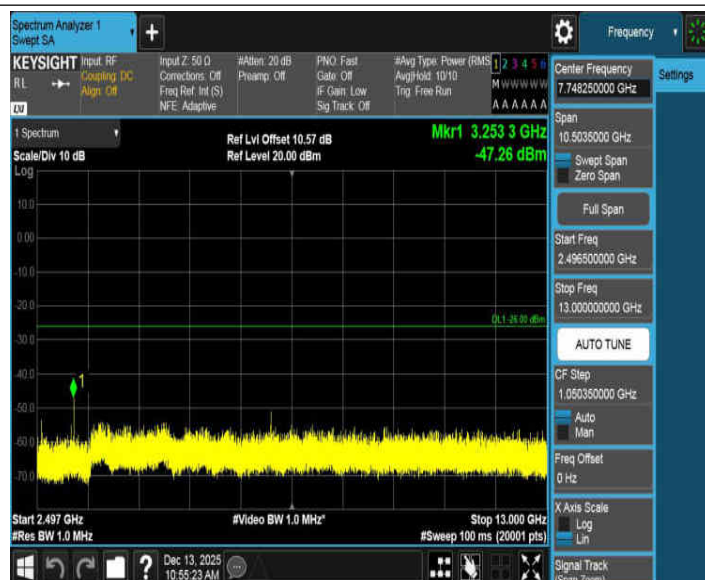


NTNV_BLE_2M_Ant1_2480_30~1000



NTNV_BLE_2M_Ant1_2480_1000~2387



NTNV_BLE_2M_Ant1_2480_2387~2400

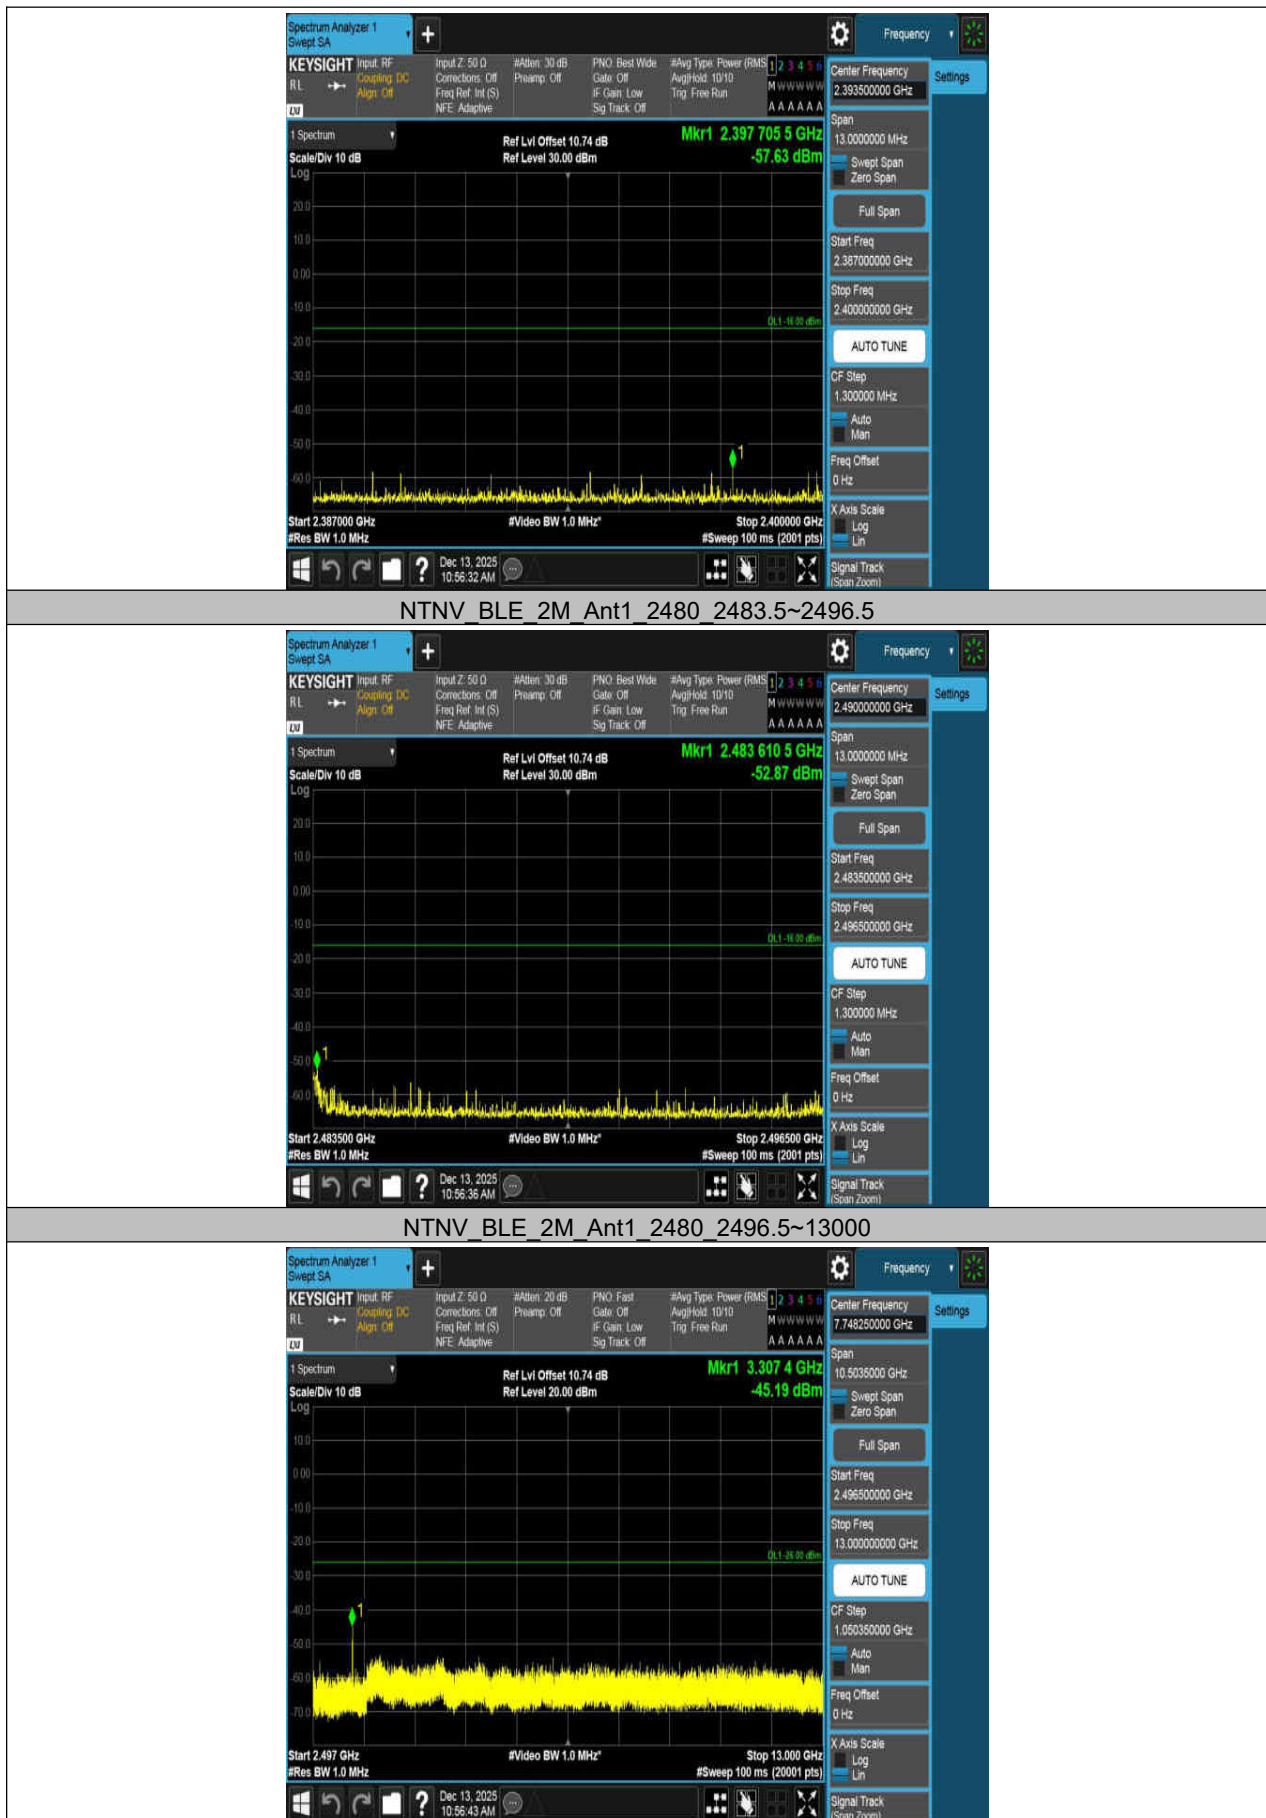


12. Secondary Radiated Emissions

12.1. Limit

The limit on secondary emissions radiated from the receiving equipment within which the function of other radio equipment will not be impaired shall be, in terms of the power of a dummy antenna circuit that has the same electrical constant as the receiving antenna, 4 nW or less at a frequency below 1 GHz and 20 nW or less at a frequency of 1 GHz or higher as measured using the circuit.

12.2. Block Diagram of Test Setup



12.3. Test Procedure

(1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Resolution BW: 100 kHz for frequency below 1 GHz and 1 MHz for frequency above 1 GHz

Video BW: 100 kHz for frequency below 1 GHz and 1MHz for frequency above 1 GHz

Detector: Peak.


Trace Mode: Max Hold.

(2) All the emissions from 30 MHz to 13 GHz were measured and record.

12.4. Test Result


Test Condition	Test Mode	Antenna	Freq (MHz)	Freq. Range (MHz)	Result (dBm)	Limit (dBm)	Result (nW)	Limit (nW)	Verdict
NTNV	BLE_1M	Ant1	2402	30~1000	-82.69	≤-54	0.00538	≤4	PASS
				1000~12500	-58.74	≤-47	1.33660	≤20	PASS
			2440	30~1000	-82.55	≤-54	0.00556	≤4	PASS
				1000~12500	-70.67	≤-47	0.08570	≤20	PASS
			2480	30~1000	-82.5	≤-54	0.00562	≤4	PASS
				1000~12500	-59.57	≤-47	1.10408	≤20	PASS
	BLE_2M	Ant1	2402	30~1000	-82.66	≤-54	0.00542	≤4	PASS
				1000~12500	-68.55	≤-47	0.13964	≤20	PASS
			2440	30~1000	-82.6	≤-54	0.00550	≤4	PASS
				1000~12500	-71.99	≤-47	0.06324	≤20	PASS
			2480	30~1000	-82.41	≤-54	0.00574	≤4	PASS
				1000~12500	-58.81	≤-47	1.31522	≤20	PASS

12.5. Original Test Data

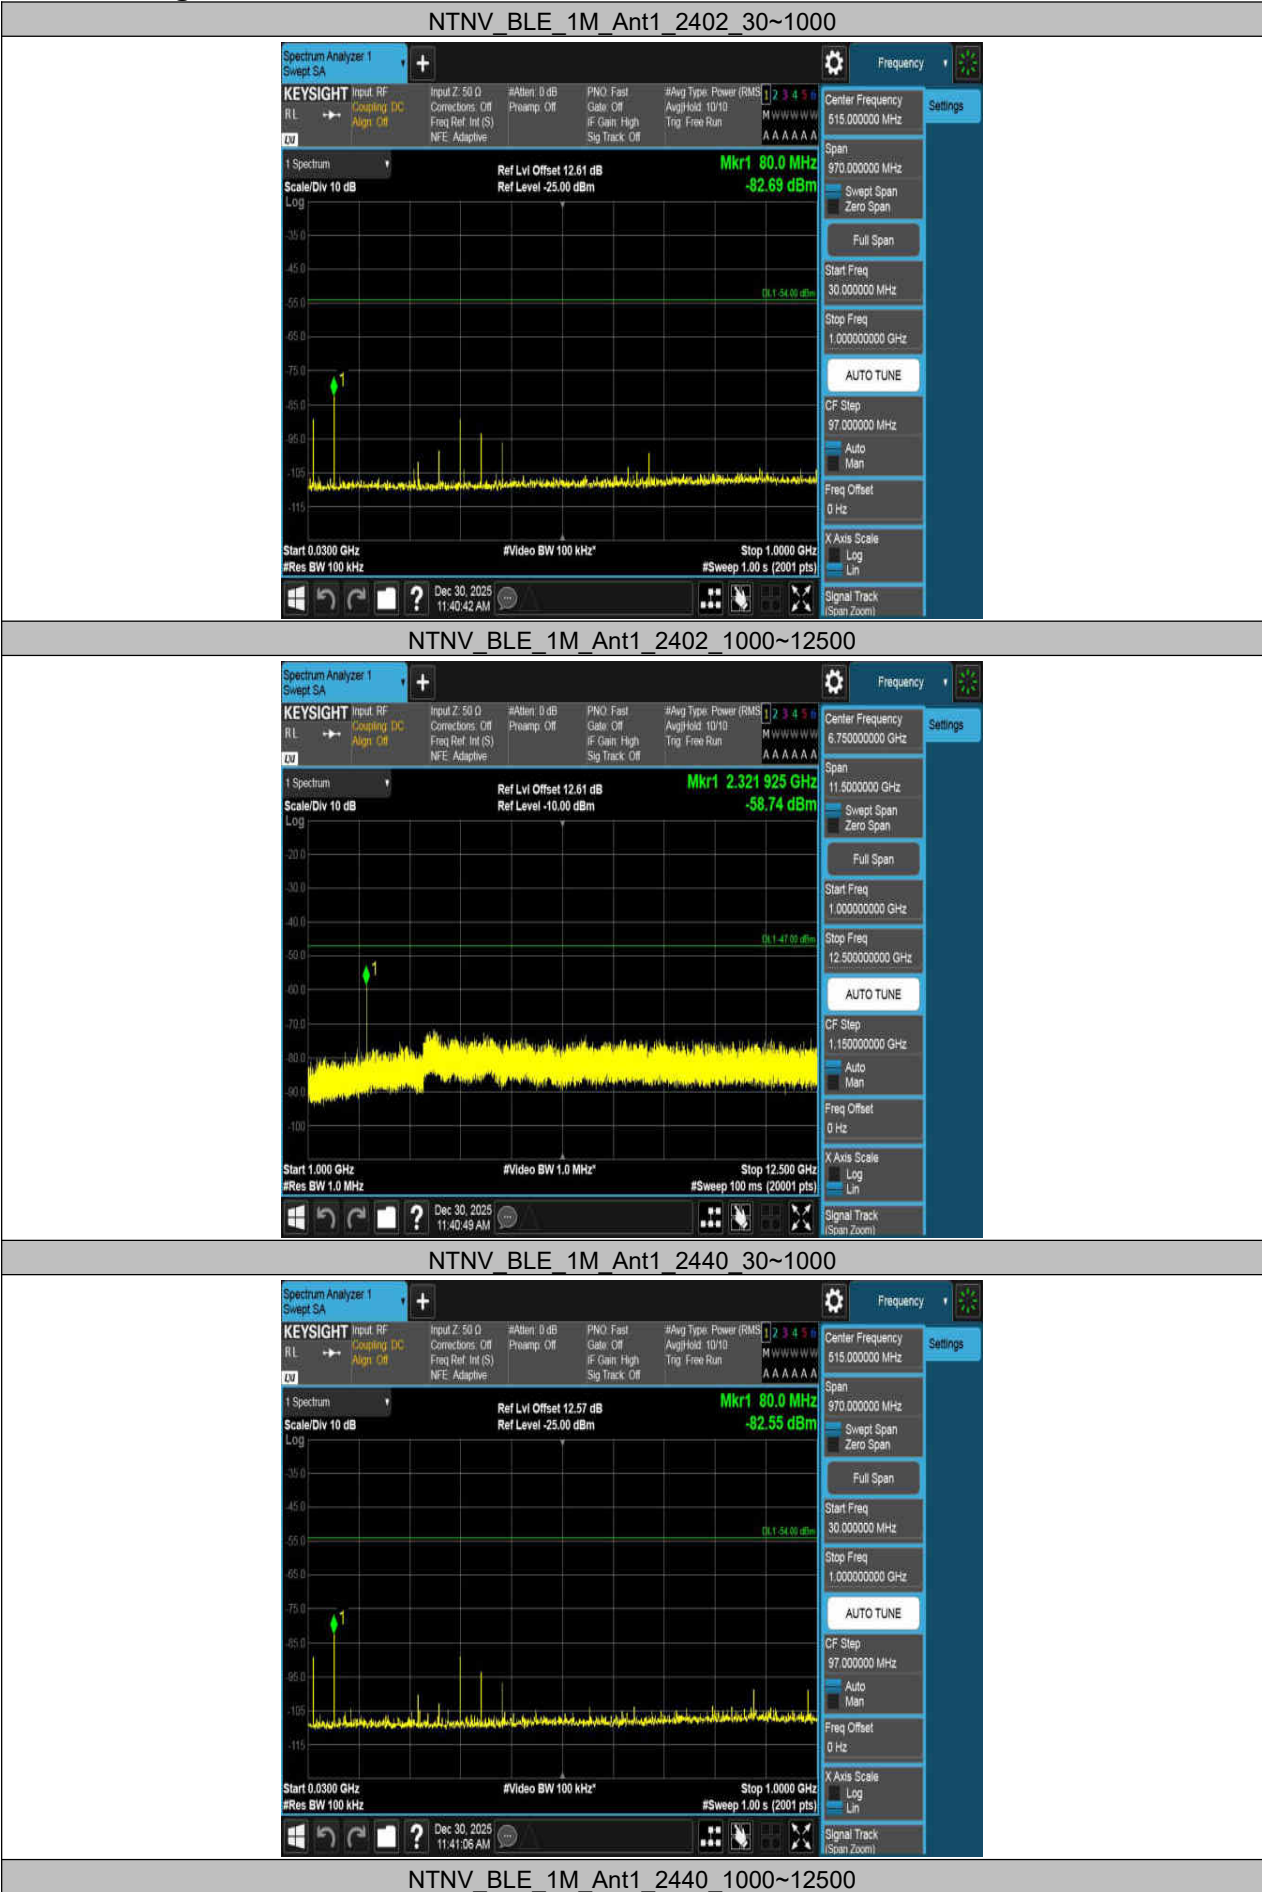




NTNV BLE 1M Ant1 2480 30~1000

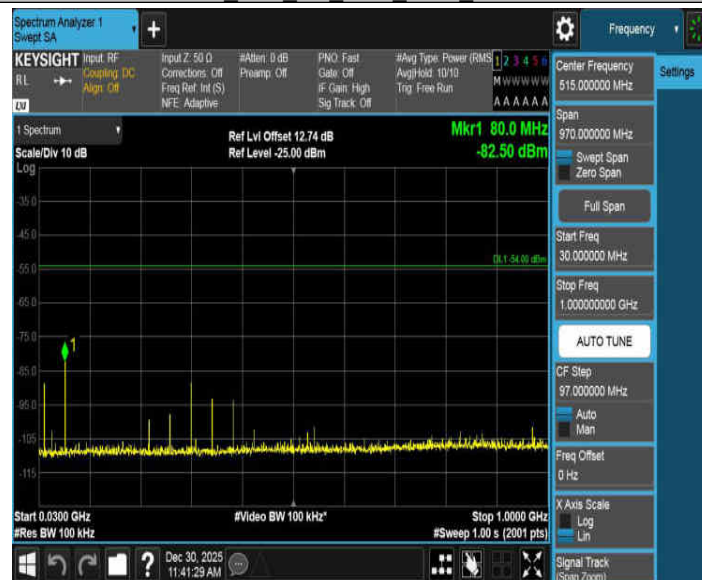

NTNV BLE 1M Ant1 2480 1000~12500



NTNV BLE 2M Ant1 2402 30~1000

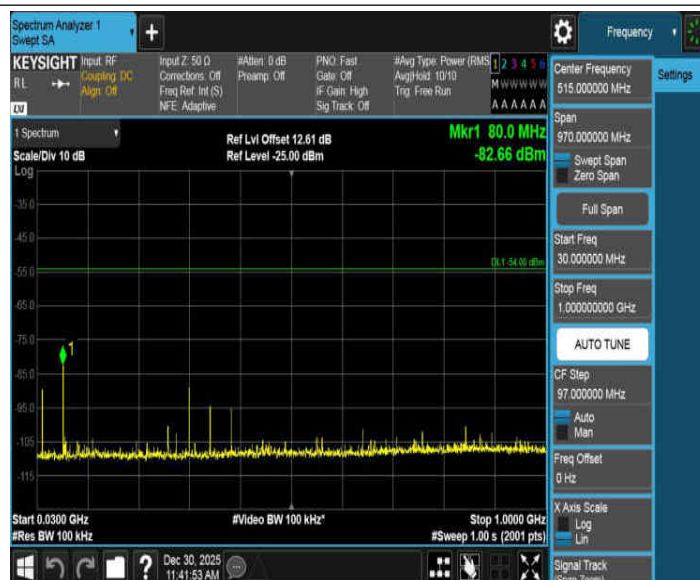

NTNV_BLE_2M_Ant1_2402_1000~12500



NTNV_BLE_2M_Ant1_2440_30~1000



NTNV_BLE_2M_Ant1_2440_1000~12500



NTNV_BLE_2M_Ant1_2480_30~1000




NTNV_BLE_2M_Ant1_2480_1000~12500



13. Interference Prevention Function

13.1. Measurement System Diagram

(1) When transmitting identification code



(2) Condition of measuring instrument

Demodulator must be able to demodulate the transmitting signal emitted by test equipment and to indicate the identification code.


(3) Condition of test equipment the mode of normal use.

13.2. Measuring Operation Procedure

When test equipment has the function to transmit identification code automatically:

(A) Transmit the predetermined identification code from test equipment.

(B) Confirm the transmitted identification code by demodulator.



13.3. Test Result

Test result: The unit does meet the requirements.

PASS

Report End