〈 Ass'y 〉





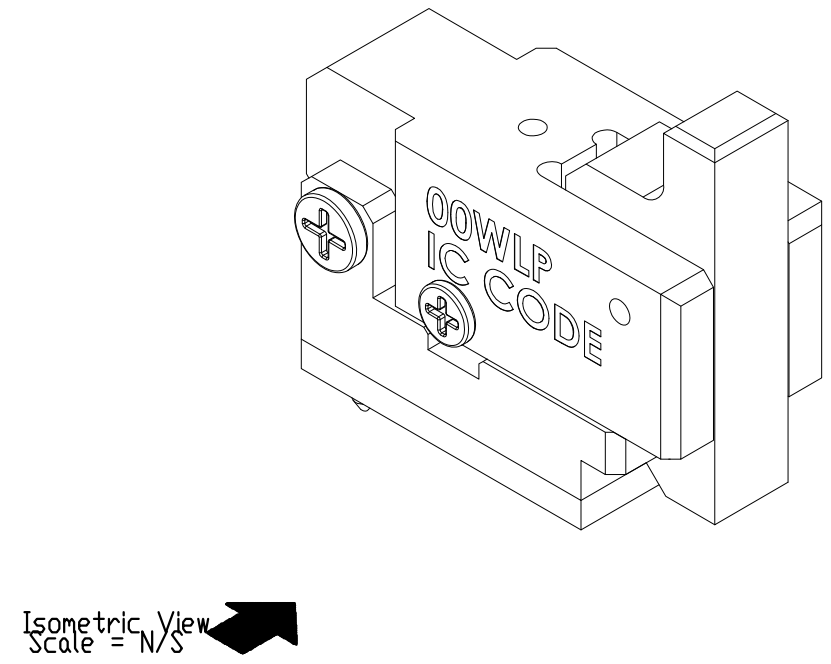

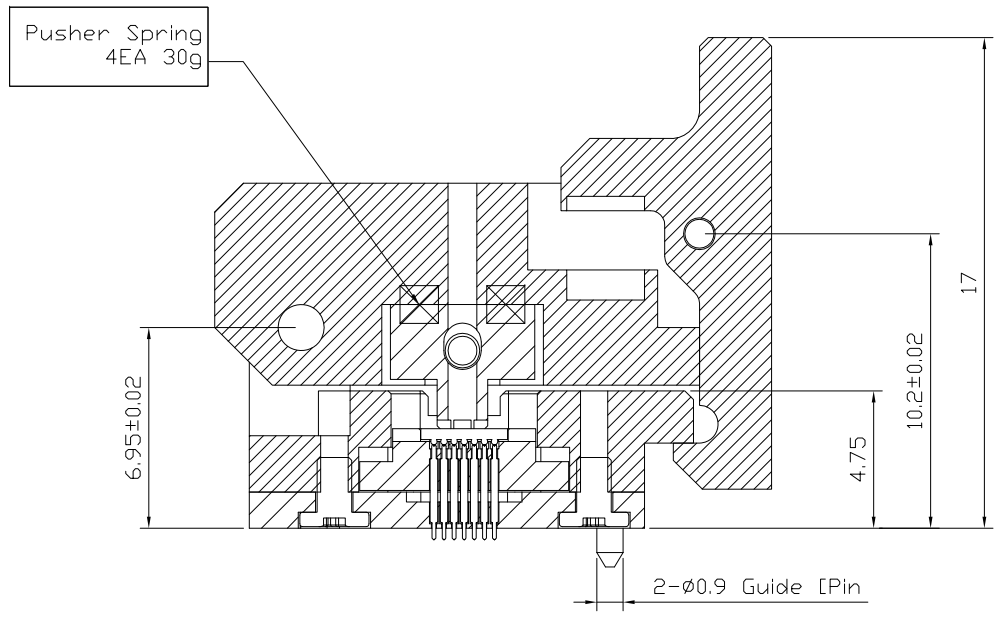

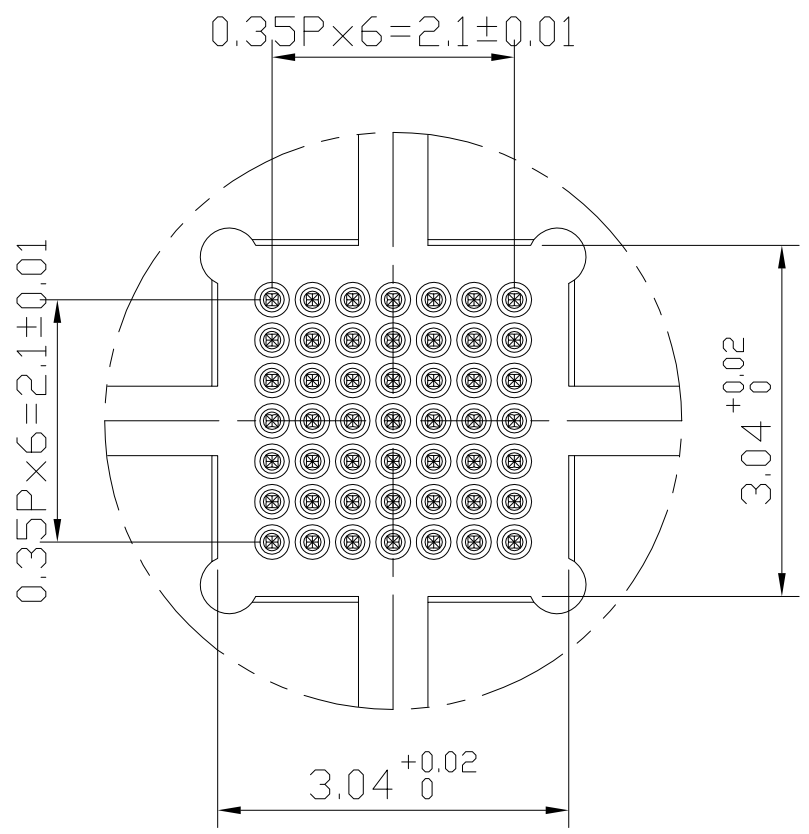

Detail "Q" (4:1)

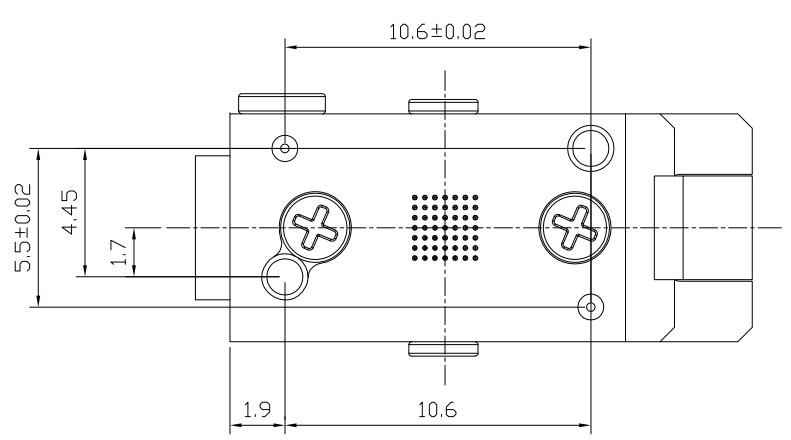

〈 Device Package 〉

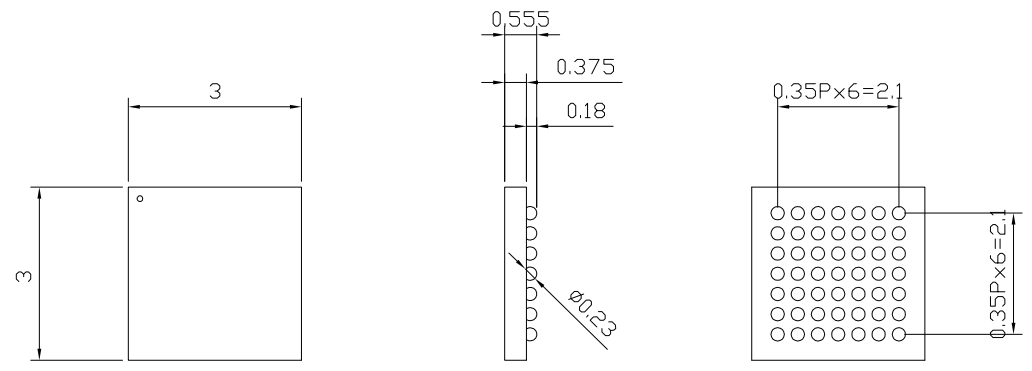

Detail (2:1)

〈 Probe Pin SPEC 〉



Detail (5:1)

MODEL : IVB-SAR-330-026-A088-00
RECOMMENDED TRAVEL : 0.40mm
FULL STROKE : 0.5mm
SPRING FORCE : 22g @ 0.40mm

			MATERIAL				Quantity	INNOVO
			SURFACE TREATMENT				–	
			Third Angle	Std.Tol. ±0.05	Unit mm	Scale NS	Project No.	IVS-00WLP-Z999-99(IC Code)(TINY)
			Designed	Checked	Approved		Part No.	–
0	2023.02.07	Initial Release	BS CHOI	SH KIM	SB CHUNG		Part name	SOCKET ASS'Y
Rev.	Date	Description	2023.02.07	2023.02.07	2023.02.07		Description	

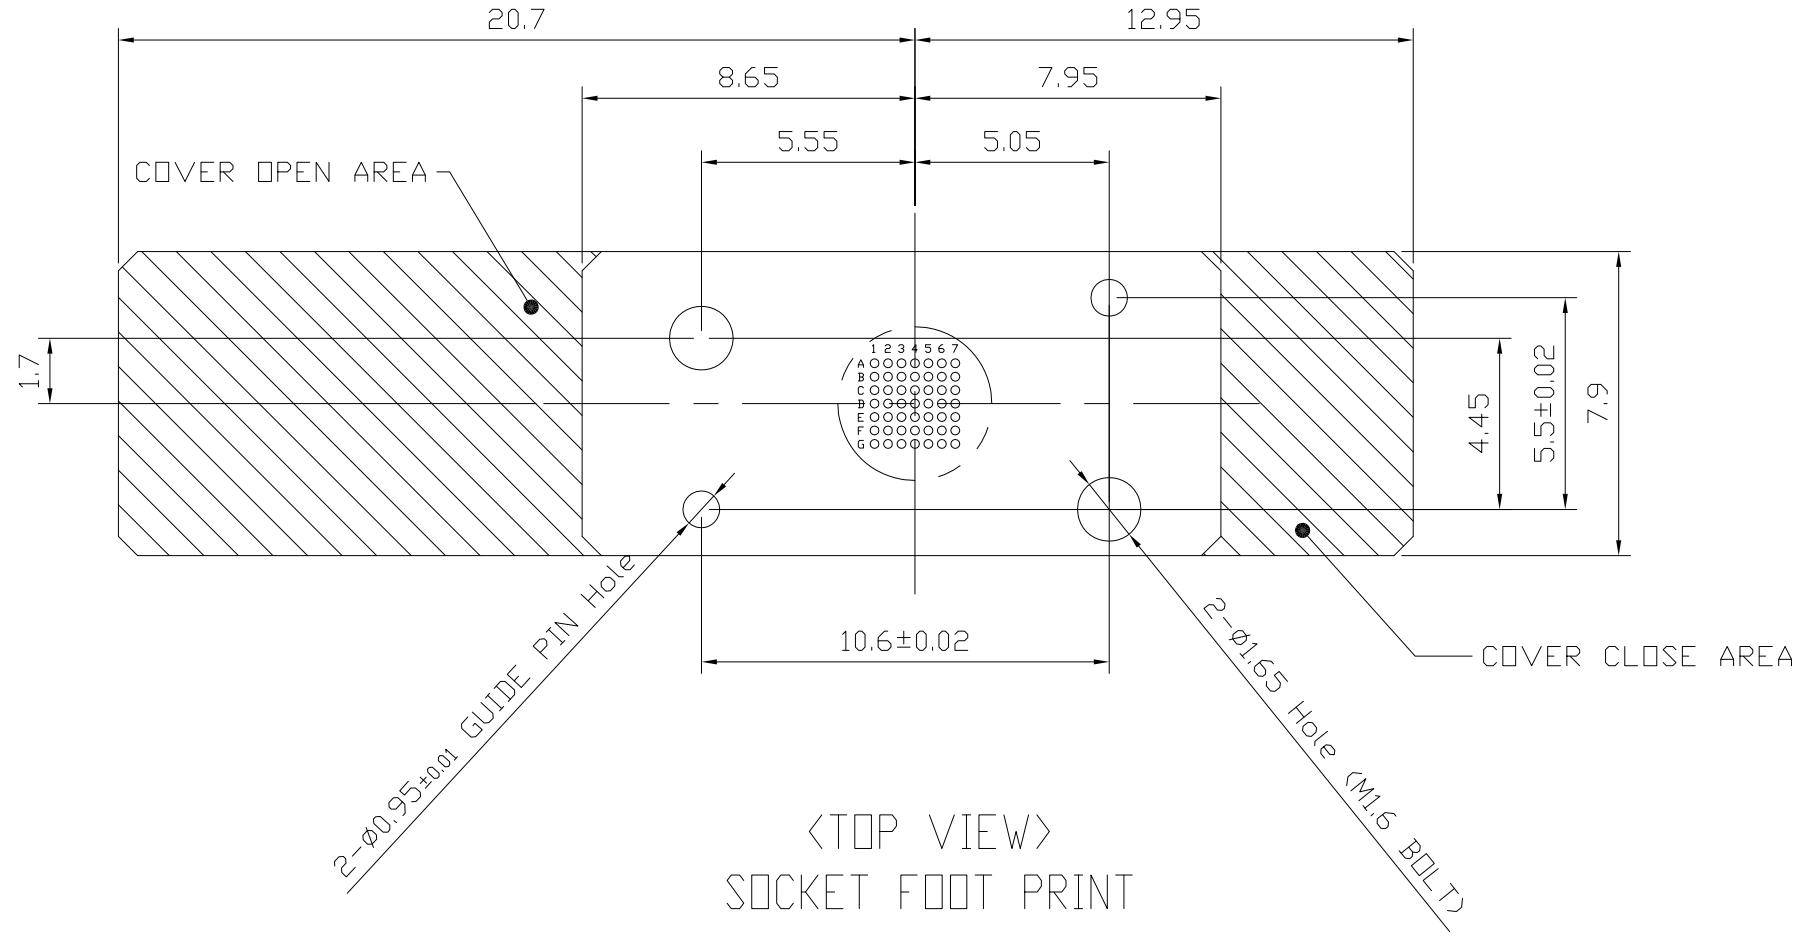

<TOP VIEW>
SOCKET FOOT PRINT

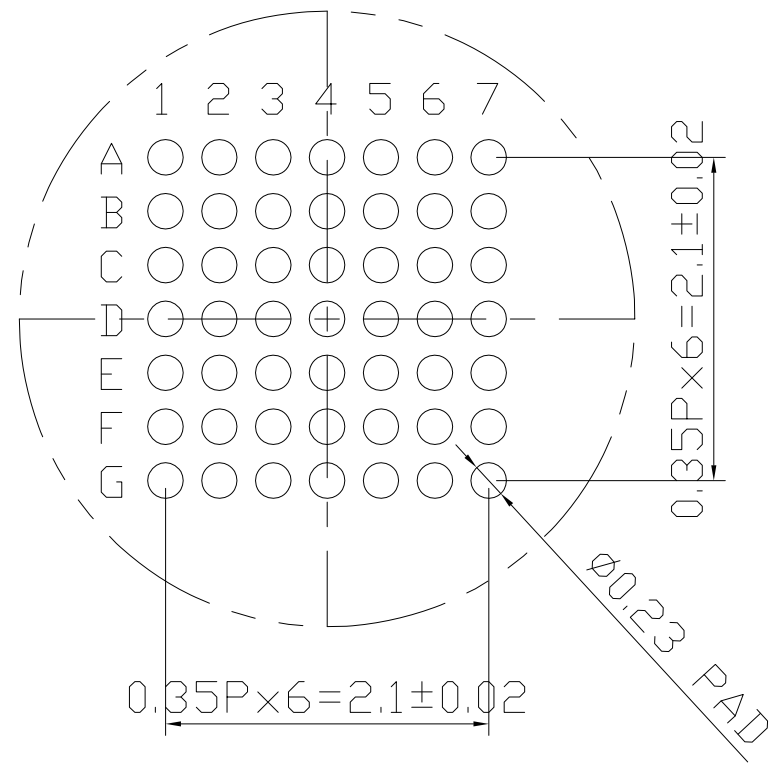

DETAIL 4:1

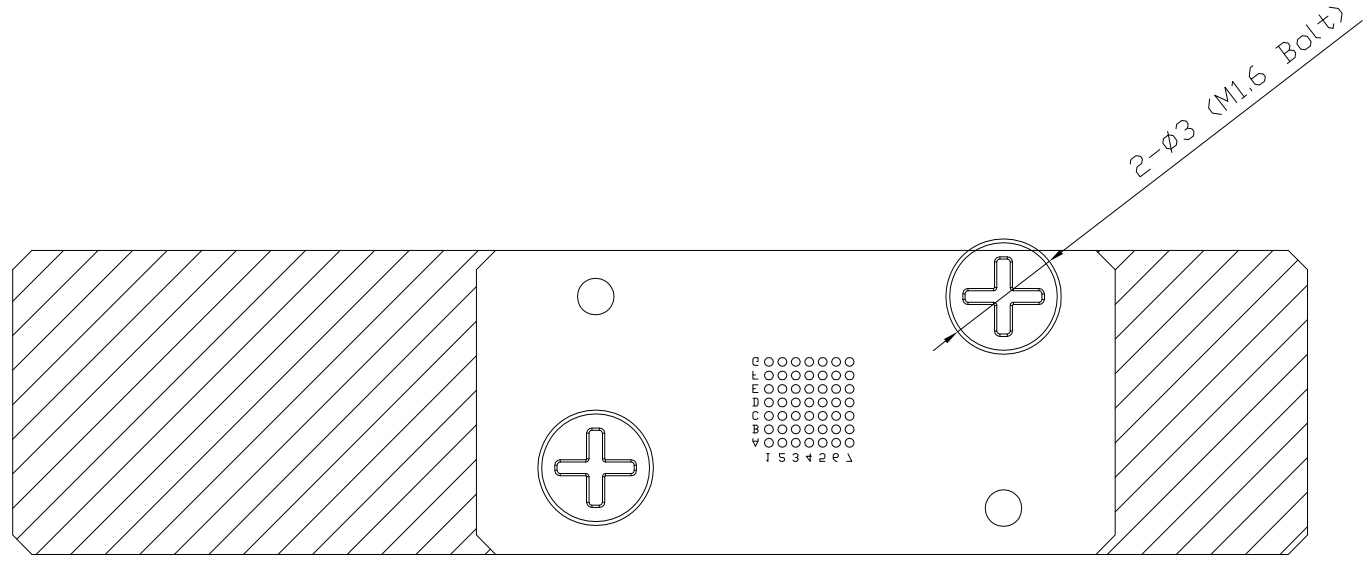

<BOTTOM VIEW>
SOCKET FOOT PRINT

			MATERIAL			Quantity	INNOVO
			SURFACE TREATMENT			–	
			Third Angle	Std.Tol. ±0.05	Unit mm	Scale NS	Project No. IVS-00WLP-Z999-99(IC Code)(TINY)
			Designed	Checked	Approved		Part No. –
0	2023.02.07	Initial Release	BS CHOI	SH KIM	SB CHUNG		Part name FOOT PRINT
Rev.	Date	Description	2023.02.07	2023.02.07	2023.02.07		Description

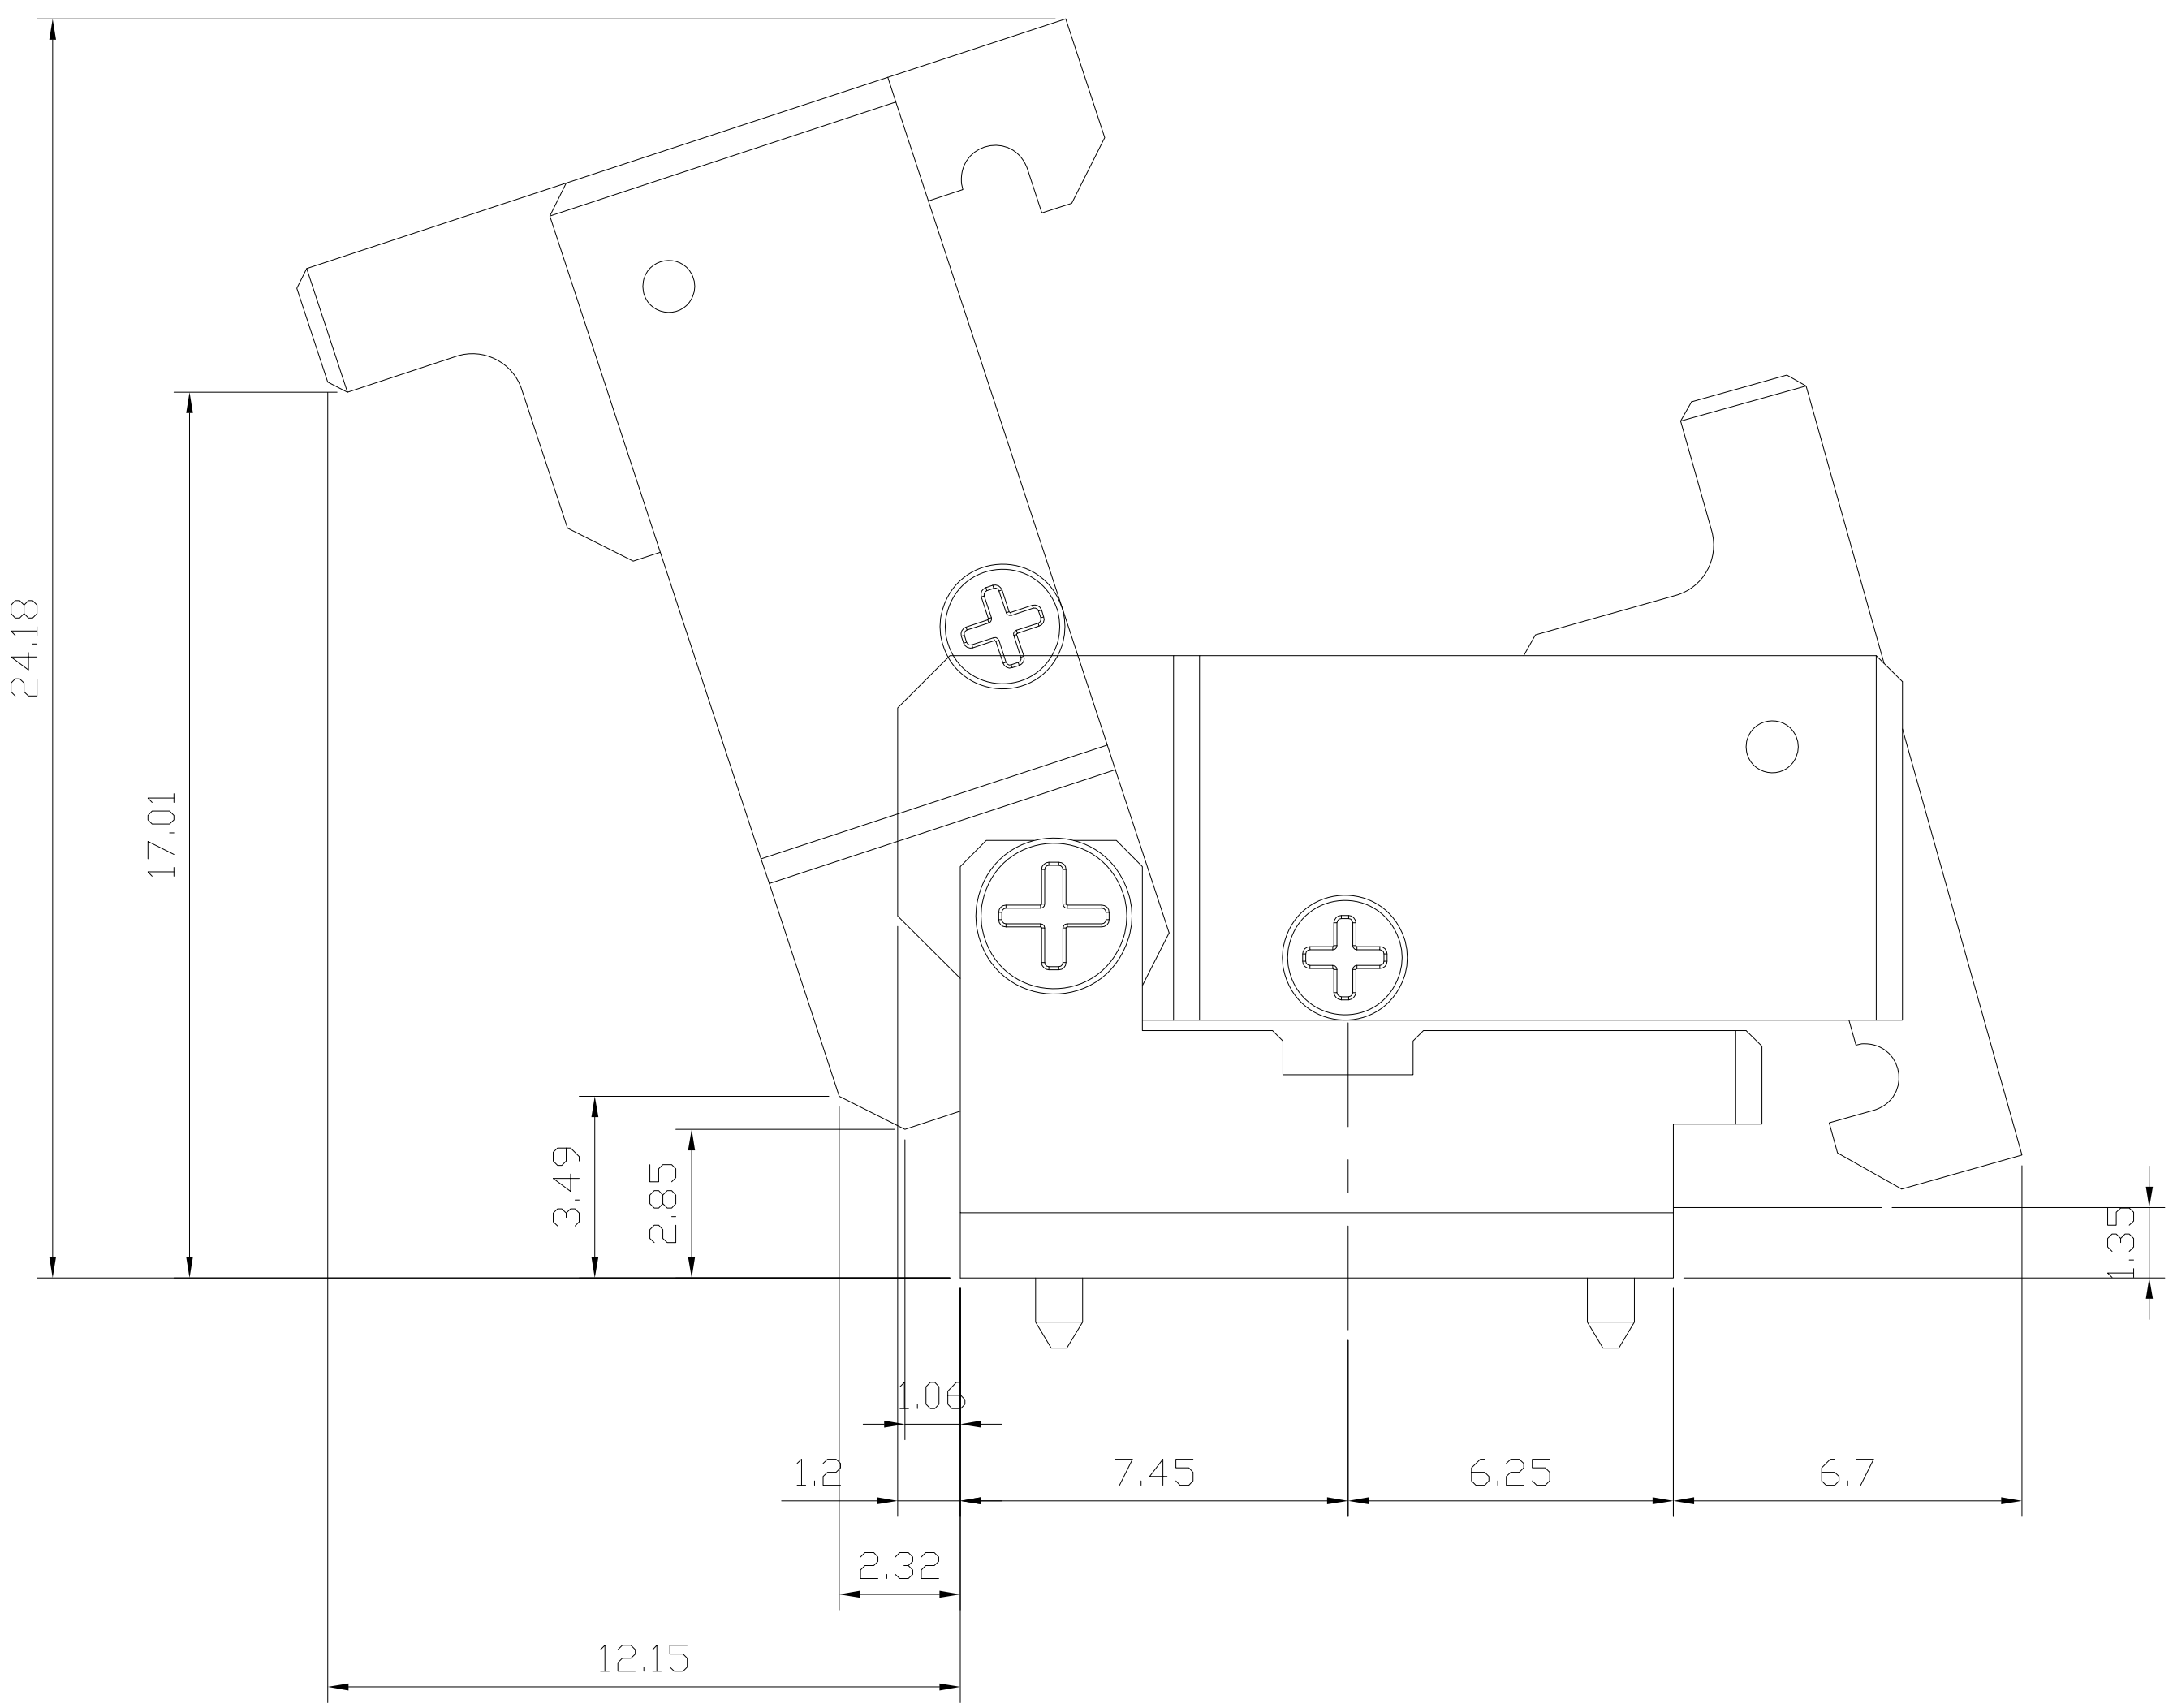

			MATERIAL			Quantity	INNOVO
			SURFACE TREATMENT			–	
			Third Angle	Std.Tol.	Unit	Scale	
				±0.05	mm	NS	Project No.
			Designed	Checked	Approved		Part No.
0		Initial Release					Part name
Rev.	Date	Description					Description

※ 3D VIEW

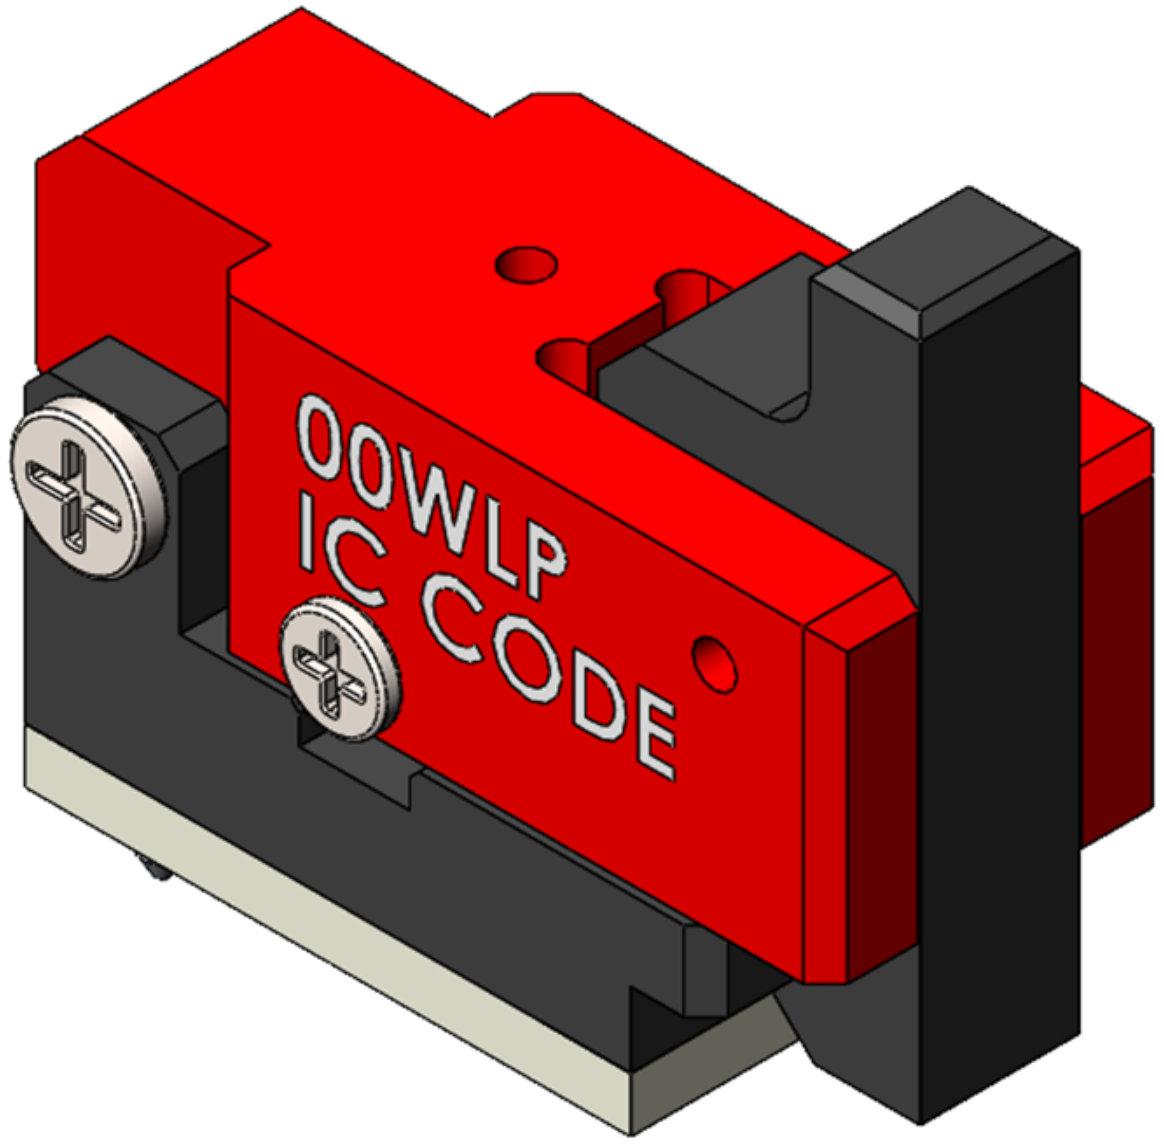

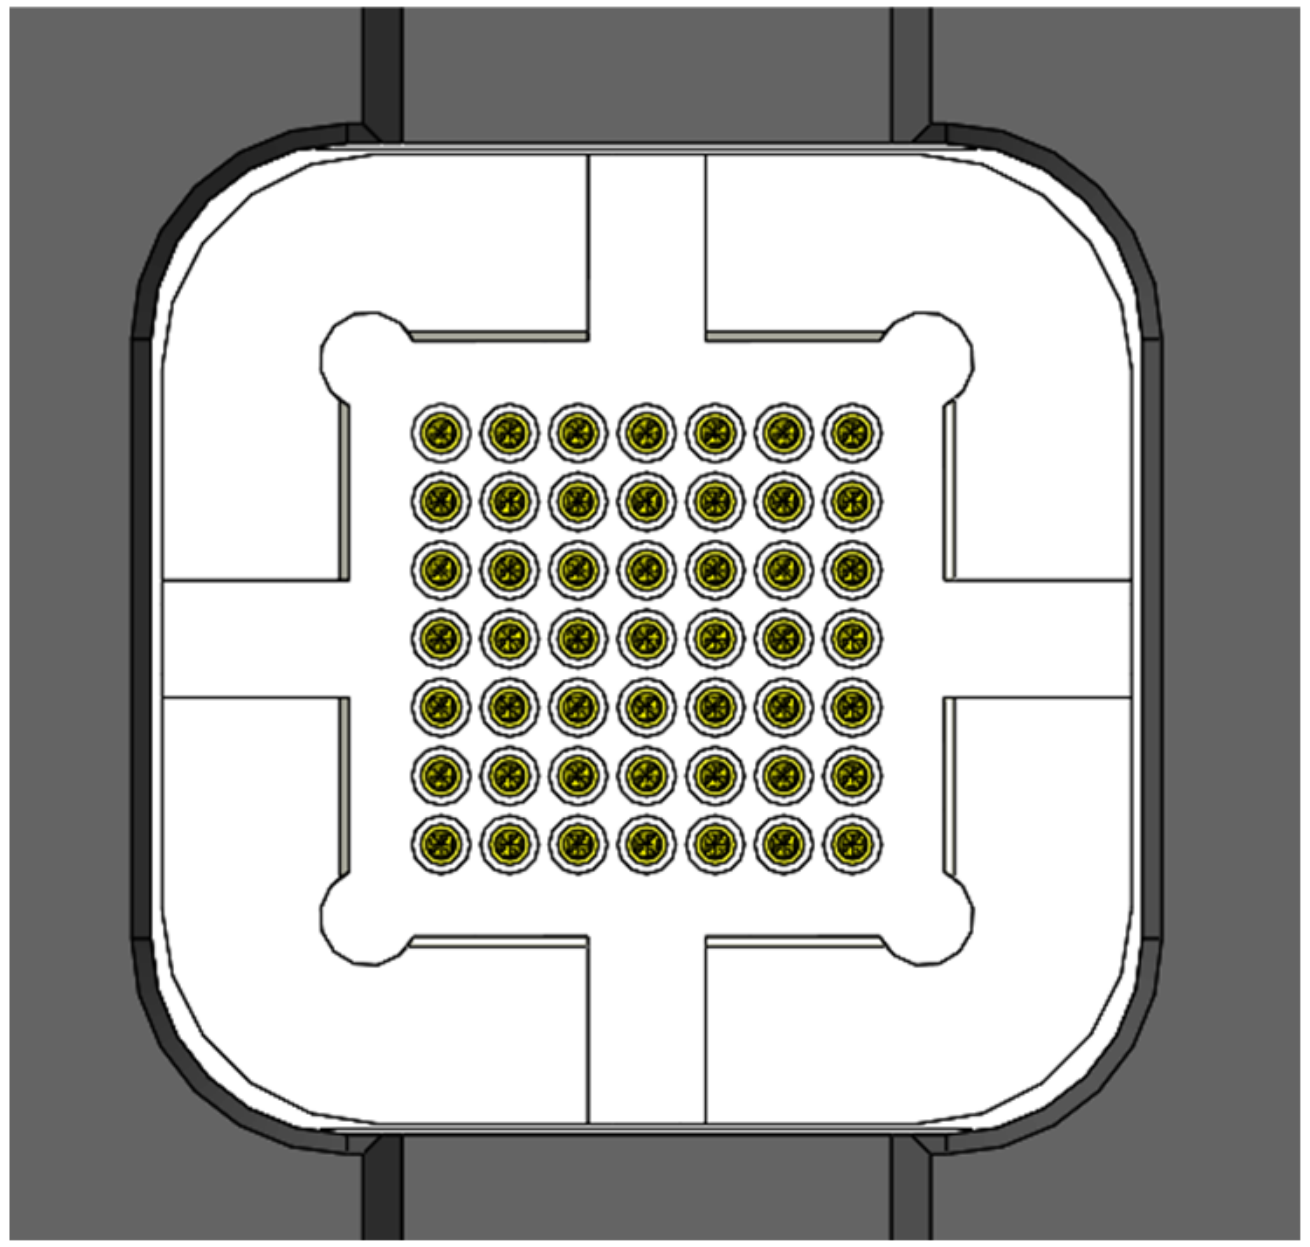

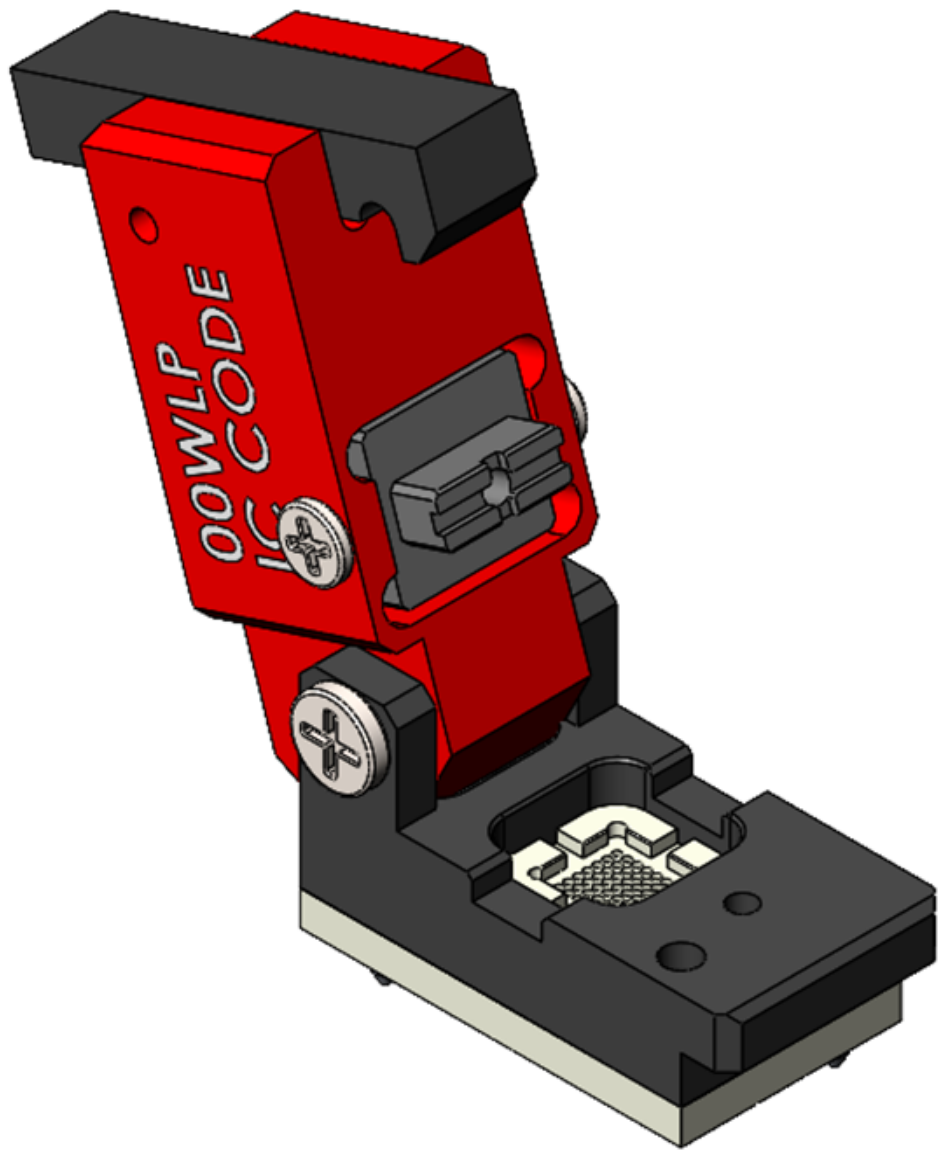

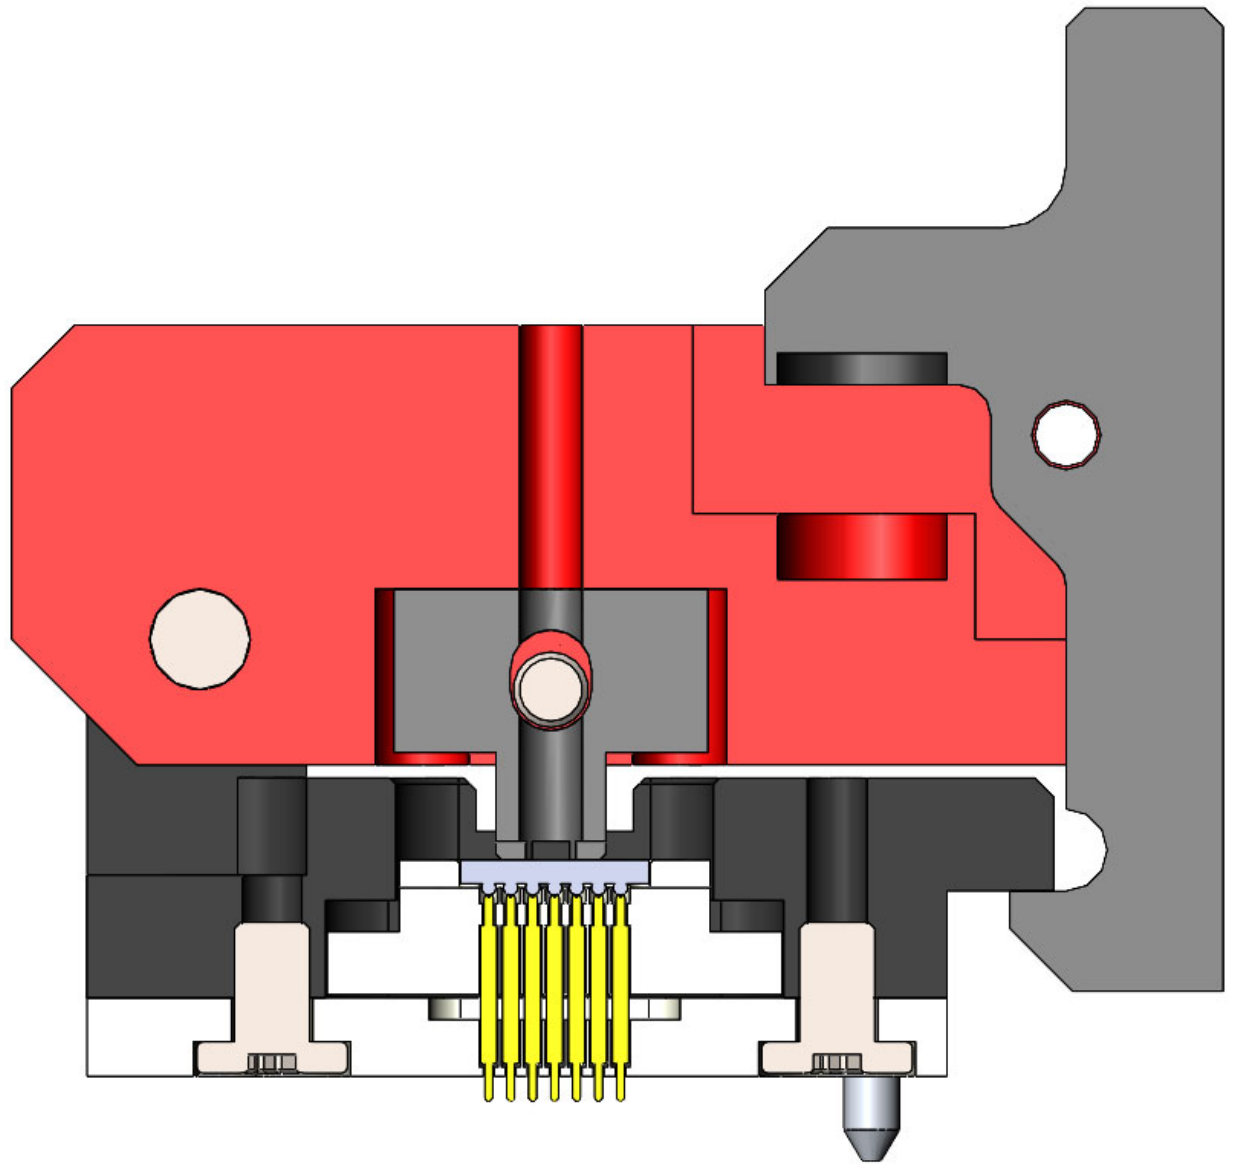

※Socket assembly guide

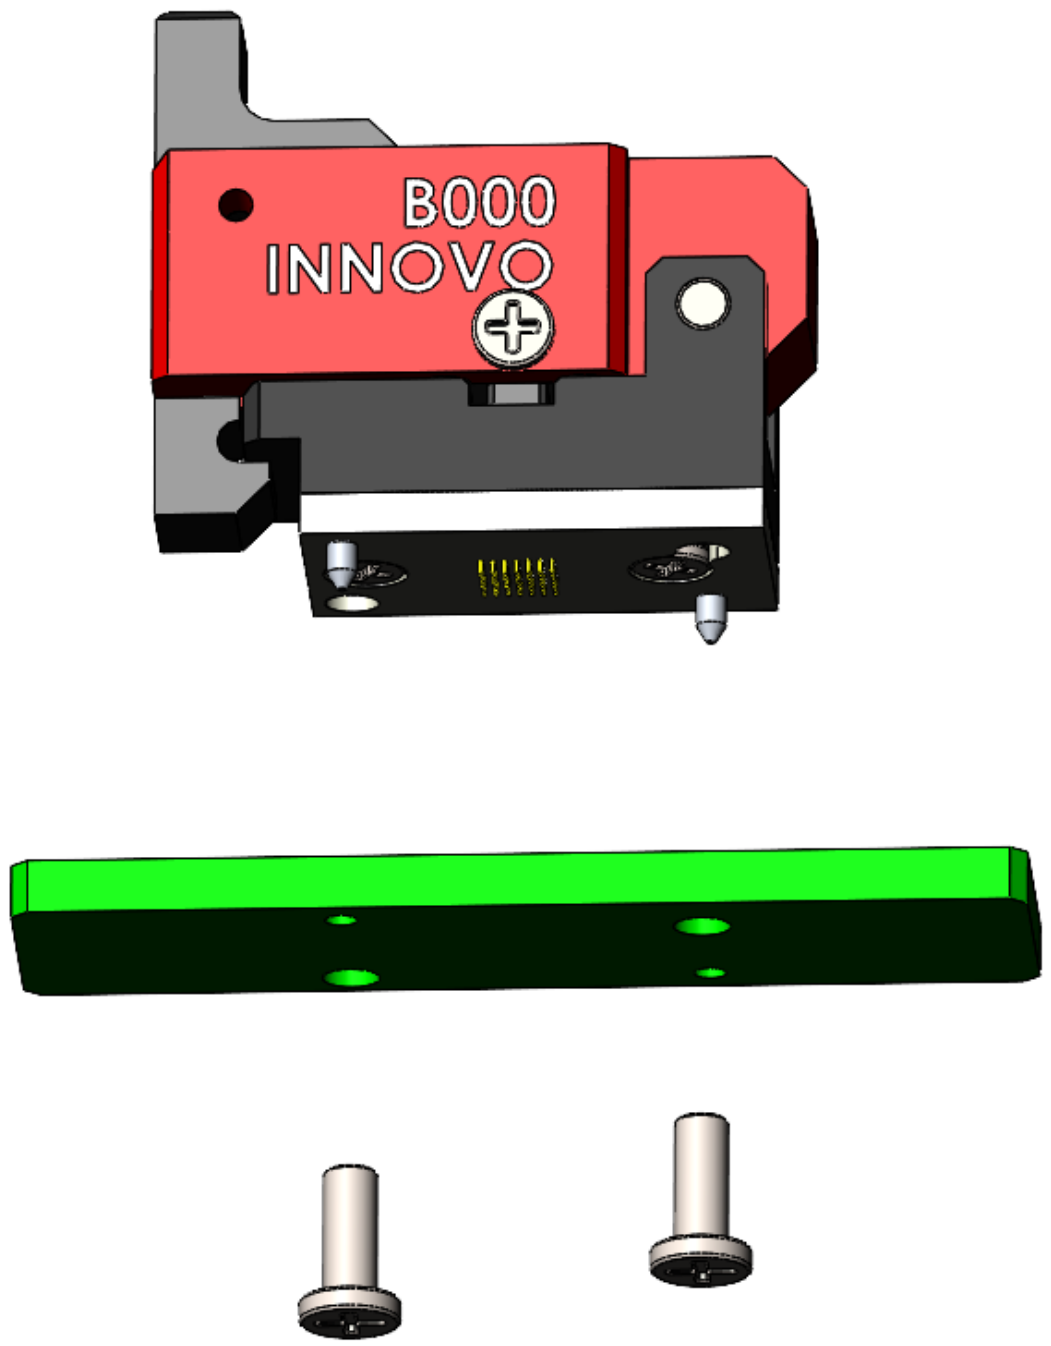

Step 01

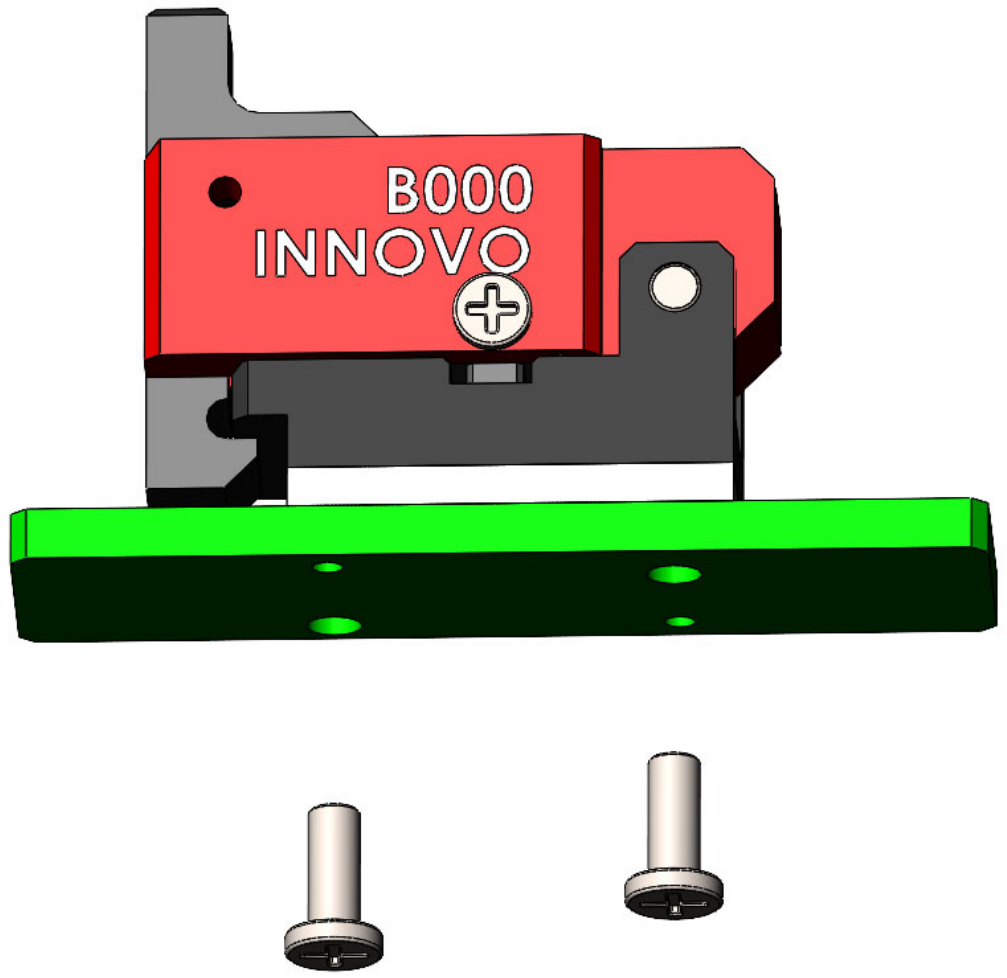

Step 02

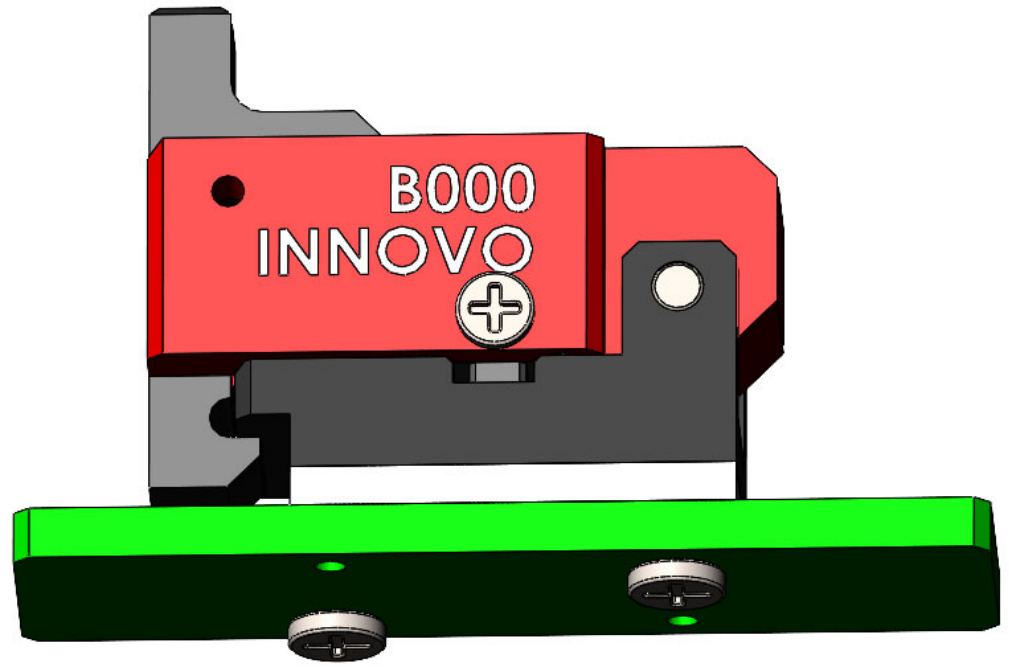

Step 03