


※ General POGO pin – 2.2mm / 0.35P

IVB-SAR-220-025-A079-00

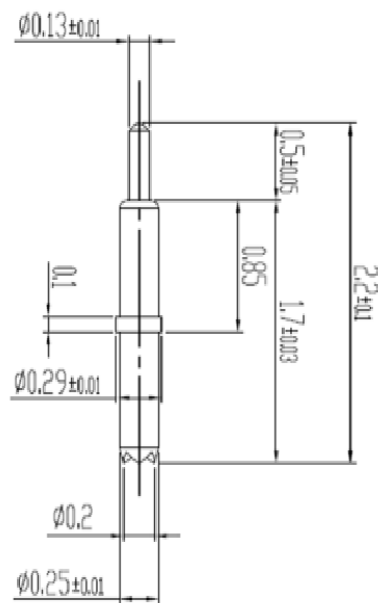

Pitch	0.35mm
Total Length	3.3mm
Use Length	2.9mm
Use Stroke	0.4mm
Recommended Top Plunger Stroke	0.3mm
Recommended Bottom Plunger Stroke (Pre-load)	0.1mm
Max Stroke	0.5mm
Spring Force at Use Stroke	18gf at 0.4mm Stroke
Operating Temperature	-40 to 120°C
DC Resistance	Avg. 40.0mΩ at 0.4mm stroke
Current Rating	1.0A (Continuous)
Self Inductance	0.89 nH
Bandwidth @ -1dB	21.3 GHz
Top Plunger	BeCu / Au over Ni
Bottom Plunger	BeCu / Au over Ni
Barrel	PBT / Au over Ni
Spring	Music wire / Au
Insertion Life	100,000 cycles at 0.4mm Stroke