




*Innovative test solution
Provider*




※ POGO type – 0.35 pitch

IVB-SAR-330-026-A088-00

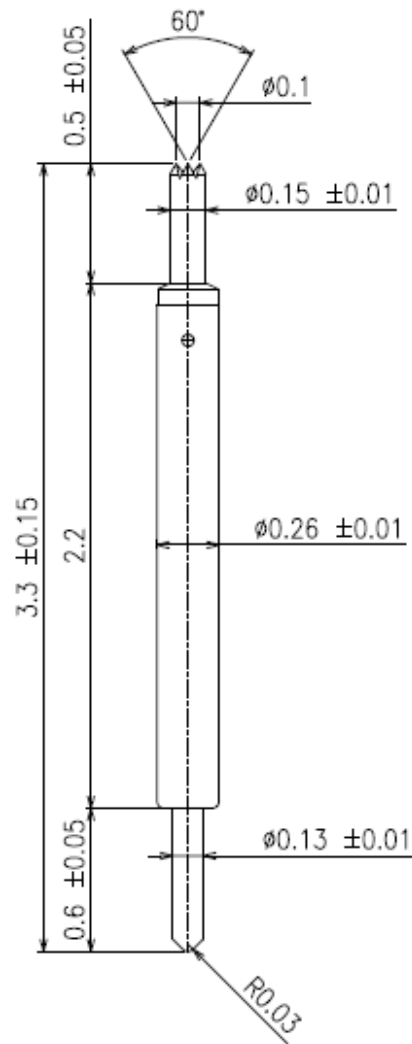

Pitch	0.35mm
Total Length	3.3mm
Use Length	2.9mm
Use Stroke	0.4mm
Recommended Top Plunger Stroke	0.15mm
Recommended Bottom Plunger Stroke (Pre-load)	0.25mm
Max Stroke	0.5mm
Spring Force at Use Stroke	22gf at 0.4mm Stroke
Operating Temperature	-40 to 150°C
DC Resistance	Avg. 68.50mΩ at 0.4mm stroke
Current Rating	1.0A
Self Inductance @10GHz	0.962 nH
Capacitance @10GHz	0.197 pF
Top Plunger	BeCu / Au over Ni
Bottom Plunger	BeCu / Au over Ni
Barrel	Phosphor bronze / Au over Ni
Spring	Music Wire / Au over Ni
Insertion Life	100,000 cycles at 0.4mm Stroke

※ POGO type – 0.35 pitch

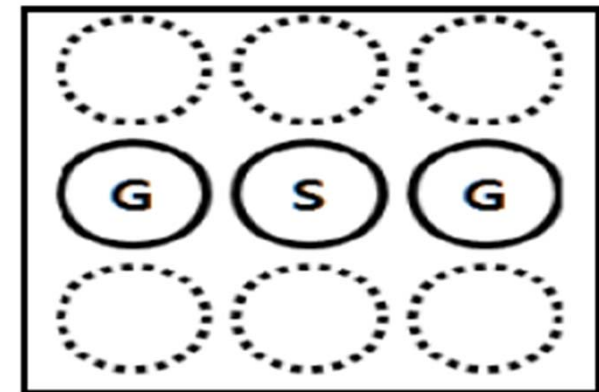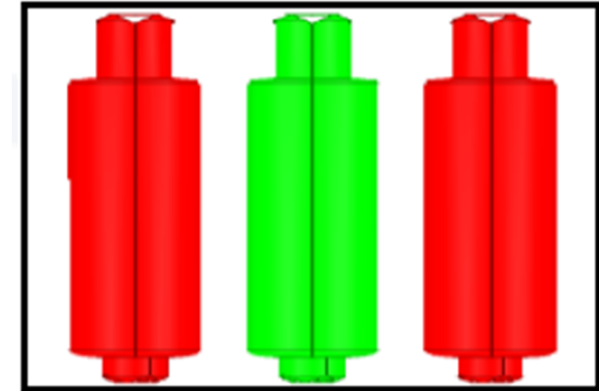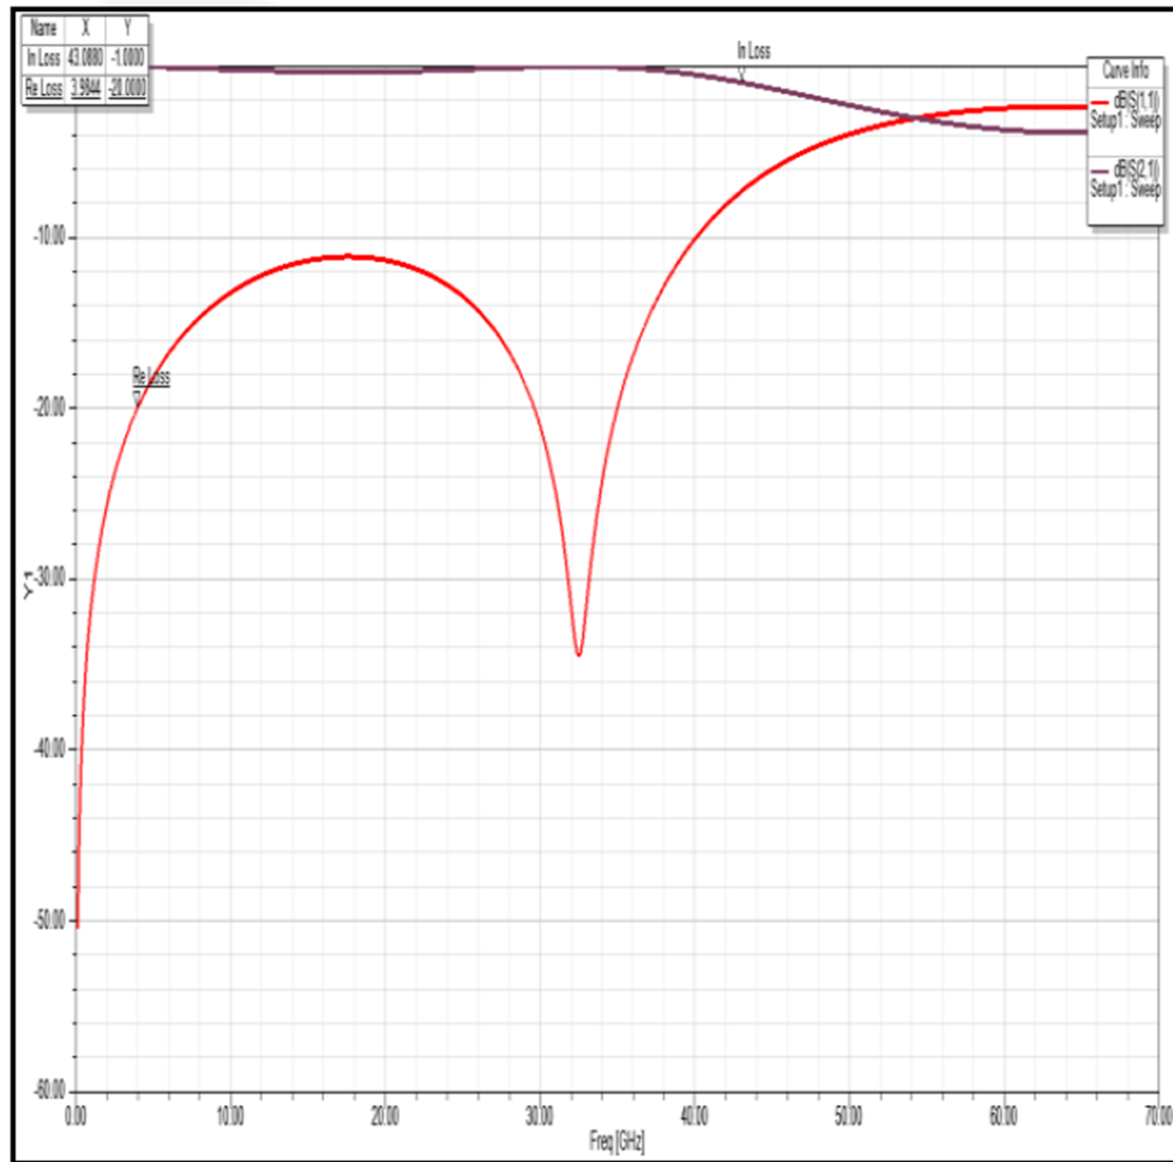

Thank you.