

POGO pin for High current

Mechanical Infomaton


Pitch	0.4 mm
Total Length	3.6 mm
Use Length	3.3 mm
Use Stroke	0.3 mm
Max. Stroke	0.5 mm
Spring Force	20 gf
Temperature	-40~200℃

Electrical Infomaton

DC Resistance	Avg. 36.8 mΩ
Current Rating (Continuous)	4.7 A
Current Rating (Duty cycle 30%)	5.5 A
Self Inductance	0.98 nH
Bandwidth @ -1dB	27.04 GHz
Capacitance	0.8 pF


Material and Alloy

Top Plunger	BeCu / Pd
Bottom Plunger	BeCu / Au
Barrel	Pb / Au
Spring	SUS / Au
Insertion Life	200K

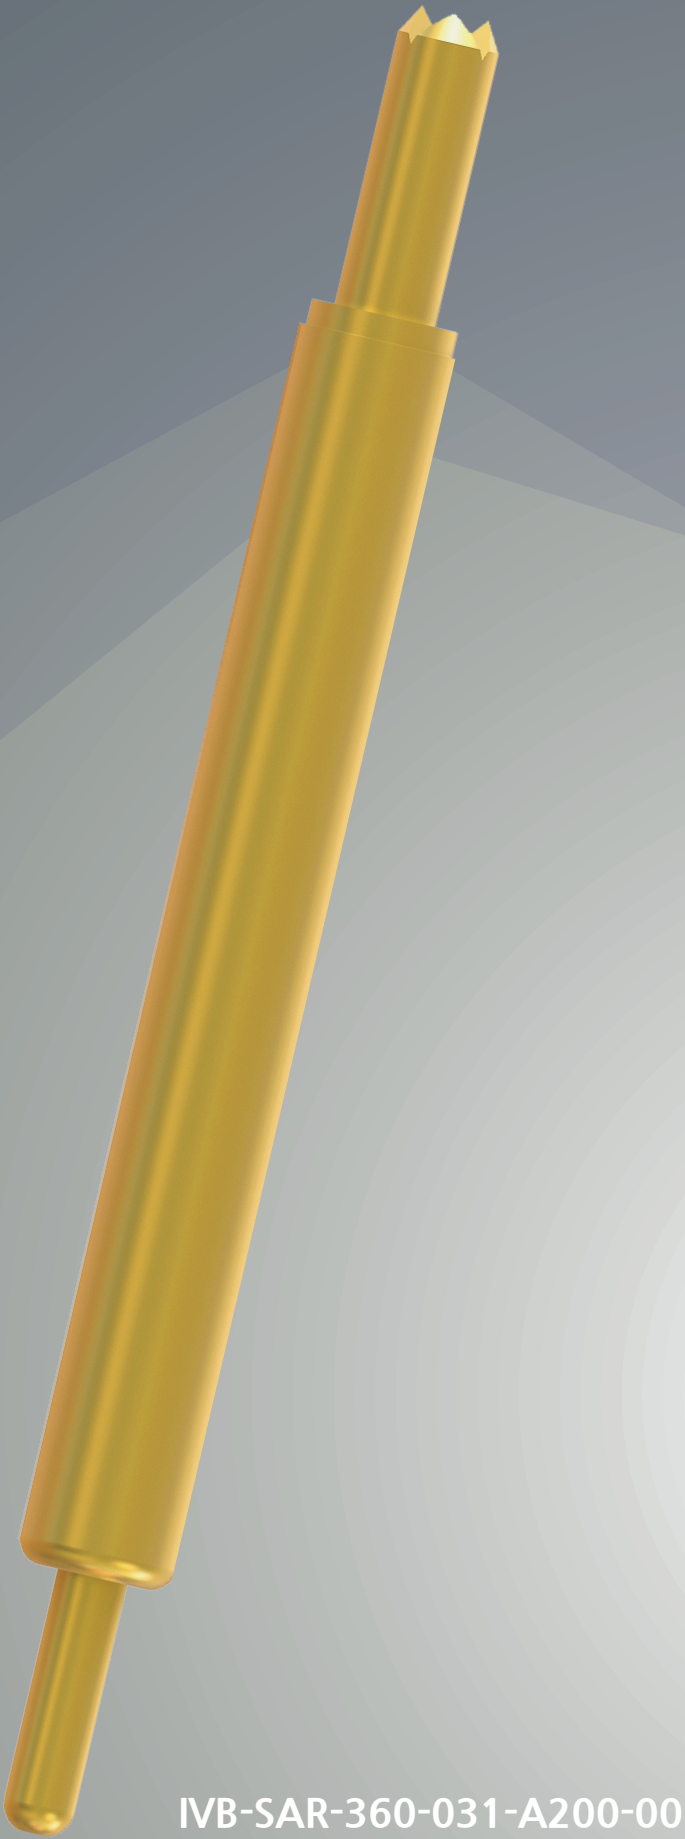


IVB-SAR-360-031-A200-00

S21

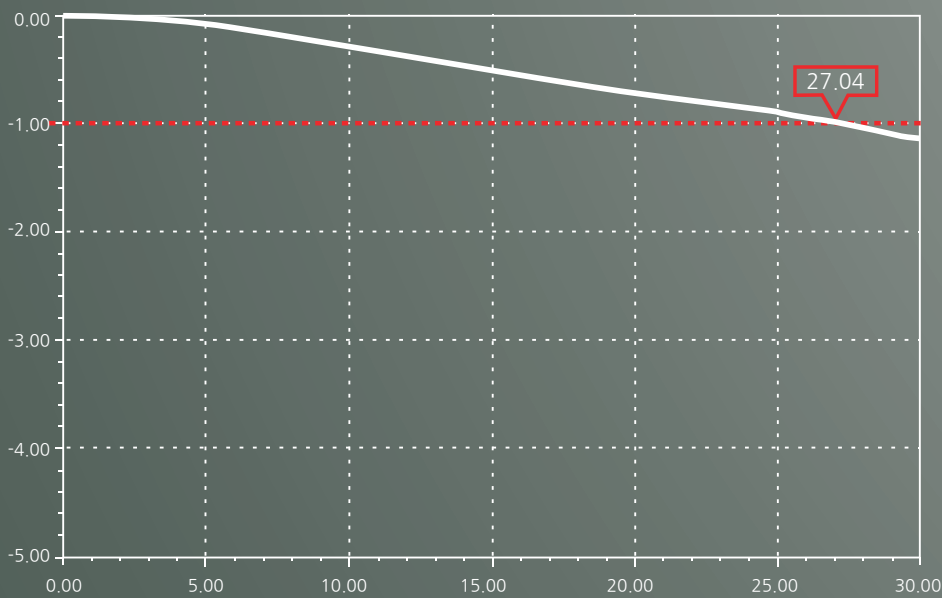

S11

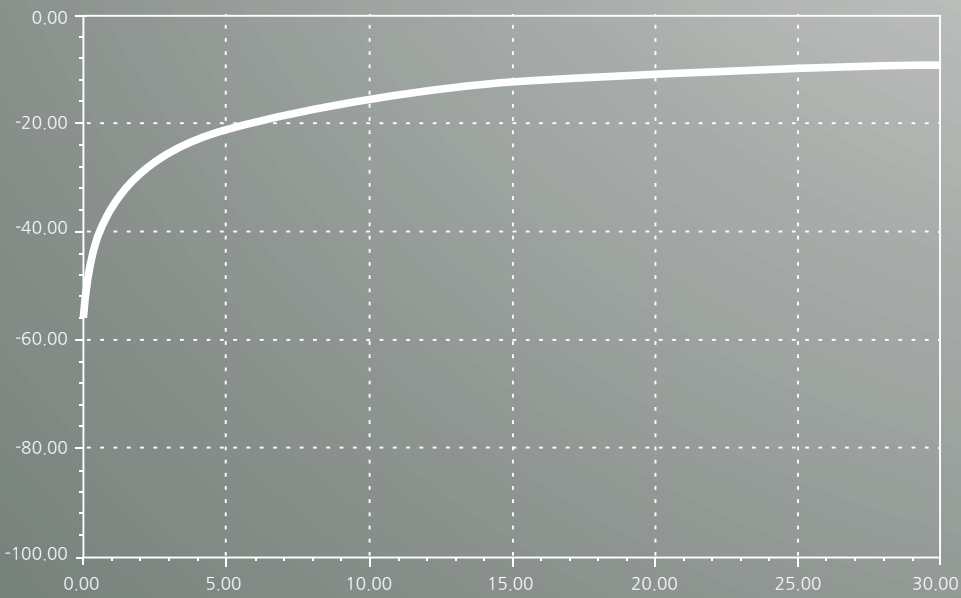

InnovoSoluton Co., Ltd.


Innovative Test Solution Provider

12, Galmachi-ro 203beon-gil, Jungwon-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
Tel : 031-735-6141 Fax : 031-735-6145 Email : sbchung@innovotech.co.kr




Comparison Table (Previous VS New POGO)

Previous POGO

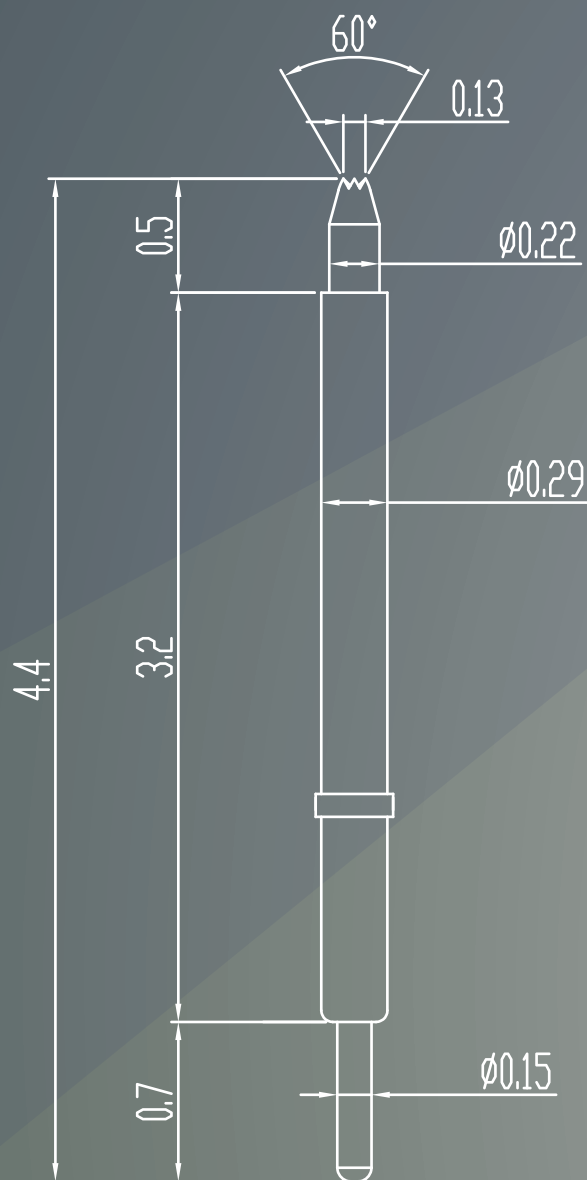

New POGO

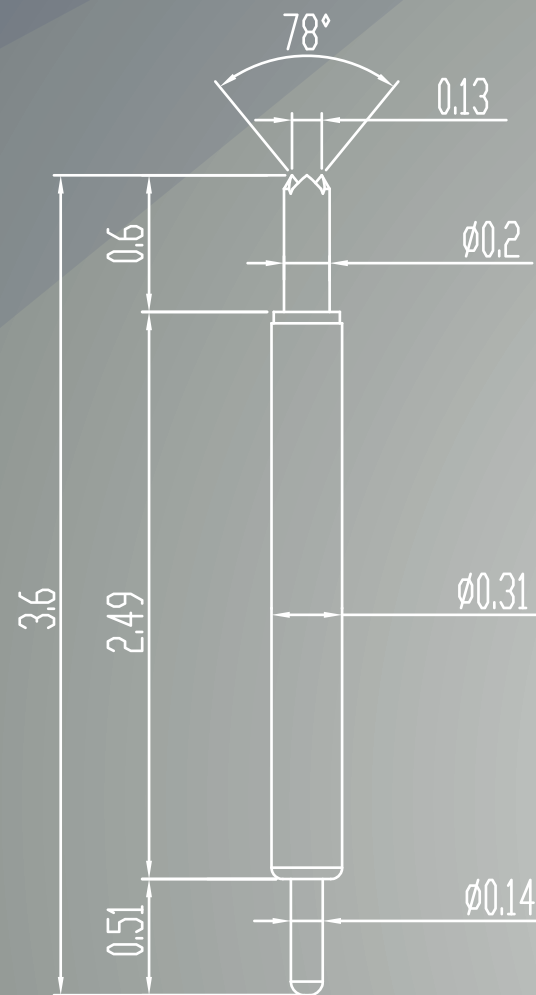

Pitch	Previous POGO	New POGO
POGO name	IVB-SAR-440-029-A003-00	IVB-SAR-360-031-A200-00
Total Length	4.4 mm	3.6 mm
Force	27 gf	20 gf
Temperature	-40 to 125°C	-40 to +200 °C
DC Resistance	68.50 mΩ	36.8 mΩ
Current Rating	1.0 A	4.7 A
Self Inductance	1.32 nH	0.98 nH
Bandwidth @ -1dB	18.7 GHz	27.04 GHz
Top Plunger	BeCu / Au	BeCu / Pd
Bottom Plunger	BeCu / Au	BeCu / Au
Barrel	Pb / Au	Pb/ Au
Spring	MW / Au	SUS/ Au
Insertion Life	100,000	200,000

InnovoSolution Co., Ltd.

Innovative Test Solution Provider

12, Galmachi-ro 203beon-gil, Jungwon-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
Tel : 031-735-6141 Fax : 031-735-6145 Email : sbchung@innovotech.co.kr

