




*Innovative test solution
Provider*

※ Special – POGO pin for High current

IVB-SAR-360-031-A200-00

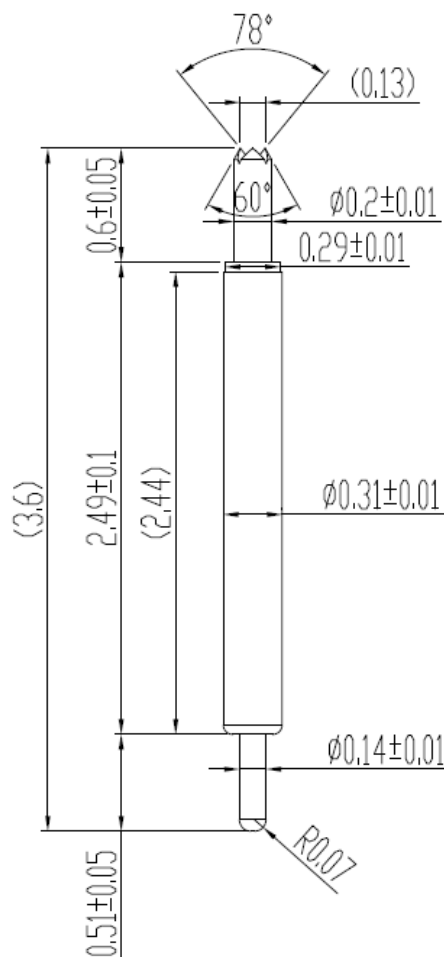

Pitch	0.4 mm
Total Length	3.6 mm
Use Length	3.3 mm
Use Stroke	0.3 mm
Recommended Top Plunger Stroke	0.2 mm
Recommended Bottom Plunger Stroke (Pre-load)	0.1 mm
Max Stroke	0.5 mm
Spring Force at Use Stroke	20 gf at 0.3 mm stroke
Operating Temperature	-40 to +200°C
DC Resistance	Avg. 41.0 mΩ at 0.3 mm stroke
Current Rating (Continuous 1Hour)	4.7 A
Current Rating (Duty cycle 30%)	5.5 A
Self Inductance	0.98 nH
Bandwidth @ -1dB	36.9 GHz
Top Plunger	BeCu / Pd Alloy
Bottom Plunger	BeCu over Ni
Barrel	Pb / Au over Ni
Spring	SUS / Au
Insertion Life	200,000 cycles

Thank you.