




*Innovative test solution
Provider*

※ Special – POGO pin for High current

IVB-SAR-370-029-A058-00

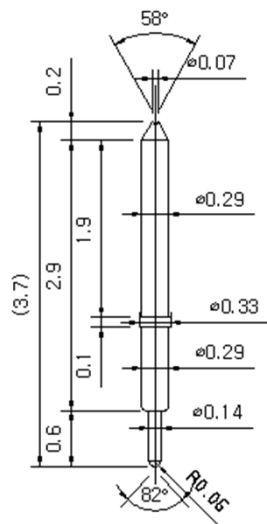

Pitch	0.4 mm
Total Length	3.7 mm
Use Length	3.3 mm
Use Stroke	0.4 mm
Recommended Top Plunger Stroke	0.3 mm
Recommended Bottom Plunger Stroke (Pre-load)	0.1 mm
Max Stroke	0.6 mm
Spring Force at Use Stroke	20 gf at 0.4 mm stroke
Operating Temperature	-40 to +140°C
DC Resistance	Avg. 43.0 mΩ at 0.4 mm stroke
Current Rating (Continuous 1Hour)	3.0 A
Self Inductance	1.12nH
Bandwidth @ -1dB	20.0 GHz
Top Plunger	BeCu / Alloy2-2H
Bottom Plunger	BeCu / Au over Ni
Barrel	PB / Au over Ni
Spring	SUS / Au
Insertion Life	100,000 cycles at 0.15-0.5 mm stroke

Thank you.