




*Innovative test solution
Provider*

※ POGO type – Kelvin solution (0.4 pitch)

IVB-SPR-390-030-A156-00

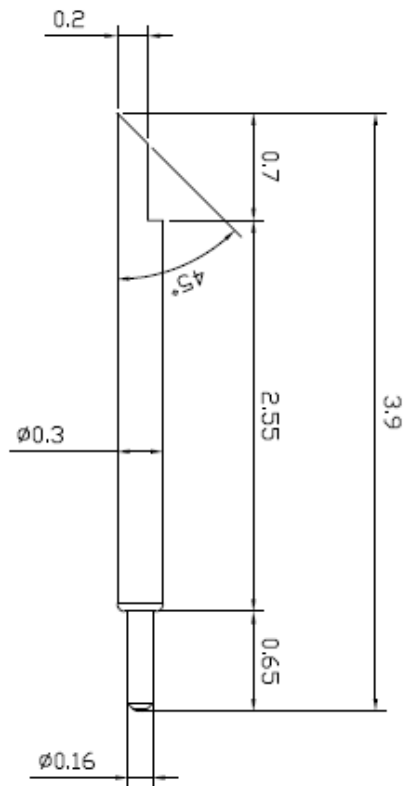

Pitch	0.40mm
Total Length	3.9mm
Use Length	3.45mm
Use Stroke	0.45mm
Recommended Top Plunger Stroke	0.20mm
Recommended Bottom Plunger Stroke (Pre-load)	0.25mm
Max Stroke	0.5mm
Spring Force at Use Stroke	22gf at 0.45mm Stroke
Operating Temperature	-40 to 120°C
DC Resistance	Avg. 50.0mΩ at 0.45mm stroke
Current Rating	1.5A
Self Inductance	1.10nH
Bandwidth @ -1dB	26.5GHz
Top Plunger	Hardened BeCu / Au Plated
Bottom Plunger	Hardened BeCu / Au Alloy Plated
Barrel	Alloy / Au Plated
Spring	Music Wire / Au Plated
Insertion Life	100,000 cycles at 0.45mm Stroke

Thank you.