




*Innovative test solution
Provider*

※ POGO type – 0.35 pitch

IVB-SAR-450-025-A211-00

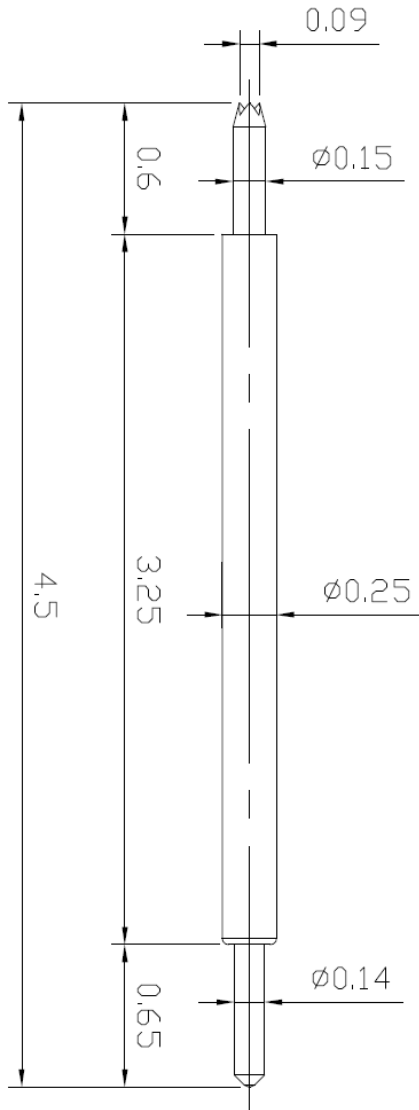

Pitch	0.35mm
Total Length	4.5mm
Use Length	4.1mm
Use Stroke	0.4mm
Recommended Top Plunger Stroke	0.15mm
Recommended Bottom Plunger Stroke (Pre-load)	0.25mm
Max Stroke	0.5mm
Spring Force at Use Stroke	20gf at 0.4mm Stroke
Operating Temperature	-50 to 200°C
DC Resistance	Avg. 56.0 mΩ at 0.4mm stroke
Current Rating	3.0A
Self Inductance	1.42 nH
Bandwidth @ -3dB	18.3 GHz
Capacitance	0.8 pF
Top Plunger	BeCu / Pd
Bottom Plunger	BeCu / Au over Ni
Barrel	Bronze / Au over Ni
Spring	SUS / Au over Ni
Insertion Life	100,000 cycles at 0.4mm Stroke

Thank you.