




*Innovative test solution
Provider*

※ General POGO pin – 4.6mm / 0.35P

IVB-DAR-460-026-A053-00

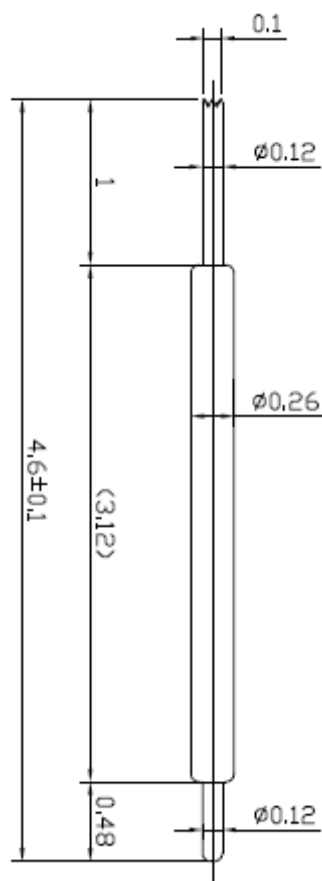

Pitch	0.35 mm
Total Length	4.6 mm
Use Length	4.1 mm
Use Stroke	0.5 mm
Recommended Top Plunger Stroke	0.3 mm
Recommended Bottom Plunger Stroke (Pre-load)	0.2 mm
Max Stroke	0.6 mm
Spring Force at Use Stroke	19 gf at 0.5 mm stroke
Operating Temperature	-40 to +140°C
DC Resistance	Avg. 68.5 mΩ at 0.5 mm stroke
Current Rating	1.0 A
Self Inductance	1.48 nH
Bandwidth @ -1dB	9.1 GHz
Top Plunger	BeCu / Au over Ni
Bottom Plunger	BeCu / Au over Ni
Barrel	BeCu / Au over Ni
Spring	SUS / Au
Insertion Life	100,000 cycles at 0.5 mm stroke

Thank you.