




*Innovative test solution
Provider*

※ POGO type – 0.35 pitch

IVB-SAR-545-026-A241-00

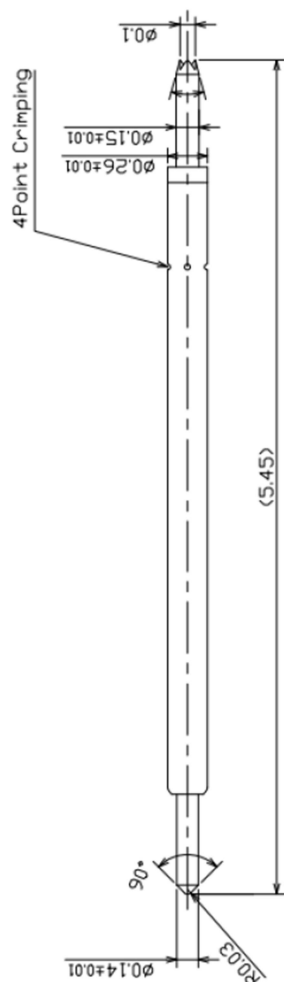


Pitch	0.35mm
Total Length	5.45mm
Use Length	5.05mm
Use Stroke	0.4mm
Recommended Top Plunger Stroke	0.15mm
Recommended Bottom Plunger Stroke (Pre-load)	0.25mm
Max Stroke	0.55mm
Spring Force at Use Stroke	20gf at 0.4mm Stroke
Operating Temperature	-45 to 200°C
DC Resistance	Avg. 65.0 mΩ under
Current Rating	4.0A
Self Inductance	1.1 nH
Bandwidth @ -1dB	20.0 GHz
Capacitance	TBD
Top Plunger	BeCu / Au over Ni
Bottom Plunger	BeCu / Au over Ni
Barrel	Alloy / Au over Ni
Spring	SUS / Au over Ni
Insertion Life	100,000 cycles at 0.4mm Stroke

※ Current test



- Applied time 2 mins
- Decrease in threshold spring force: 20%

Duty ratio	On	Off	Max Current
1.0	Continuous		4.0 A
0.5	0.1 sec	0.1 sec	6.0 A
0.1	0.1 sec	0.9 sec	8.5 A
0.01	0.1 sec	9.9 sec	9.5 A

※ Resistance test with life cycle test

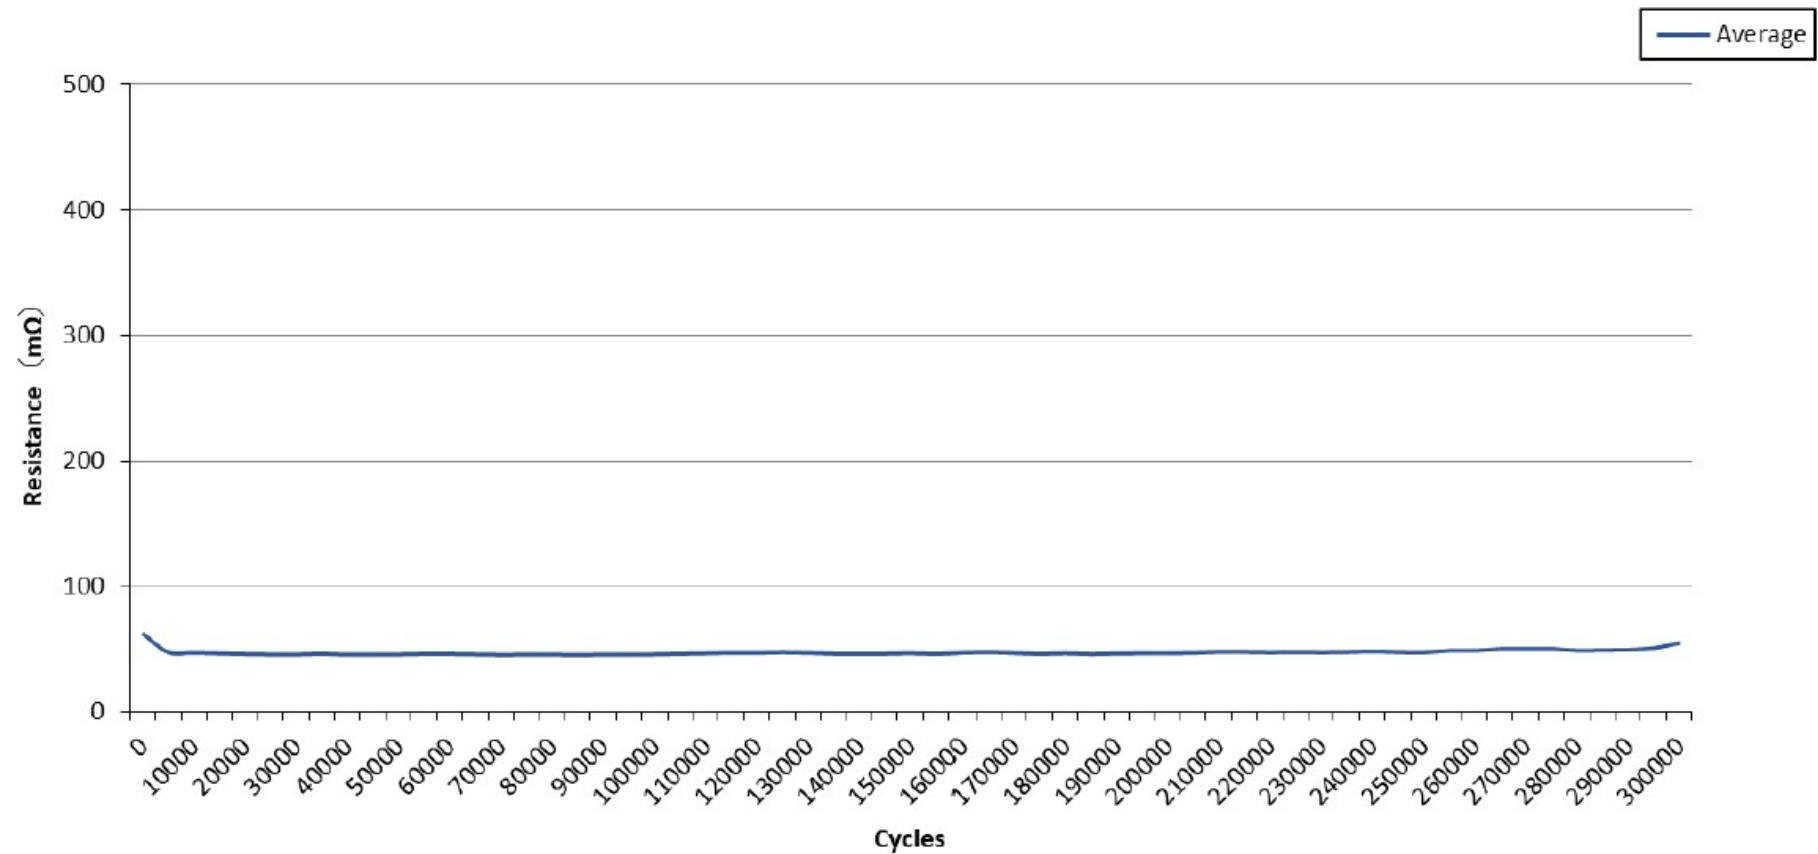

※ S2Parameter simulation data

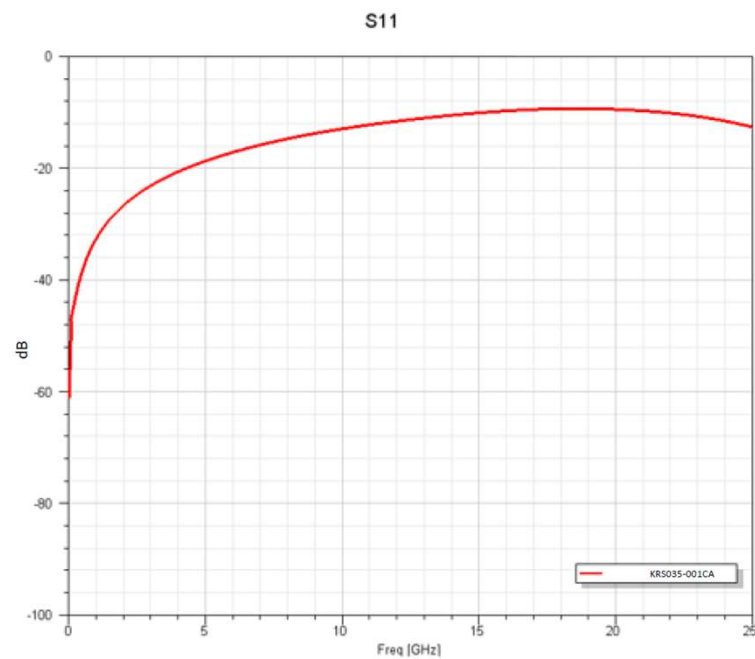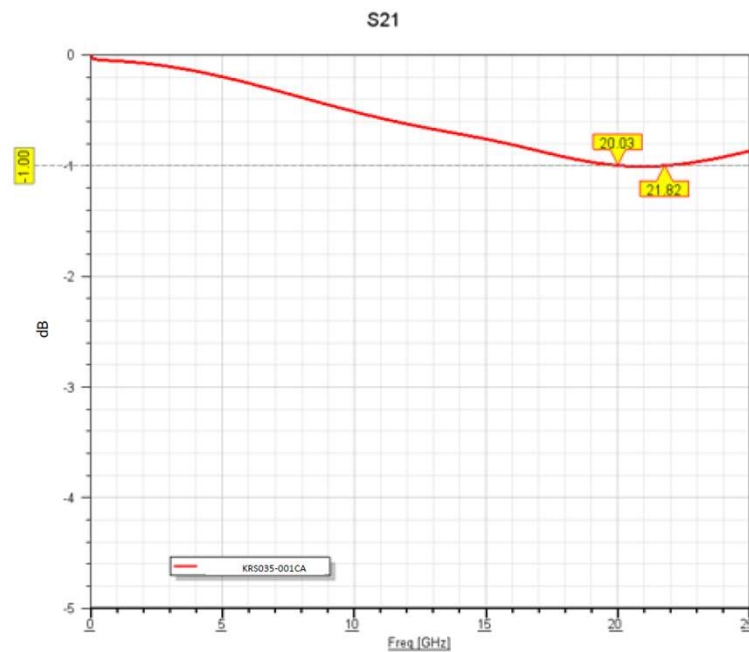

Pin name	IVB-SAR-545-026-A241-00
Test code	KRS035-001CA
Pitch [mm]	0.35
Test length [mm]	5.05
Relative permittivity of socket (Er)	4.0
Arrange	GSG
-1dB@ [GHz]	20.03

Thank you.