




*Innovative test solution
Provider*

※ POGO type – Kelvin solution (0.5 pitch)

IVB-SPR-550-038-A157-00

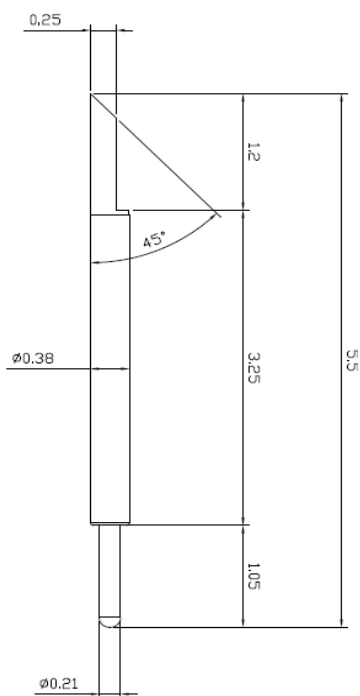

Pitch	0.50mm
Total Length	5.5mm
Use Length	5.05mm
Use Stroke	0.50mm
Recommended Top Plunger Stroke	0.30mm
Recommended Bottom Plunger Stroke (Pre-load)	0.15mm
Max Stroke	0.9mm
Spring Force at Use Stroke	31gf at 0.45mm Stroke
Operating Temperature	-40 to 140°C
DC Resistance	Avg. 50.0mΩ at 0.45mm stroke
Current Rating	1.7A
Self Inductance	1.56nH
Bandwidth @ -1dB	8.4GHz
Top Plunger	Hardened BeCu / Au Plated
Bottom Plunger	Hardened BeCu / Au Alloy Plated
Barrel	Alloy / Au Plated
Spring	Music Wire / Au Plated
Insertion Life	100,000 cycles at 0.45mm Stroke

Thank you.