


※ General POGO pin – 5.7mm / 0.3P

IVB-DCR-570-022-A222-00

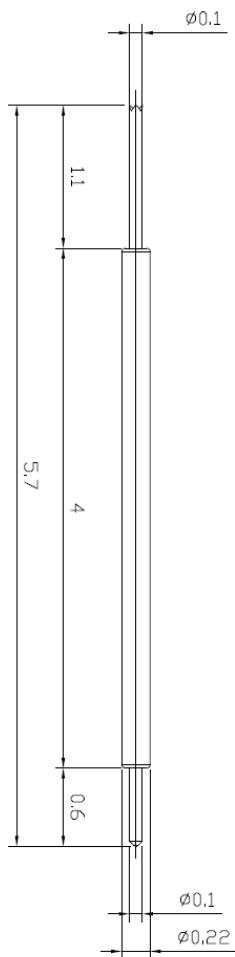

Pitch	0.5mm
Total Length	5.7mm
Use Length	5.2mm
Use Stroke	0.65mm
Spring Force at Use Stroke	10gf at 0.65mm Stroke
Operating Temperature	-40 to 150°C
DC Resistance	Under 100.0mΩ at 0.65mm stroke
Current Rating	0.5A (Continuous)
Self Inductance	1.58 nH
Bandwidth @ -1dB	7.2 GHz
Top Plunger	BeCu / Au over Ni
Bottom Plunger	BeCu / Au over Ni
Barrel	BeCu / Au over Ni
Spring	Stainless Steel / Au
Insertion Life	100,000 cycles at 0.65mm Stroke