


※ General POGO pin – 5.7mm / 0.5P

IVB-DAA-570-031-A046-00

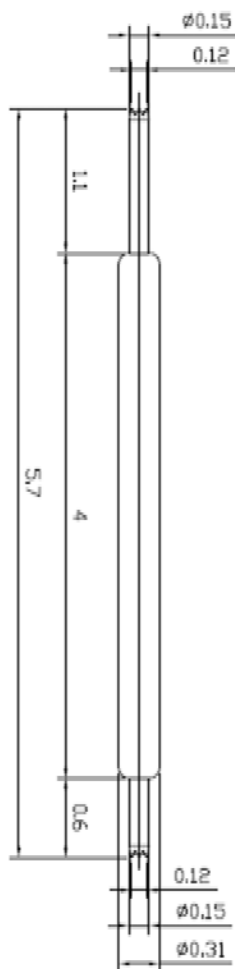

Pitch	0.5mm
Total Length	5.7mm
Use Length	5.2mm
Use Stroke	0.5mm
Spring Force at Use Stroke	20gf at 0.5mm Stroke
Operating Temperature	-40 to 150°C
DC Resistance	85.0mΩ at 0.5mm stroke
Current Rating	1.0A (Continuous)
Self Inductance	1.61 nH
Bandwidth @ -1dB	7.8 GHz
Top Plunger	BeCu / Au over Ni
Bottom Plunger	BeCu / Au over Ni
Barrel	BeCu / Au over Ni
Spring	Stainless Steel / Au
Insertion Life	100,000 cycles at 0.5mm Stroke