


※ General POGO pin – 5.7mm / 0.5P

IVB-DAA-570-038-A188-00

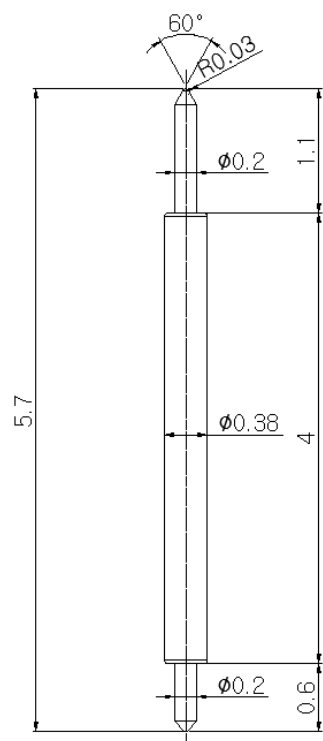

Pitch	0.5mm
Total Length	5.7mm
Use Length	5.05mm
Use Stroke	0.65mm
Spring Force at Use Stroke	13gf at 0.65mm Stroke
Operating Temperature	-40 to 200°C
DC Resistance	85.0mΩ at 0.65mm stroke
Current Rating	4.4A (Continuous)
Self Inductance	1.57 nH
Bandwidth @ -1dB	7.8 GHz
Top Plunger	BeCu / Au over Ni
Bottom Plunger	BeCu / Au over Ni
Barrel	PBT / Au over Ni
Spring	Stainless Steel / Au
Insertion Life	100,000 cycles at 0.65mm Stroke