




*Innovative test solution
Provider*



※ POGO type – 0.5 pitch high speed

IVB-DCR-570-038-A233-00

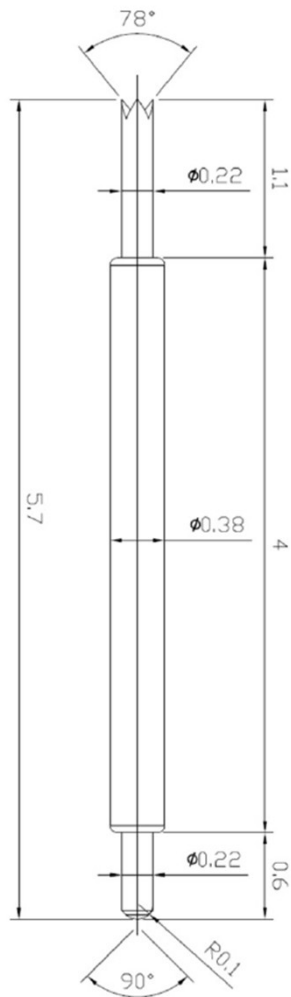

Pitch	0.5mm
Total Length	5.7mm
Use Length	5.05mm
Use Stroke	0.65mm
Max Stroke	0.85mm
Spring Force at Use Stroke	27gf at 0.65mm Stroke
Operating Temperature	-45 to 140°C
DC Resistance	50.0mΩ at 0.65mm stroke
Current Rating	1.6A
Self Inductance	1.57 nH
Bandwidth @ -1dB	16.7 GHz
Top Plunger	BeCu / Au over Ni
Bottom Plunger	BeCu / Au over Ni
Barrel	Phosphor bronze / Au over Ni
Spring	Stainless Steel / Au
Insertion Life	100,000 cycles at 0.65mm Stroke

※ POGO type – 0.5 pitch high speed

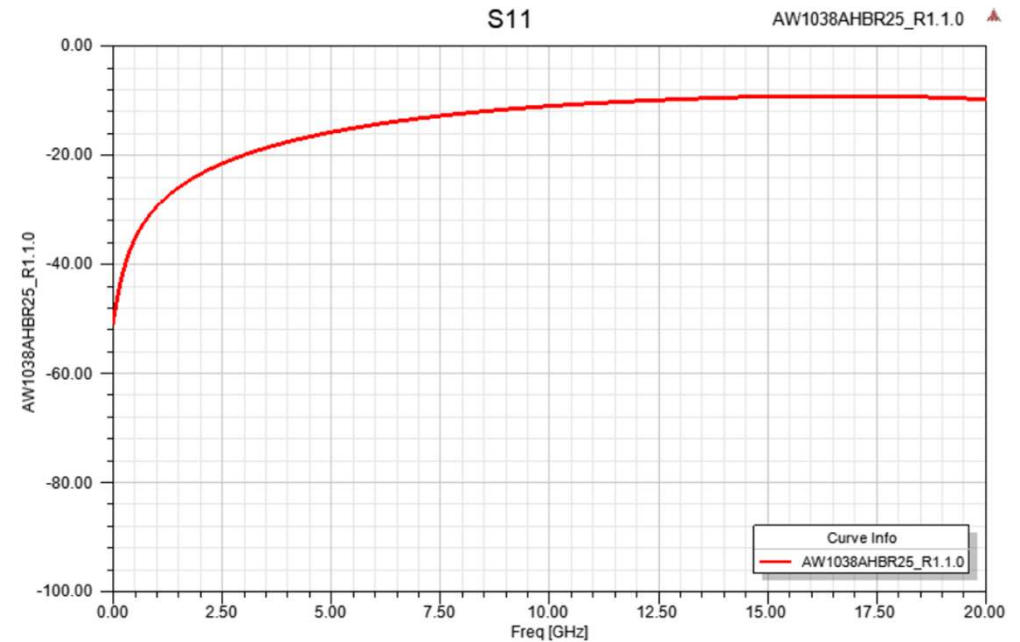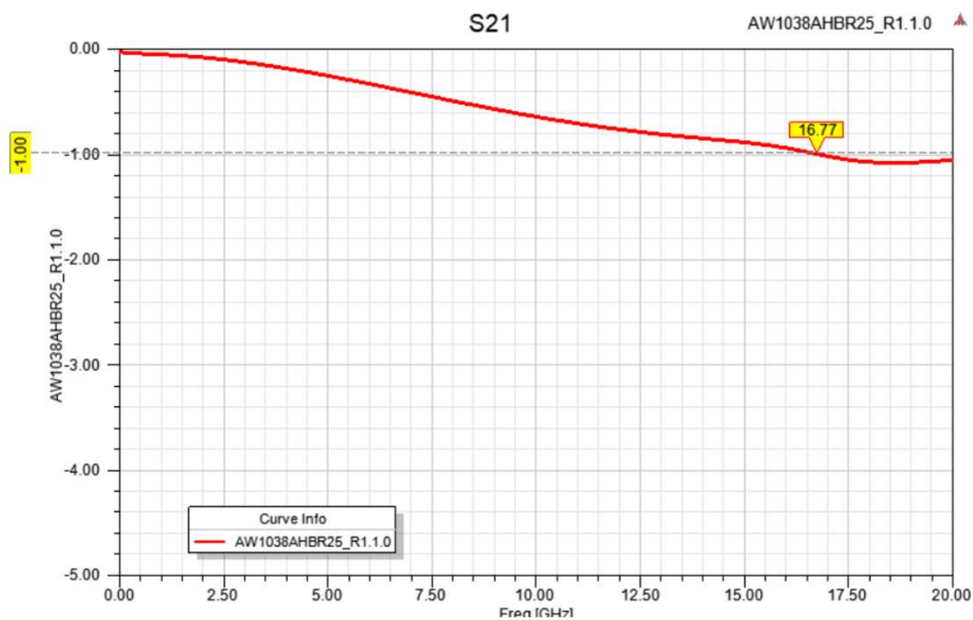

Pin name	IVB-DCR-570-038-A233-00
Test code	AW1038AHBR25_R1.1.0
Pitch	0.5
Test length	5.05
Er	4
Arrange	GSG
-1dB@	16.7

Thank you.