



*Innovative test solution
provider*

✂ Contents

I. Corporate Overview

II. Organization Chart

III. Core Value


IV. Products

V. Corporate Vision


※ Corporate Overview

- Company name : INNOVO SOLUTION. CO., LTD.
- CEO : Young-Jae Chung
- Establishment date: 13 Feb. 2007
- Location : Head office & Factory
333-9, Sangdeawon1-dong,
Jung-won-Gu Seongnam-Si, Gyeonggido,
462- 807 ,Korea
- Capitalization : ₩ 1,900,000,000

※ Organization Chart

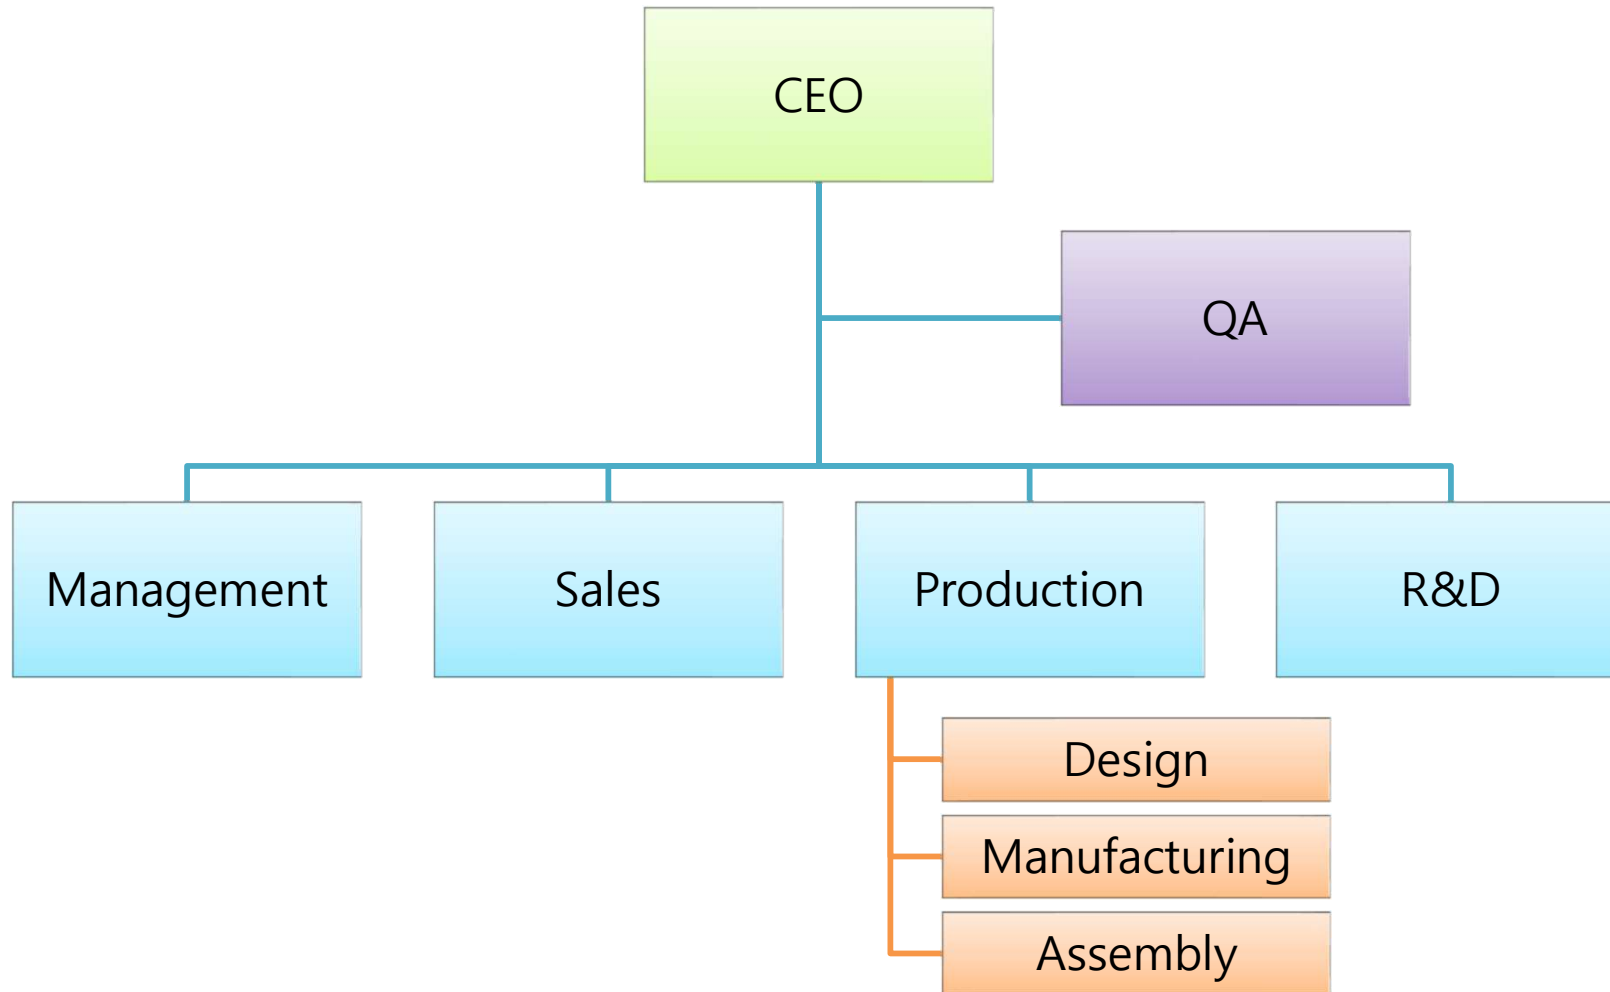


※ Core Value – *Integrated test solution*

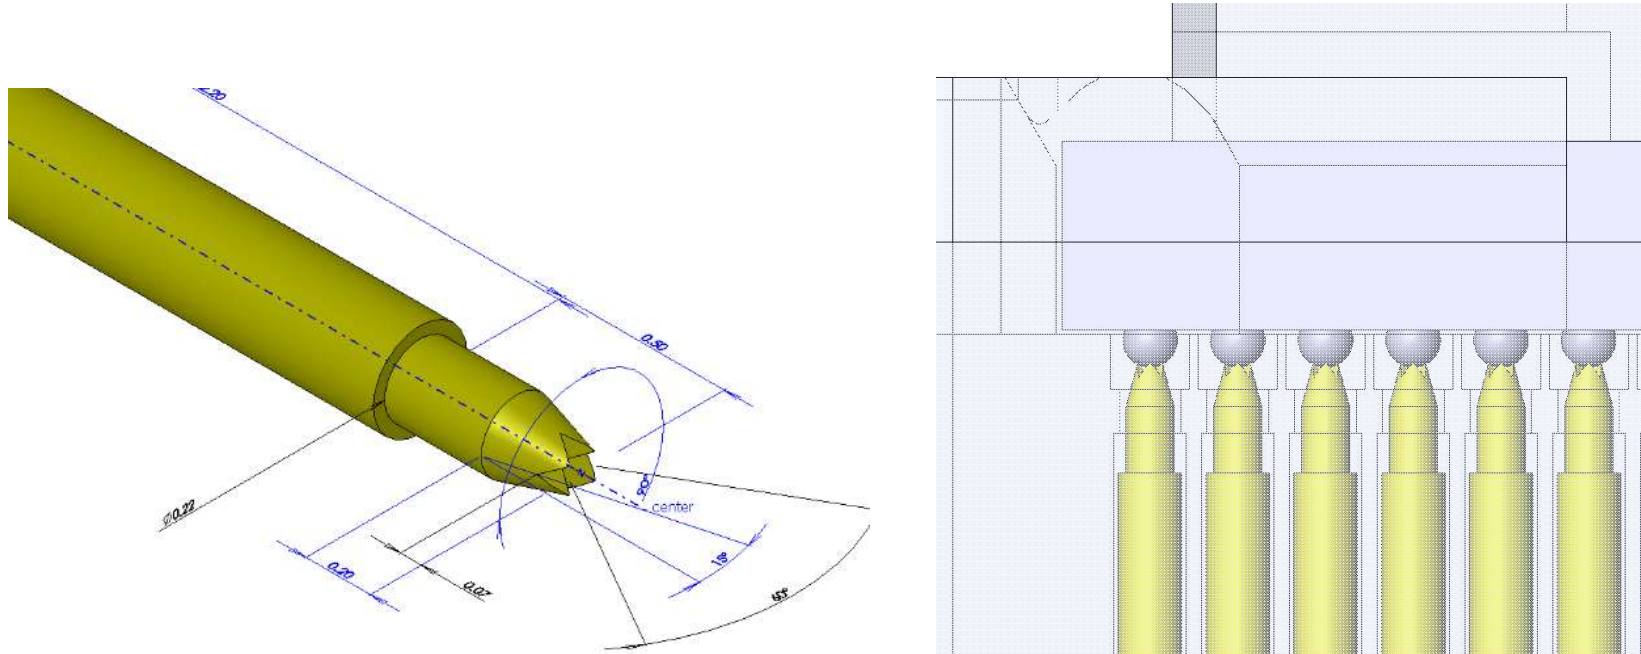

- Integrated test solution (from probe pin to test socket)
 - When started to design a Socket and Probe pin, our design team uses 3D design simulation system to analyze various aspects.
 - Which can detect any field defect or problem.

※ Core Value – *Size optimization*

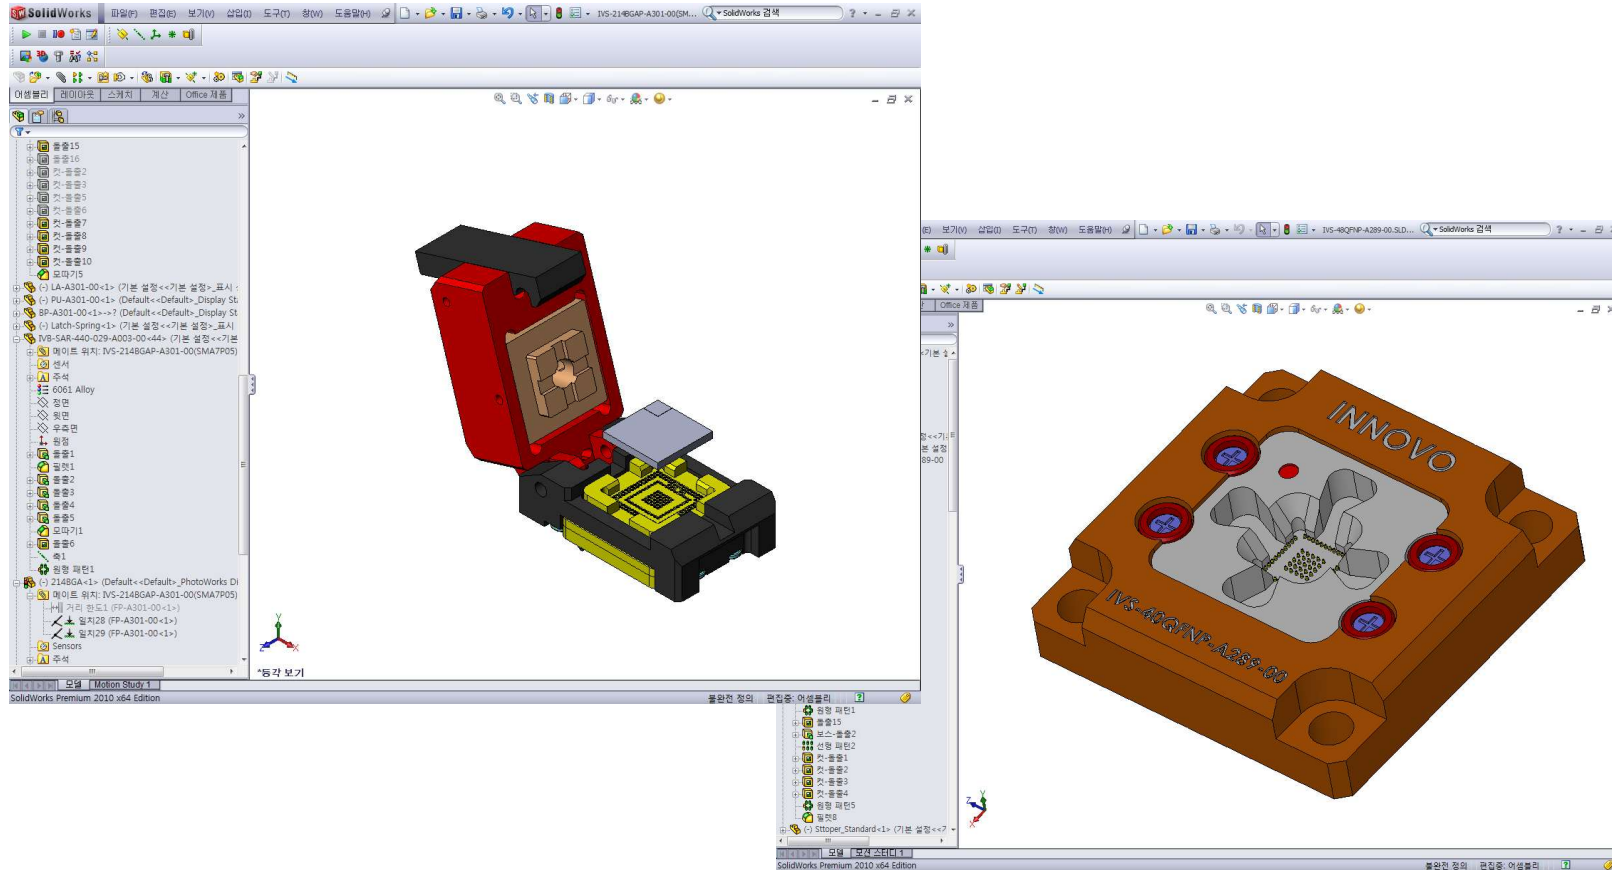


- Size optimization
 - INNOVO provides the customized and optimized test socket depending on the size of IC.
 - This is able to give the best test condition.

※ Core Value – *High current test solution*

※ Special – POGO pin for High current

IVB-SAR-360-031-A200-00

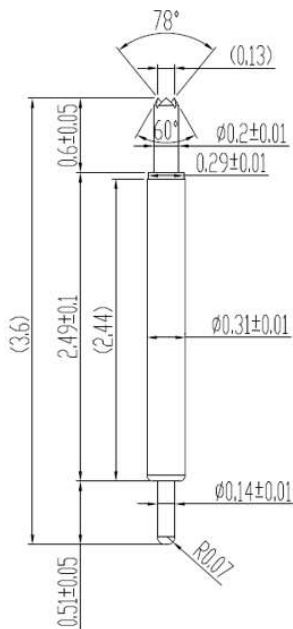

Pitch	0.4 mm
Total Length	3.6 mm
Use Length	3.3 mm
Use Stroke	0.3 mm
Recommended Top Plunger Stroke	0.2 mm
Recommended Bottom Plunger Stroke (Pre-load)	0.1 mm
Max Stroke	0.5 mm
Spring Force at Use Stroke	20 gf at 0.3 mm stroke
Operating Temperature	-40 to +200°C
DC Resistance	Avg. 36.8 mΩ at 0.3 mm stroke
Current Rating (Continuous 1Hour)	4.7 A
Current Rating (Duty cycle 30%)	5.5 A
Self Inductance	0.98 nH
Bandwidth @ -1dB	27.04 GHz
Top Plunger	BeCu / Pd
Bottom Plunger	BeCu / Au
Barrel	Pb / Au
Spring	SUS / Au
Insertion Life	200,000 cycles

RF insertion loss

Insertion loss (S21) was measured for an IVS pin based 16 pin QFN socket with an 0.5 mm pitch. All pins except the signal pin (red arrow) were grounded:




Figure 13 Insertion loss setup ("S"-signal)

It should be noted that RF properties are dependent on pin configuration, e.g. how it is captivated, grounding of surrounding pins, pitch and dielectric materials.

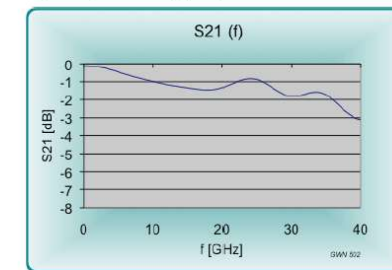


Figure 14 Insertion loss in dB

Insertion loss reaches -1 dB at 10.2 GHz and -3 dB at 39.1 GHz.

GateWave Northern, Inc.

GateWave Northern, Inc.

- High current test solution

→ INNOVO has great experience about the field of power IC & PMIC.

→ Providing the stable test result, INNOVO's socket conduct safely under the high current condition.

※ Core Value – *Customized test machine*



- Customized test machine
 - INNOVO has developed the customized test machine which is related with customer needs and condition.
 - Having a quality control system, INNOVO provides a highly reliable product to customer.

※ Products – *Probe pin*

- General POGO pin
- Special POGO pin *(for High current & Low pitch)*
- Customized probe pin




Tip style & Application

※ Products - *Test socket & JIG Application*




BGA



QFN



PCB test JIG

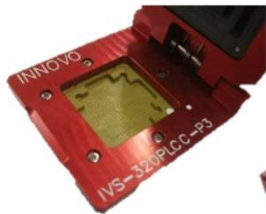


PLCC



QFP




WLCSP

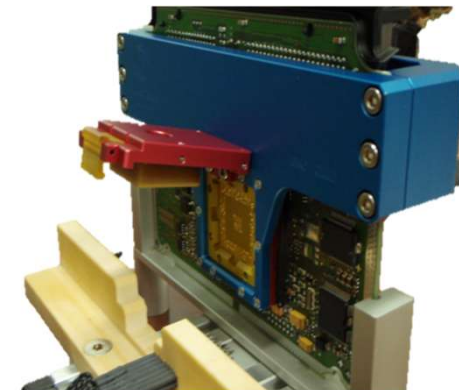

ECU test JIG

※ Corporate Vision

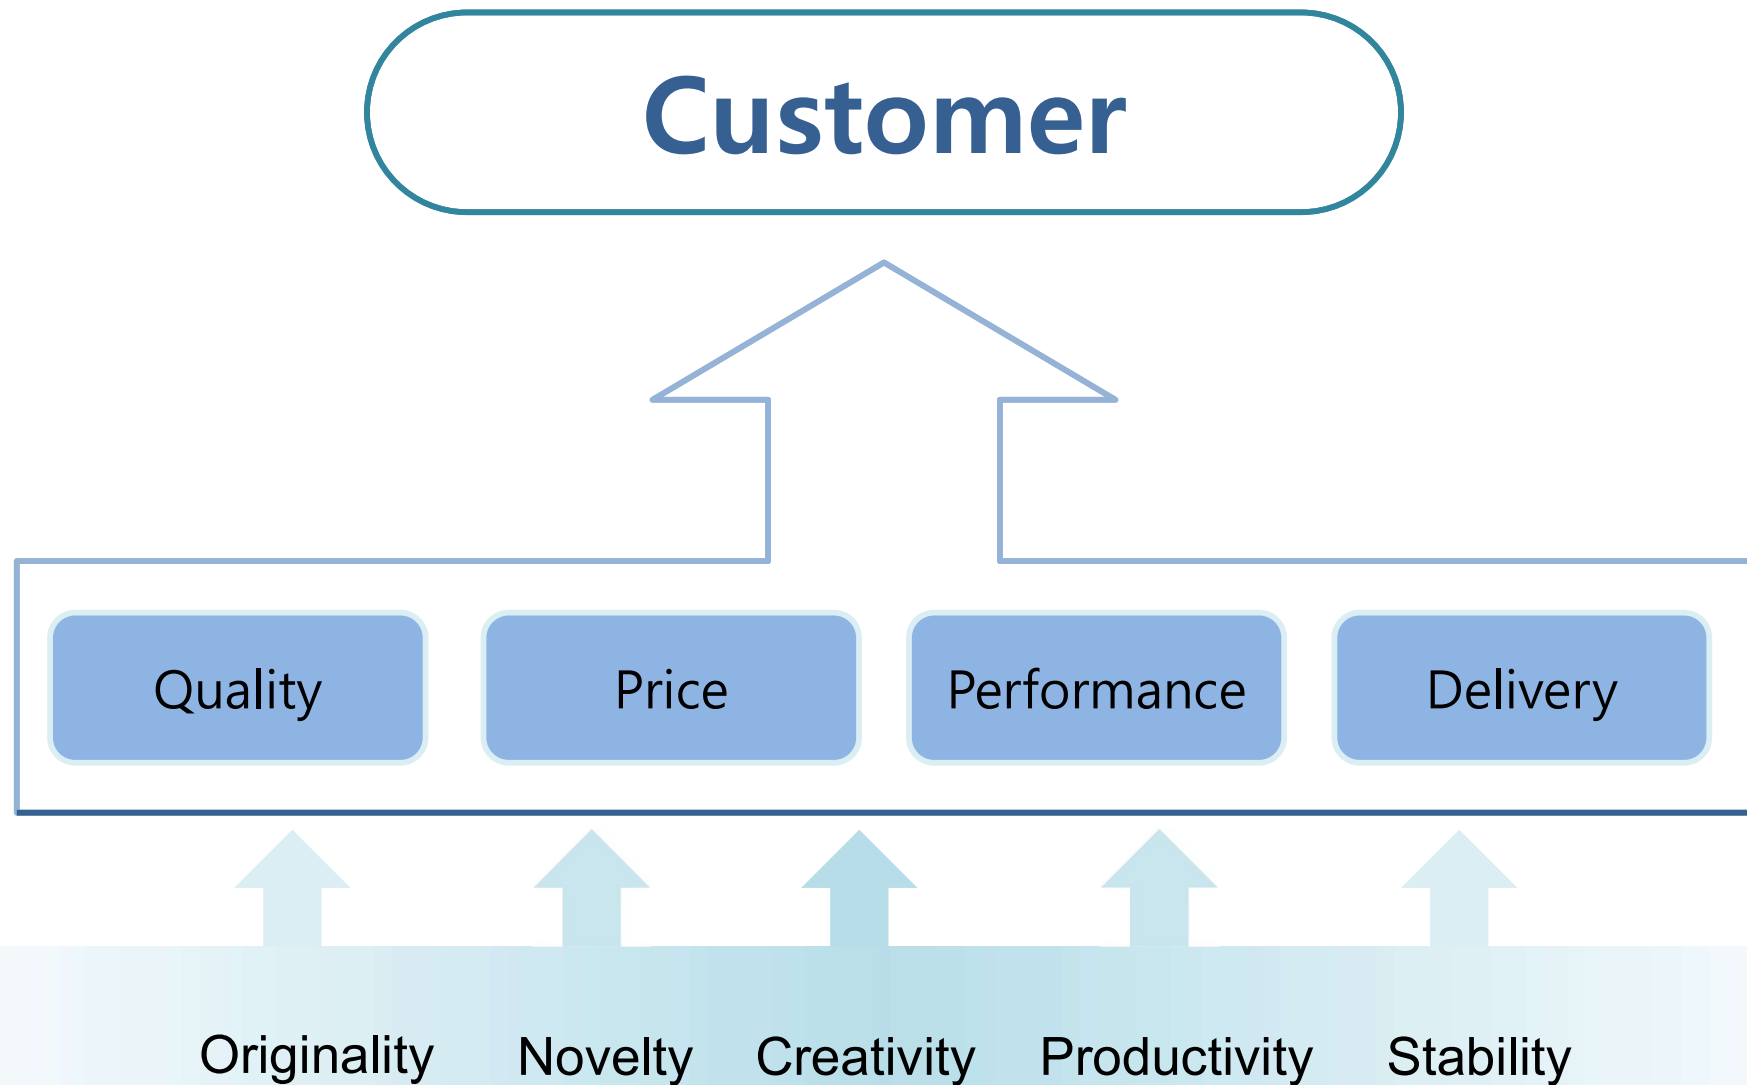

※ Major Accounts



Thank you.

InnovoSolution Co., Ltd.

Indy (SB) Chung
Director
Phone: +82-10-2850-9025
Fax: +82-31-735-6145