# PENTAIR STA-RITE

## WP/MULTI EVO-A

BOOSTER SETS - FIX SPEED

- Reduces water hammer effect
- Ideal as a water supply system in the building
- Ready to use

- Reduction of the starting frequency with the 50 I tank
- Very easy to install




#### **DESCRIPTION**

The Pressure booster set WATERPRESS are made with self-priming multi-stage centrifugal pumps Multi EVO-A. They are supplied wired, complete with a 24 l or 50 l expansion module, ready for installation and use. All models are certified for use with drinking water (ACS).

#### **APPLICATIONS**

- Lifting and distribution of water in domestic systems in continuous or intermittent operation
- Pressurization systems
- · Washing systems
- Irrigation

#### **PERFORMANCE**

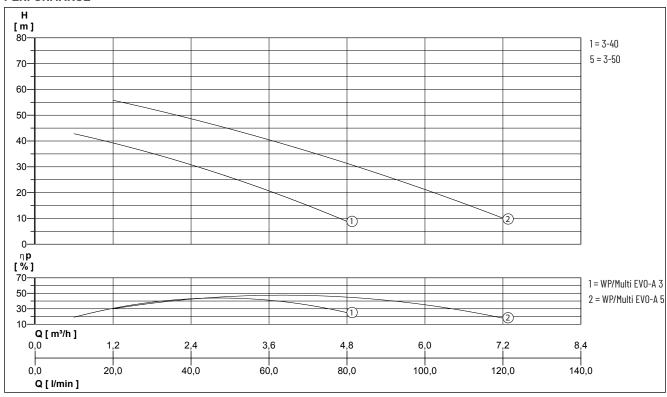

We reserve the right to change specifications without notice. Pump performance is subject to ISO 9906:SO 9906:SO 9906:2012 - Grade 3B tolerances. The right to change specifications without notice. Pump performance is subject to ISO 9906:SO 9906

Туре	Flow rate Q[m³/h]	0.6	1.2	1.8	2.4	3	3.6	4.8	6	7.2
WP/Multi EVO-A 3-40 M/M-50I 230V-50Hz	Delivery head H[m]	42.5	39.5	35.5	31.0	25.5	20.5	9.0		
WP/Multi EVO-A 5-50 M-SS/M-50I 230V-50Hz			56.0	52.0	48.5	45.0	40.5	31.0	21.5	10.0

D 402 - 1810

# WP/MULTI EVO-A

### BOOSTER SETS - FIX SPEED

### **MECHANICAL DATA**

Shaft	Stainless steel X5 CrNi 1810	Contourface	Ceramic / NBR
	(AISI 304)	Operating pressure max.	8 bar
Impeller	PPO reinforced with fibreglass	Type of liquid	clean water without suspend-
Motor housing	Die-cast aluminium		ed solids or abrasive material
Pump housing	Stainless steel X5 CrNi 1810	Temperature of the liquid max.	50 °C
	(AISI 304)	Suction height max.	8 m
Diffuser	PPO reinforced with fibreglass	Gasket	NBR 70 Shore A
Mechanical seal	Carbon graphite / NBR / SS		


### **ELECTRICAL DATA**


Voltage	1/N/PE~230 V	Insulation class	F	
Power line	1.5 m H05 RN-F	Plug	Safety	
Type of enclosure	IP 55	Rotation speed	2850 rpm	

### WP/MULTI EVO-A

Туре	Code No.	Motor rating		Current	Weight
		P1	P2		
WP/Multi EVO-A 3-40 M 230V-50Hz	N5302140	0.80 kW	0.5 kW	3.7 A	13.6 kg
WP/Multi EVO-A 3-40 M-50I 230V-50Hz	N5302142	0.80 kW	0.5 kW	3.7 A	18.0 kg
WP/Multi EVO-A 5-50 M-SS 230V-50Hz	N5304151	1.35 kW	1.0 kW	6.2 A	14.0 kg
WP/Multi EVO-A 5-50 M-50I 230V-50Hz	N5304152	1.35 kW	1.0 kW	6.2 A	20.5 kg

### 24 I







# WP/MULTI EVO-A

### BOOSTER SETS - FIX SPEED

50 I





### DIMENSIONS [mm]

Type	А	В	С	D	F	G	Н	1	L	DNA	DNM	Е
WP/Multi EVO-A 3-40 M 230V-50Hz	380	139	245	295	410	530	190	240	9	1″	1″	495
WP/Multi EVO-A 3-40 M-50I 230V-50Hz	380	139	315	365	520	640	242	295	9	1″	1″	660
WP/Multi EVO-A 5-50 M-SS 230V-50Hz	422	162	248	300	435	540	218	272	11	1"	1″	490
WP/Multi EVO-A 5-50 M-50I 230V-50Hz	422	162	215	365	520	640	242	295	9	1″	1″	660