

SPECIFICATION

PUMP VAC-100

PUMP

PUMP CASING - COVER	ALUMINIUM L-2610
IMPELLER	IRON CASTING
DIFUSSER - CASSING	IRON CASTING
MECHANICAL SEAL TYPE	TPE - Ø 1" CARBON - CERAMIC
EXECUTION	MONOBLOC
INLET - OUTLET	4" BSP - 4" BSP MALE
STANDART ACCESSORIES	PIPE FITTINGS - CLAMPS - FILTER
GROSS WEIGHT PUMP	12 Kg
CE	CERTIFIED


HONDA GX-390 ENGINE

TYPE	AIR COOLED 4 STROKE OHV
DISPLACEMENT	389 cm ³
NET POWER	11,7 HP (KW 8,7) @ 3600 rpm
STARTING SYSTEM	RECOIL / ELECTRIC (OPTIONAL)
FUEL TANK CAPACITY	6,1 Litres (6,4 U.S. qts)
OPERATING TIME	2 hrs. approx.
OIL CAPACITY	1,1 Litres (1,16 U.S. qts)
FUEL	95 OCTANE
EMISSIONS	CARP AND EPA CERTIFIED
MOTOR PUMP GROSS WEIGT	43 Kg



PERFORMANCE CURVE

PUMP VAC-100


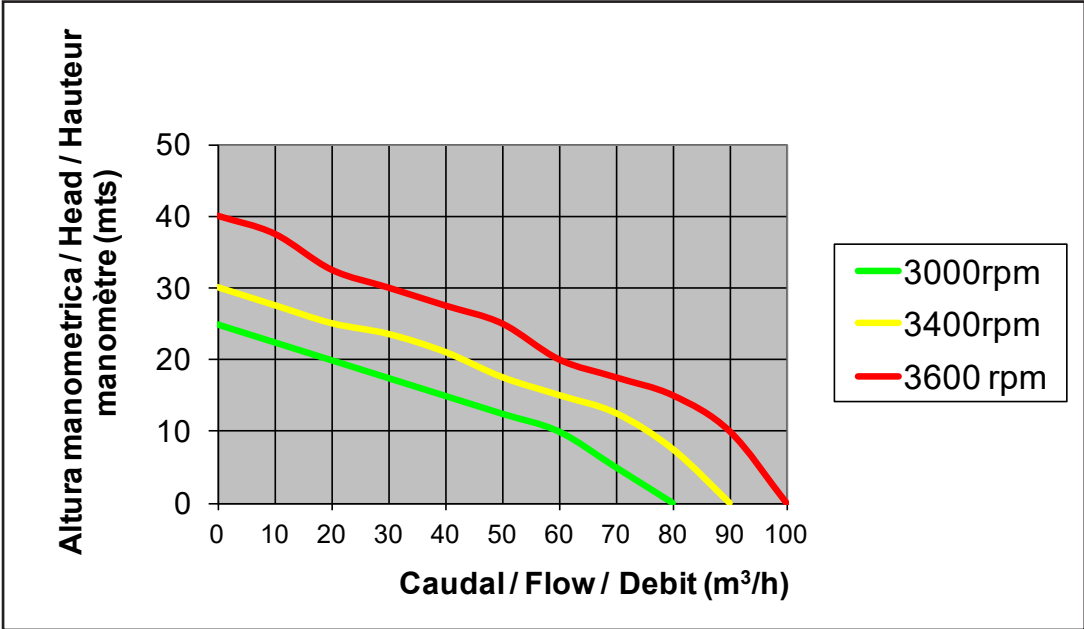


R.P.M.	H = TOTAL HEAD (m)					
	0	10	20	30	40	
3.000	80	60	20	0		DELIVERY VOLUME m³/h
3.400	90	75	41	0		
3.600	100	90	60	30	0	


MAX. SUCTION LIFT 7 m

DIMENSIONS m.m.

PUMP VAC-100

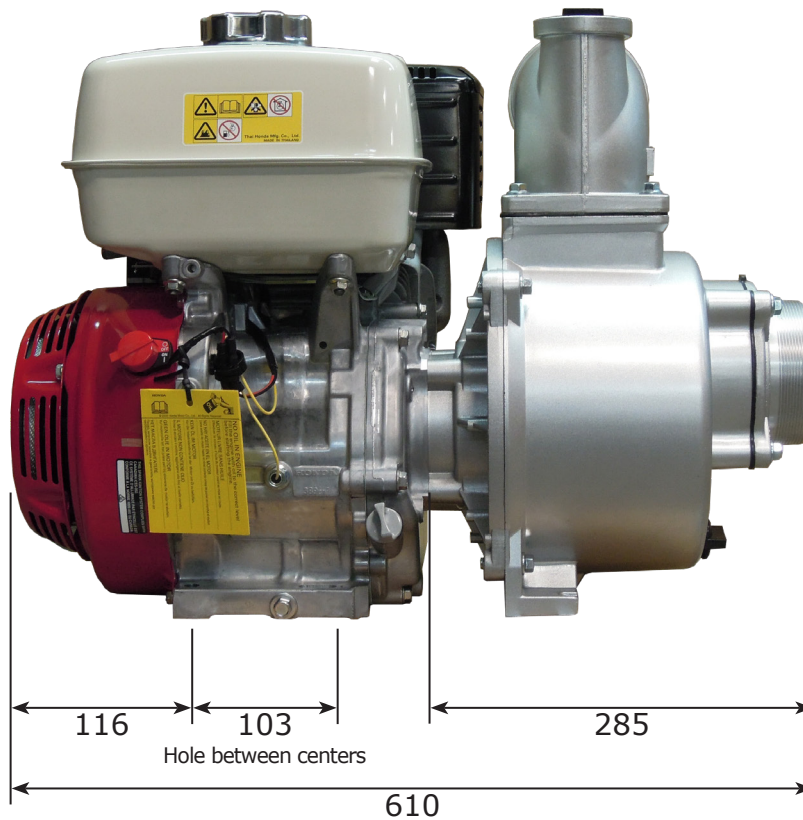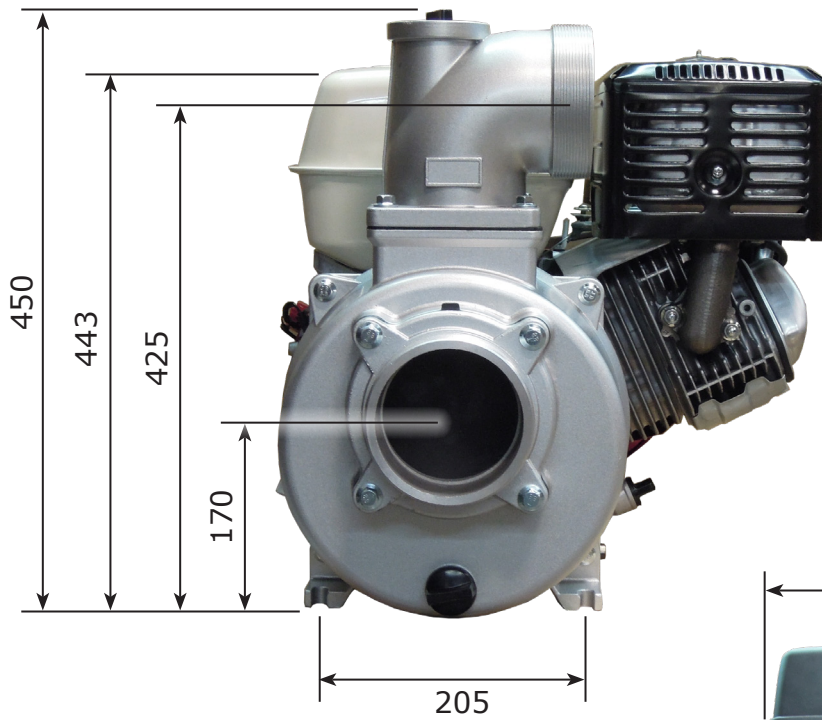

PTO SHAFT

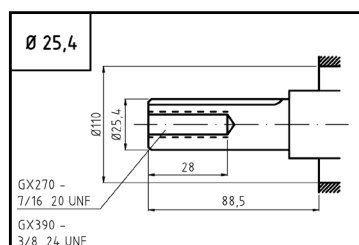Q TYPE Ø 25,4
STRAIGHT SHAFT

AVAILABLE OPTIONS

ELECTRIC START

MECHANICAL SEAL: ANTIWEAR (SILICON - VITON)

STAINLESS STEEL FRAME



VAC-100 wint
stainless steel frame



VAC-100 wint stainless
steel frame portable