



BENZENE

ELECTRICALS

— TESTING EQUIPMENTS —

PRECISION • RELIABILITY • PERFORMANCE

TESTING EQUIPMENTS

PRODUCT CATALOGUE 2026

SOLUTIONS FOR A SAFER,
SMARTER, MORE EFFICIENT TOMORROW



Power Quality
Analyzers



Thermal
Imaging



Electrical
Testing



Load Banks &
Diagnostics



BENZENE
ELECTRICALS
TESTING EQUIPMENTS

PRECISION • RELIABILITY • PERFORMANCE

TESTING EQUIPMENTS

PRODUCT CATALOGUE 2026



Precision



Performance



Reliability



Acrasia Private Limited

Precision • Reliability • Performance

Company Profile




About Benzene Electricals

Benzene Electricals, a proud subsidiary of Acrasia Private Limited, stands at the forefront of providing premium testing equipments and comprehensive energy management solutions. Drawing upon years of technical expertise, we specialize in delivering high-precision instruments designed to meet the rigorous demands of modern industrial and commercial environments.

Our commitment is to empower organizations by providing tools that ensure safety, optimize performance, and guarantee reliability across diverse sectors including Manufacturing, Power Generation, Oil & Gas, and Construction. We offer customized solutions ranging from sophisticated Power Quality Analyzers to robust, heavy-duty Load Banks.

Industry Segments

- Manufacturing & Steel
- Oil, Gas & Mining
- Construction & EPC
- Power Generation
- Data Centers & IT
- Telecommunications



Acrasia Private Limited

Precision • Reliability • Performance

Our Core Values



Uncompromising Quality

Ensuring every product meets the highest standards of precision and durability.



Continuous Innovation

Constantly updating our portfolio with the latest technological advancements.



Customer Centricity

Building lasting relationships through transparent service and dedicated support.




Global Standards

Adhering to international safety and operational protocols in all solutions.

Our Vision

To be the most trusted partner in electrical testing and energy management, delivering innovative and productized solutions that empower a safer, more efficient industrial ecosystem.



Acrasia Private Limited

Precision • Reliability • Performance

Power Quality Analyzers

Benzene Electricals provides state-of-the-art Power Quality Analyzers designed for comprehensive measurement and analysis of electrical networks. Our ALM series ensures high accuracy and reliability for critical industrial applications.

ALM 20



- 3 Voltage & 3 current Channels
- AC/DC Voltage: Upto 1,000 V Ph-N
- THD (V, I) & Individual Harmonics: Upto 50 order
- PC interface & Android application
- Self-powered, via the phase

ALM 31



- 3 Voltage & 3 Current Channels
- 5.7" Color VGA TFT screen display
- Complied with IEC 61000-4-30 Class B
- Short flicker measurement (Pst)
- Battery backup upto 13 hours

CA 8345

Class A Analyzer

The ultimate solution for compliance testing and deep power quality analysis, certified to IEC 61000-4-30 Class A Ed 3.0.



- 512 samples/cycle resolution
- 7" color LCD touch screen
- 2.5 μ s transients capture
- Harmonics up to 127th order
- Massive 64 GB internal memory

Benzene Electricals provides state-of-the-art Power Quality Analyzers designed for comprehensive measurement and analysis of electrical networks. Our ALM series ensures high accuracy and reliability for critical industrial applications.

ALM 36



- 4 Voltage & 4 Current Channels
- 5.7" Color VGA TFT screen display
- Complied with IEC 61000-4-30 Class B
- Short flicker measurement (Pst)
- Battery backup upto 13 hours

Thermal Imaging

Discover anomalies before they become failures. Benzene Electricals offers a versatile range of Thermal Imagers, from compact entry-level units to high-resolution professional camcorders for demanding predictive maintenance.

MA 250

Compact Mobile



- **IR Resolution:** 256 × 192
- **Temp Range:** -20°C to 400°C
- **NETD:** <40 mK
- **FOV:** 50° × 37.2°

- **Frequency:** 50 Hz
- **Features:** SuperIR, Thermal/PIP, USB-C & Lightning

TC E050

Entry-Level Handheld



- **IR Resolution:** 96 × 96
- **SuperIR:** 240 × 240
- **Temp Range:** -20°C to 550°C
- **NETD:** <50 mK
- **FOV:** 50° × 50°

- **Features:** Thermal/Visual/Fusion, 8 hr Battery, 2.4" LCD

TC S030

Portable Precision



- **IR Resolution:** 96 × 96
- **Temp Range:** -20°C to 350°C
- **NETD:** <50 mK
- **FOV:** 50° × 50°
- **Display:** 3.5" Touch

- **Features:** SuperIR, Thermal/ Visual/ Fusion, PIP/Blending

TC 2150

Compact Thermal Imager



- **IR Resolution:** 192 × 144
- **SuperIR:** Yes
- **Temp Range:** -20°C to 550°C
- **NETD:** <40 mK
- **FOV:** 27.8° × 37.2°

- **Features:** Thermal/Visual/Fusion, PIP, 6 hr Battery

Discover anomalies before they become failures. Benzene Electricals offers a versatile range of Thermal Imagers, from compact entry-level units to high-resolution professional camcorders for demanding predictive maintenance.

TC S240

Compact Precision



- **IR Resolution:** 256 x 192 (49,152 px)
- **Temp Range:** -20°C to 400°C
- **NETD:** <40 mK
- **Display:** 3.5" LCD Touch
- **Features:** SuperIR, WiFi, Fusion Mode

TC 3250

Professional Handheld



- **IR Resolution:** 256 x 192
- **SuperIR:** 512 x 384
- **Temp Range:** -20°C to 550°C
- **NETD:** <40 mK
- **FOV:** 25° x 18.8°
- **Features:** 8 MP Camera, Touch LCD, Interchangeable Battery

TC 2250 Advanced Thermal Imager



- **IR Resolution:** 256 x 192 (49,152 px)
- **Temp Range:** -20°C to 400°C
- **NETD:** <40 mK
- **Display:** 3.5" LCD Touch
- **Features:** SuperIR, WiFi, Fusion Mode

TC 3151

Professional Handheld



- **IR Resolution:** 256 x 192
- **SuperIR:** 512 x 384
- **Temp Range:** -20°C to 550°C
- **NETD:** <40 mK
- **FOV:** 25° x 18.8°
- **Features:** 8 MP Camera, Touch LCD, Interchangeable Battery

Discover anomalies before they become failures. Benzene Electricals offers a versatile range of Thermal Imagers, from compact entry-level units to high-resolution professional camcorders for demanding predictive maintenance.

TC 3360

Professional Thermal Imager



- **IR Resolution:** 384 × 288
- **SuperIR:** 768 × 576
- **Temp Range:** -20°C to 650°C
- **NETD:** <30 mK
- **FOV:** 41.1° × 30.5°
- **Features:** 8 MP Camera, Fusion/PIP, 3.5" Touch LCD

TC 3660

High-Resolution Imager



- **IR Resolution:** 640 × 480
- **SuperIR:** 1280 × 960
- **Temp Range:** -20°C to 650°C
- **NETD:** <35 mK
- **FOV:** 41.9° × 33.3°
- **Features:** 8 MP Camera, Fusion/PIP, 3.5" Touch LCD

TC P360

Advanced Thermal Imager



- **IR Resolution:** 384 × 288
- **SuperIR:** 768 × 576
- **Temp Range:** -20°C to 650°C
- **NETD:** ≤50 mK
- **FOV:** 24° × 18°
- **Features:** Auto Focus, Optional Lenses, 8 hr Battery

TC 4360

Advanced Diagnostics



- **IR Resolution:** 384 × 288
- **SuperIR:** 768 × 576
- **Temp Range:** -20°C to 650°C
- **NETD:** <35 mK
- **FOV:** 25° × 19°
- **Features:** Laser AF, 50 Hz, 4.3" Touch LCD

Discover anomalies before they become failures. Benzene Electricals offers a versatile range of Thermal Imagers, from compact entry-level units to high-resolution professional camcorders for demanding predictive maintenance.

TC 4460 / TC 4460H

Professional Diagnostics



- **IR Resolution:** 480 × 360
- **SuperIR:** 960 × 720
- **Temp Range:** Up to 650°C / 2000°C
- **NETD:** <35 mK
- **FOV:** 18.7° × 14°
- **Features:** Laser AF, 50 Hz, 8 MP Camera

TC 4660 / TC 4660H

High-Resolution Diagnostics



- **IR Resolution:** 640 × 480
- **SuperIR:** 1280 × 960
- **Temp Range:** Up to 650°C / 2000°C
- **NETD:** <35 mK
- **FOV:** 25° × 19°
- **Features:** Laser AF, 50 Hz, 8 MP Camera

Thermal Camcorders



Turn thermal insights into smarter decisions. Benzene Electricals offers professional Thermal Camcorders built for high-resolution imaging, accurate temperature measurement, and reliable predictive maintenance.

TCC 7460 / TCC 742K

Professional Thermal Camcorder



- **IR Resolution:** 480 × 360
- **SuperIR:** 960 × 720
- **Temp Range:** -20°C to 650°C / -40°C to 2200°C
- **NETD:** <30 mK
- **Display:** 5" LCD Touch
- **Features:** Laser AF, 8 MP Camera, Interchangeable Battery

TCC 7660 / TCC 762K

High-Resolution Camcorder




- **IR Resolution:** 640 × 480
- **SuperIR:** 1280 × 960
- **Temp Range:** -20°C to 650°C / -40°C to 2200°C
- **NETD:** <30 mK
- **Display:** 5" LCD Touch
- **Features:** Laser AF, 8 MP Camera, Interchangeable Battery

TCC 812K

Ultra-High Resolution Camcorder



- **IR Resolution:** 1280 × 1024
- **SuperIR:** 2560 × 2048
- **Temp Range:** -40°C to 2200°C
- **NETD:** <20 mK
- **Display:** 5.1" OLED Touch
- **Features:** Laser AF, 13 MP Camera, Interchangeable Battery



Acrasia Private Limited

Precision • Reliability • Performance

Insulation Testers

Prevent electrical failures before they happen. Benzene Electricals offers a versatile range of Insulation Testers, from compact 1kV testers to high-voltage 15kV solutions for reliable electrical testing, maintenance, and diagnostics.

CA 6522/CA 6528

SALIENT FEATURES

- Display: 4000 counts, double digital backlit LCD screen
- Logarithmic bargraph (CA 6522)
- Continuity at 200mA
- CA 6528: 0.001Ω - 400Ω
- CA 6522: 0.00Ω - 10.00Ω
- Visual alarm: Blue/Red backlighting (CA 6528)
- Timer: Up to 39:59
- Automatic shutdown, Hold, Manual / Lock / Duration modes
- IP 40 (CA 6528), IP 54 (CA 6522)



Professional 1kV Insulation Testers

MEASUREMENTS

Insulation

Test Voltage:

- 250 V, 500 V, 1000 V

Range/Accuracy:

- CA 6522: 50 kΩ to 40 GΩ (±3% +2 counts)
- CA 6528: 50 kΩ to 110 GΩ (±1.5% +10 pt)

Voltage

- Range: Up to 700 V

CA 6524 / CA 6526

SALIENT FEATURES

- Display: 4000 counts, double + bargraph
- Continuity at 200mA (0.00Ω - 10.00Ω)
- 20mA (0.01Ω - 100.0Ω)
- PI & DAR
- Visual Pass/Fail: Red/Green (CA 6526)
- Timer (min/s): Up to 39:59
- Configurable alarms
- Memory:
- 300 measurements (CA 6524)
- 1300 measurements (CA 6526)
- Communication: Bluetooth (CA 6526)



Advanced 1kV Insulation Testers

MEASUREMENTS

• Insulation

- Test Voltage: 50 V, 100 V, 250 V, 500 V, 1000 V
- Test current: 0.01μA to 2mA
- Range: 10 kΩ to 20 GΩ
- Accuracy: ±3% +2 counts

• Voltage

- Range: Up to 700 V

• Capacitance

- Range: 0.1 nF to 10 μF (CA 6526)

Prevent electrical failures before they happen. Benzene Electricals offers a versatile range of Insulation Testers, from compact 1kV testers to high-voltage 15kV solutions for reliable electrical testing, maintenance, and diagnostics.

CA 6532 / CA 6534 / CA 6536

Specialized Insulation Testers

SALIENT FEATURES

- Display: 4000 counts, double + bargraph
- PI & DAR (CA 6532)
- Continuity at 200mA (0.00 Ω - 10.00 Ω)
- 20mA (0.01 Ω - 100.0 Ω)
- Memory:
- 1300 records (CA 6532 & 6534)
- Communication:
- Bluetooth (CA 6532 & 6534)



MEASUREMENTS

- **Insulation**
Test Voltage: 250 V, 500 V, 1000 V
Range/Accuracy:
 - CA 6522: 50 k Ω to 40 G Ω ($\pm 3\%$ +2 counts)
 - CA 6528: 50 k Ω to 110 G Ω ($\pm 1.5\%$ +10 pt)
- **Voltage**
Range: Up to 700 V

CA 6505 / CA 6545

5kV High Voltage Insulation Testers

SALIENT FEATURES

- Display: Backlit LCD graphic display with bargraph
- Programmable test duration
- Automatic calculation of the DAR/PI
- DD calculation (CA 6545)
- Locking test voltage
- Programmable Alarms (CA 6545)
- Smoothing of Display (CA 6545)
- Automatic detection of the presence of AC or DC voltage on terminals
- Auto power save mode to save battery



MEASUREMENTS

- **Insulation**
Test voltage (Fixed/Adjustable): 500 V, 1000 V, 2500 V, 5000 V
500 V to 5100 V in 10 V or 100 V Increments
Range: 1 Ω to 10 T Ω
Accuracy: $\pm 5\%$ ± 3 pts
- **Voltage Range:** Up to 5100 V
- **Leakage Current:** Output: 3 mA
- **Capacitance:** Up to 49.99 μ F

Prevent electrical failures before they happen. Benzene Electricals offers a versatile range of Insulation Testers, from compact 1kV testers to high-voltage 15kV solutions for reliable electrical testing, maintenance, and diagnostics.

CA 6547 / CA 6549

SALIENT FEATURES

- Large backlit LCD screen, with digital display & bargraph
- Automatic calculation of the DAR/PI/DD ratios
- Programmable alarms
- Displays an error code in an anomaly condition (CA 6549)
- Direct plotting resistance over time (Rt) curves in display (CA 6549)
- Calculation of R at Reference Temperature (T°) (CA 6549)
- Memory: 128KB storage capacity
- Communication: USB (Two-Way)
- PC interface



Advanced 5kV Insulation Testers

MEASUREMENTS

- **Insulation**
Test Voltage (Fixed/Adjustable):
500 V, 1000 V, 2500 V, 5000 V
5000 V / 40 V to 5100 V in 10 V
or 100 V increments
Range: 10 kΩ to 10 TΩ
Accuracy: $\pm 5\%$ ± 3 pts
- **Voltage**
Range: Up to 5100 V
- **Leakage Current**
Range: Up to 3 mA
- **Capacitance**
Range: Up to 49.99 μ F

CA 6550 / CA 6555

SALIENT FEATURES

- Large graphical LCD display with backlight & bargraph
- Calculation of the DAR/PI/DD ratios
- Programmable test duration
- Timer (min:s): Up to 99:59
- Voltage ramp & step with "burn-in", "early break" & "limit" modes
- Memory: 80,000 points
- PC interface: USB



Ultra High Voltage Insulation Testers

MEASUREMENTS

- **Test Voltage / Insulation**
Range:
CA 6550: 500 V, 1000 V, 2500 V, 5000 V, 10,000 V / 10 kΩ to 25 TΩ
CA 6555: 500 V, 1000 V, 2500 V, 5000 V, 10,000 V, 15,000 V / 10 kΩ to 30 TΩ
Accuracy: $\pm 5\%$ ± 3 pts
- **Voltage**
Range: Up to 2500 V AC / Up to 4000 V DC
- **Leakage Current:**
Range: Up to 8 mA
- **Capacitance Range:** Up to 19.99 μ F

Turn complex signals into clear insights. Benzene Electricals offers a versatile range of Oscilloscopes with powerful waveform analysis, multi-channel measurement, and advanced diagnostic capabilities for professionals across electrical and electronic applications.

OX 5022 / OX 5042

SALIENT FEATURES

- Display: 3.5" colour TFT, 320 × 240, LED backlighting
- Bandwidth: 20 MHz (OX 5022) / 40 MHz (OX 5042)
- Channels: 2 isolated channels
- Input Impedance: 1 M Ω $\pm$ 0.5%
- File Storage: 2 MB
- Features: PC Interface, Screenshots, 2,500 Acquisition Points



Handheld Digital Oscilloscope

MEASUREMENTS

Multimeter Mode

- Channels: 2, 8,000-count display + min/max bargraph
- Recording: 2,700 measurements
- AC/DC/AC+DC Voltage: 600 mV to 600 VRMS, 800 mV to 800 VDC
- Resistance/Capacitance: 80 Ω to 32 M Ω / 5 nF to 5 mF
- Features: Frequency, Rotation Speed, 3.3 V Diode Test, Temperature

Harmonic Analyzer

- 2 channels, 31 orders
- Fundamental frequency: 40–450 Hz

OX 9062 / OX 9102 / OX 9104 / OX 9304

SALIENT FEATURES

- Display: 7" WVGA colour TFT LCD touchscreen, 800 × 480
- Bandwidth: 60 MHz / 100 MHz / 300 MHz
- Channels: 2 or 4 isolated channels
- Input Impedance: 1 M Ω $\pm$ 0.5%
- Memory: 2 GB
- Features: PC Interface, 2,500 Acquisition Points, 20 Automatic Measurements/Channel



Portable Digital Oscilloscope

MEASUREMENTS

Multimeter Mode

- Channels: 2 or 4, 8,000 counts
- Voltage: 600 mV to 600 VRMS, 800 mV to 800 VDC
- Resistance/Capacitance: 80 Ω to 32 M Ω / 5 nF to 5 mF
- Frequency: Up to 200 kHz
- Features: Rotation Speed, 3.3 V Diode Test, Temperature

Harmonic Analyzer

- 2 or 4 channels
- Harmonics: Up to 63 orders
- Fundamental Frequency: 40–450 Hz

Logger Mode

- Duration: 20,000 s
- Interval: 0.2 s
- Files: Up to 100,000 measurements

Ensure safe and reliable grounding with precision. Benzene Electricals offers a comprehensive range of Earth Testers, from compact resistance testers to advanced multi-function solutions for demanding electrical testing and maintenance.

CA 6424 2P/3P Earth Tester

SALIENT FEATURES

- Backlit custom 206-segment LCD
 - Auto Power off
 - Noise indication
- 
- Measurement Mode: V, I, R (2P), R (3P)



2P/3P Earth Tester

MEASUREMENTS

- **Voltage:** Up to 600 V
- **2P Earth Resistance/Accuracy:** 0.05 Ω to 50 k Ω / (2%R +1 count)
- **3P Earth Resistance/Accuracy:** 0.5 Ω –50.00 k Ω / (2%R +1 count)
- **RH Stake Resistance:** 0.05 Ω to 49.99 k Ω
- **U_e Voltage Measurement:** Up to 600 VAC
- **Leakage Current:** Up to 60.00 A

CA 6460/CA 6462 4P Earth Tester

SALIENT FEATURES

- Large backlit digital display with 2,000 counts
- 3 fault presence indicators to validate measurement
- Battery:
- CA 6460 – Non Rechargeable / Rechargeable Batteries
- CA 6462 – Rechargeable Batteries only



4P Earth Tester

MEASUREMENTS

3-in-1 Tester

- Resistivity: "Wenner method" (4-rod method)
- Ground Resistance: "TAGG method" (62% method)

Resistance

- Range: 0.01 Ω to 2,000 Ω (3 automatic ranges)
- Test current: 10mA, 1mA, 0.1mA
- Accuracy: $\pm 2\%$ ± 1 point
- Frequency: 128 Hz

Ensure safe and reliable grounding with precision. Benzene Electricals offers a comprehensive range of Earth Testers, from compact resistance testers to advanced multi-function solutions for demanding electrical testing and maintenance.

CA 6470N / CA 6471 3P/4P Earth Tester

SALIENT FEATURES

- Backlit LCD display featuring 3 simultaneous display levels
- Noise interference detection
- Alarm function
- Memory: 512 memory locations
- Communication: USB



MEASUREMENTS

- 4-in-1 Tester (CA 6470N):** Earth, Resistivity, Coupling, Continuity
- 5-in-1 Tester (CA 6471):**
 - Earth, Selective earth, Resistivity, Coupling, Continuity
- 3-pole, 4-pole measurements**
 - Range: 0.01 Ω to 99.9 k Ω
 - Frequency: 41 to 512 Hz
- Selective 4-pole measurements, 2 clamps (CA 6471)**
 - Range: 0.01 Ω to 500 Ω
 - Frequency: 128 Hz, 1367 Hz, 1611 Hz, 1758 Hz
- Resistivity**
 - Range: 0.01 Ω to 99.9 k Ω
 - Frequency: 128 Hz

CA 6474/CA 6472 3P/4P Earth Tester

SALIENT FEATURES

- Backlit LCD display featuring 3 simultaneous display levels
- Automatic & Expert mode
- Earth measurement on Pylons with earth cable (with CA 6474 option)
- Alarm function
- Memory: 512-record memory
- Communication: USB
- Measurement with CA 6474
- Range: 0.001 Ω to 99.9 k Ω
- Frequency: 41 to 5078 Hz



MEASUREMENTS

- 3P, 4P/4P Selective**
 - MethodRange: 0.01 Ω to 99.9 k Ω
 - Frequency: 41 to 5,078 Hz
- Earth Measurement (2 clamps)**
 - Range: 0.01 Ω to 500 Ω
 - Frequency: 1,367 Hz (auto) & 1,367 Hz, 1,611 Hz, 1,758 Hz (manual)
- Resistivity**
 - Range: 0.01 Ω to 99.9 k Ω
 - Frequency: 41 to 128 Hz
- Earth Potential**
 - Range: 0.01 mV to 65.00 V
 - Frequency: 41 to 128 Hz
- DC Resistance**
 - Range: 0.001 Ω to 99.9 k Ω

Earth Loop Testers

Detect grounding issues before they become electrical hazards. Benzene Electricals offers a versatile range of Earth Loop Testers, from compact clamp meters to advanced solutions for accurate loop resistance, current, and ground voltage measurements.

CA 6417

Clamp-On Earth Loop Tester

SALIENT FEATURES

- Ø35 mm clamping diameter
- Large, 152-segment multi-function OLED display
- Display Counts: 1,500 counts(Loop ohmmeter) / 4,000-count display (Ammeter)
- Alarms
- HOLD & PRE-HOLD
- Auto power off
- Memory: 2,000 measurements
- Communication: Bluetooth
- PC interface & Android app



MEASUREMENTS

Loop Resistance

- Range: Up to 1,500 Ω
- Accuracy: $\pm 1.5\% \pm 0.01$

Frequency

- 2,083 Hz (Measurement frequency)
- 50, 60, 128 or 2,083 Hz (Transposition freq.)

Loop Inductance

- Range: Up to 500 μH
- Accuracy: $\pm 3\% \pm r$

Ground Voltage: Up to 75 V

Current

- Range: Up to 39.99 A
- Accuracy: $\pm 2\% \pm r$

CA 6418

Advanced Clamp-On Earth Tester

SALIENT FEATURES

- Ø32/55 mm max. clamping diameter (Oblong head)
- Large, 152-segment multi-function OLED display
- Alarms
- Automatic calibration of the jaw gap
- HOLD: Manual or automatic PRE-Hold
- Auto power off
- Memory: 300 measurements (Time/date-stamped)



MEASUREMENTS

Loop Resistance

- Range: Up to 1,200 Ω
- Accuracy: $\pm (1.5\%R + 2r)$

Current

- Range: Up to 20 A
- Accuracy: $\pm (2\%R + 200\mu\text{A})$

Ground Voltage

- Range: Up to 75 V

Measure with confidence. Benzene Electricals offers a versatile range of Clamp Meters, from compact current testers to advanced solutions for precise electrical measurement, diagnostics, and maintenance.

F205/F404/F604 Power Clamp Meter

SALIENT FEATURES

- Clamping diameter F205: 34 mm
 - F404: 48 mm
 - F604: 60 mm
- Display
- F205: 6000 counts backlit LCD
- F404/F604: 10,000 counts backlit LCD
- Diode test (semiconductor function)
- Measures True Inrush, Min/Max, Peak+/Peak-
- Audible continuity (adjustable from 1 to 999 Ω)
- RFI elimination $\Delta X/\Delta X/\Delta X$ (%) measurement
- Auto range, Hold & auto power off
- Measures kW, kVAR, kVA & PF (F205)
 - IP rating F205: IP40
 - F404/F604: IP54



Power Clamp Meter

MEASUREMENTS

- Voltage V (AC/DC)** F205: Up to 1,200 V AC/DC
- F404 & F604: Up to 1,200 V AC / 1,700 V DC
- Current I (AC/DC)** F205: Up to 600 A AC 900 A DC
- F404: Up to 1,000 A AC / 1,500 A DC
 - F604: Up to 2,000 A AC / 3,000 A DC
 - Accuracy (V & I): $\pm 1\%$ of reading + 3 counts
 - Resistance: Up to 99.99 k Ω
 - Temperature: Up to 1000°C (F404 & F604)
- 1-phase & 3-phase power:** Up to 600 kW (F205)

F406/F606 Solar Clamp Meter

SALIENT FEATURES

- Specially designed for photovoltaic applications with 1700 V DC
- Clamping diameter
 - F406: 48 mm
 - F606: 60 mm
- Display: 10,000 counts backlit LCD
- Diode test (semiconductor function)
- Measures True Inrush, Min/Max, Peak+/Peak-
- Audible continuity (adjustable from 1 to 999 Ω)
- REL / ΔX / ΔX (%) measurement
- Auto range, Hold & Auto power off
- Measures kW, kVA, kVA & PF



Solar Clamp Meter

MEASUREMENTS

- Voltage V (AC/DC):** Up to 1,200A / 1,700 V DC
- Current I (AC/DC) F406: Up to 1,000 A AC / 1,500 A DC
 - F606: Up to 2,000 A AC / 3,000 A DC
- Accuracy (V & I): $\pm 1\%$ of reading + 3 counts
- Resistance:** Up to 99.99 k Ω
- 1-phase & 3-phase Power F406: Up to 1,200 kW
 - F606: Up to 2,400 kW
- Voltage & Current:** THDf / THDr

Measure with confidence. Benzene Electricals offers a versatile range of Clamp Meters, from compact current testers to advanced solutions for precise electrical measurement, diagnostics, and maintenance.

F407/F607 Power & Harmonics Clamp Meter

Power & Harmonics Clamp Meter

SALIENT FEATURES

- Clamping diameter
 - F407: 48 mm
 - F607: 60 mm
- Display: 10,000 counts backlit LCD
- Measures True Inrush, Min/Max, Peak+/Peak-
- Audible continuity (40 Ω)
- Auto range, Hold & Auto power off
- Measures kW, kVAr, kVA, PF & DPF
- Data recording & PC interface
- Communication: Bluetooth



MEASUREMENTS

- **Voltage V (AC/DC):** Up to 1,000 V
 - Current I (AC/DC) F407: Up to 1,000 A AC / 1,500 A DC
 - F607: Up to 2,000 A AC / 3,000 A DC
- **Accuracy (V & I):** $\pm 1\%$ of reading + 3 counts
- **Resistance:** Up to 99.99 k Ω
 - 1-phase & 3-phase Power F407: Up to 1,000 kW
 - F607: Up to 2,000 kW
 - Harmonic Analysis Voltage & Current THDf/THDr
 - Individual harmonics up to 25th order

Measure accurately. Diagnose confidently. Benzene Electricals offers a versatile range of Digital Multimeters, from compact portable testers to advanced TRMS instruments for precise electrical testing and professional maintenance.

MTX 203

SALIENT FEATURES

- Display: 6000 counts monochrome digital display with blue backlighting
- Audible continuity & Diode test
- VLow, HOLD, NCV
- Min, Max values
- IP 54



Basic Digital Multimeter

MEASUREMENTS

- **Voltage: V** (AC): 0.4 V to 600 V & 10 mV to 1000 V; V (AC/DC/AC+DC): 10 mV to 1000 V
- **Current: A** (AC): 2 mA to 10 A & 10 μ A to 10 A
- **Resistance:** Up to 40 M Ω
- **Capacitance:** Up to 100 mF
- **Temperature:** Up to 1,200°C

DMM 210 / DMM 220 / DMM 230

SALIENT FEATURES

- Display: 6,000 counts backlit with bargraph
- Measurement Type: Average (DMM 210 & DMM 220), TRMS (DMM 230)
- Calibre Selection: Autorange/Manual
- Audible continuity & Diode test
- Automatic shutdown (deactivatable)
- Relative mode – MIN, MAX
- IP 67



Standard Digital Multimeter

MEASUREMENTS

- **Voltage:** V(AC): 6 V to 1000 V; V(DC): 600 mV to 1000 V
- AC Bandwidth: Up to 1 kHz
- **Current: A** (AC/DC): 600 μ A to 10 A
- **Resistance:** 600 Ω to 60 M Ω
- **Frequency:** Up to 10 MHz
- **Capacitance:** Up to 1000 μ F
- **Temperature:** Up to 750°C (DMM 220 & DMM 230)

DMM 240

SALIENT FEATURES

- Display: 40,000 counts backlit with bargraph
- Measurement Type: TRMS
- Calibre Selection: Autorange/Manual
- Audible continuity & Diode test
- Automatic shutdown (deactivatable)
- Relative mode – MIN, MAX, PEAK (1 ms)
- IP 67



Advanced Digital Multimeter

MEASUREMENTS

- **Voltage:** V(AC/DC): 400 mV to 1000 V
- **AC Bandwidth:** Up to 1 kHz
- **Current: A** (AC/DC): 400 μ A to 10 A
- **Resistance:** 400 Ω to 40 M Ω
- **Frequency:** Up to 100 MHz
- **Capacitance:** Up to 40 mF
- **Temperature:** Up to 1000°C

Measure accurately. Diagnose confidently. Benzene Electricals offers a versatile range of Digital Multimeters, from compact portable testers to advanced TRMS instruments for precise electrical testing and professional maintenance.

CA 5273 / CA 5275 / CA 5277

SALIENT FEATURES

- Display: 2 × 6,000 counts with backlighting & bargraph
- Autorange/Deactivatable
- Automatic AC/DC detection (CA 5273)
- Audible continuity & Diode test
- Differential ΔX /RELATIVE ($\Delta X/\%$) measurement (CA 5273)
- 1 ms Peak+/Peak values (CA 5277)
- Hold
- IP 54



CA Advanced Series Multimeter

MEASUREMENTS

- **Voltage:** V(AC/DC): 600 mV to 1000 V; V(AC/DC/AC+DC): 60 mV to 1000 V
- **AC Bandwidth:** Up to 3 kHz (CA 5273) & 10 kHz (CA 5275 & CA 5277)
- **Current:** A(AC/DC): 20 mA to 10 A (CA 5273); A(AC/DC/AC+DC): 60 μ A to 10 A (CA 5275 & CA 5277)
- **Resistance:** Up to 60 M Ω
- **Frequency:** Up to 50 kHz
- **Capacitance:** Up to 60 mF
- **Temperature:** Up to 1,200°C (CA 5273 & CA 5277)

MTX 3291

SALIENT FEATURES

- Display: 60,000 counts backlit digital monochrome
- TRMS value
- Audible continuity detection (600 Ω SIGNAL <30 Ω <5 V)
- Diode test
- HOLD/Auto-HOLD
- Communication: USB
- PC interface
- IP 67



High Resolution Multimeter

MEASUREMENTS

- **Voltage:** V(AC): 6 V to 1000 V; V(DC): 600 mV to 1000 V
- **AC Bandwidth:** Up to 1 kHz
- **Current: A (AC/DC):** 600 μ A to 10 A
- **Resistance:** 600 Ω to 60 M Ω
- **Frequency:** Up to 10 MHz
- **Capacitance:** Up to 1000 μ F
- **Temperature:** Up to 750°C (DMM 220 & DMM 230)

Measure accurately. Diagnose confidently. Benzene Electricals offers a versatile range of Digital Multimeters, from compact portable testers to advanced TRMS instruments for precise electrical testing and professional maintenance.

CA 5292 / CA 5293

SALIENT FEATURES

- Display: 4 × 100,000 count colour graphical with backlighting
- TRMS value
- Audible continuity detection ($1000\ \Omega$ / SIGNAL $<20\ \Omega$ $<3.5\ \text{V}$) & Diode test
- Display of trends, multiple parameters & 600 Hz waveform
- HOLD/Auto-HOLD
- Memory:
- CA 5292: 10,000 measurements
- CA 5293: 30,000 measurements
- Communication: USB, Bluetooth (optional)
- PC interface
- IP 67



Professional Digital Multimeter

MEASUREMENTS

- **Voltage:** V(AC/DC/AC+DC): Up to 1000 V
 - V DC: 0.03% (CA 5292) & 0.02% (CA 5293)
 - V AC: 0.3%
- **AC & AC+DC Bandwidth:** Up to 100 kHz (CA 5292) & 200 kHz (CA 5293)
- **Current:** A(AC/DC/AC+DC): Up to 20 A
- **Accuracy:** 0.08% (DC) / 0.4% (AC/AC+DC)
- **AC & AC+DC Bandwidth:** 50 kHz
- **Frequency:** Up to 5 MHz
- **Resistance:** Up to 100 M Ω
- **Capacitance:** Up to 10 mF
- **Temperature:** Up to 1200°C (with K thermocouple)

F65

SALIENT FEATURES

- Clamping diameter: 28 mm
- Display: 10,000 counts backlit LCD
- Hold & Auto power off
- Audible Continuity (Buzzer $<35\ \Omega$)
- Complied IEC 61557-13 standard



RMS Leakage Current Clamp

MEASUREMENTS

- **AC Current:**
 - Range: 60 mA to 100 A
 - Accuracy: 1.2% ± 5 cts
- **Voltage (AC/DC):** 600 V
- **Resistance & Continuity:** at 1 k Ω
- **Frequency:** 5 Hz to 1 kHz

Small resistance. Big impact. Benzene Electricals offers precision Micro-Ohmmeters that help detect hidden connection faults and ensure reliable performance across critical electrical systems.

CA 6240 / CA 6255 10 A Micro-Ohmmeters

SALIENT FEATURES

- Large backlit LCD display
- Auto measurement mode
- Automatic "on the fly" or manual recording mode
- Auto power-off
- Automatic discharge (CA 6255)
 - Memory CA 6240: 100 measurements
 - CA 6255: 1,500 measurements
 - Communication Optical/USB link (CA 6240)
 - RS 232 link (CA 6255)
- PC interface



10A Micro-Ohmmeter

MEASUREMENTS

- **Resistance**
 - CA 6240: 5 $\mu\Omega$ to 399.9 Ω
 - CA 6255: 5 m Ω to 2,500 Ω
- **Accuracy:** $\pm 0.25\% \pm 2$ counts
- **Test current Range:** Up to 10 A



CA 6292 200 A Micro-Ohmmeters

SALIENT FEATURES

- Display: Backlit LCD screen (4 lines of 20 characters)
- Internal cooling system
- Test mode: Normal or BSG (Both Sides Grounded)
- Memory: 8,000 measurements
- Communication: USB
- PC interface
- Protection: Voltage surges, short circuits, overheating, and overvoltages on the output terminals



200A High-Current Micro-Ohmmeter

MEASUREMENTS

- **Resistance**
 - Range: 0.1 $\mu\Omega$ to 1 Ω
 - Accuracy: $\pm 1\%$
- **Test Current**
 - Range: Up to 200 A
- **Current (Optional MR6292 Clamp – BSG Mode)**
 - Range: Up to 50 A

Ensure every installation is safe and reliable. Benzene Electricals offers a versatile range of Installation Testers, from compact multifunction testers to advanced solutions for comprehensive electrical safety testing, diagnostics, and verification.

CA 6117

Advanced Installation Tester

SALIENT FEATURES

- Display: Large 5.7" backlit graphic colour LCD screen, 320 × 240 points
- All-in-one instrument for testing electrical installations, compliant with international standards (IEC 60364-6, NFC 15-100, VDE 100, FD C 16-600, etc.), combining design, simplicity, performance, and precision
- Suitable for all neutral systems (TT, TN, IT) and ideal for industries, tertiary, and residential sectors
- Integrated fuse table for quick reading of results on the instrument
- Li-ion battery for longer battery life
- Measurement of voltage drop for correct sizing of conductor diameters
- Loop measurement with 1 mΩ resolution
- Continuity measurements at 12 mA or 200 mA
- Memory: 3-level storage, 1,000 locations to record
- PC interface



MEASUREMENTS

Insulation

- Test Voltage: 50 / 100 / 250 / 500 / 1,000 V DC
 - Range: 0.01 MΩ to 2 GΩ
- **Earth Resistance:** Up to 40 Ω (3-Pole) & 399.9 Ω (1P selective earth)
- RCD: AC, A and F-type RCDs, B, B+ & EV-type
- **Loop Impedance:** Zs (L-PE) and Zi (L-N or L-L) — Selective earth measurements
- **Voltage:** 550 VAC/DC
- **Current:** 199.9 A
- **Frequency:** 500 Hz
- **Phase Rotation:** 20 to 500 VAC
- **Active Power:** Up to 110 kW (1 phase) & 330 kW (3 phase)
- **Harmonics:** Up to 50th order

CA 6133

Standard Installation Tester

SALIENT FEATURES

- Display: Custom 231-segment LCD with blue backlighting
- Continuity measurement at 0.2 A (200 mA)
- Android application for report generation
- Earth measurement by stake and loop methods
- Insulation testing
- RCD testing: current and trip time
- Automatic test sequences
- Power supply by mains, rechargeable batteries, USB socket or vehicle cigarette lighter
- Memory: 30 sites × 99 tests



MEASUREMENTS

Insulation

- Test Voltage: 250 V / 500 V / 1,000 V
 - Range: 0.01 to 999.9 MΩ
- **Earth Resistance:** Up to 2,000 Ω (3P method)
- RCD Test: Type AC & RCDs: 30 mA, 100 mA, 500 mA, 650 mA
- **Loop Impedance:** Earth loop (Zs), Fault loop (Zi) measurements
- **Voltage:** Up to 550 VAC & 800.0 VDC
- **Current:** Up to 200 A
- **Frequency:** Up to 999.9 Hz
- **Phase Rotation:** 45 to 550 V

Measure more. Monitor smarter. Manage better. Benzene Electricals offers a versatile range of Multifunction Meters designed for accurate electrical monitoring, energy management, and reliable power performance.

DiGi 530S / DiGi 530H

Standard Multi Function Meter

SALIENT FEATURES

- Accuracy Class 0.5s as per IEC 62053-22
- 3-line bright LCD display
- PT & CT programmable
- Password protection for setup page
- Load management feature
- RS485 port with Modbus RTU protocol and baud rate up to 38,400 bps
- Dimension: 96mm × 96mm × 83mm
- Cut-out: 90 × 90 mm (+/- 0.5mm)



MEASUREMENTS

- RMS – V, U, I, In, Hz
- Power – kW, kVA, kVAr
- PF – Phase wise & Total
- Min, Max – V, I, Hz, kW
- Bi-directional energy measurements
- Energy – kWh, kVAh, kVArh
- THD – Voltage & Current
- Individual Harmonics upto 31st order (DiGi 530H)
- Demand – I, kW, kVA, kVAr (DiGi 530H)

DiGi 630S / DiGi 630D

Advanced Multi Function Meter

SALIENT FEATURES

- Accuracy Class 0.5s / Class 0.2s as per IEC 62053-22
- 3-line bright LCD display
- PT & CT programmable
- Password protection for setup page
- 4 DI, 2 DO (DiGi 630D)
- Energy recording for energy accounting
- RS485 port with Modbus RTU protocol and baud rate upto 38,400 bps
- Modbus custom table
- Dimension: 96mm × 96mm × 83mm
- Cut-out: 90 × 90 mm (+/- 0.5mm)



MEASUREMENTS

- RMS – V, U, I, In, Hz
- Power (kW, kVA, kVAr, PF) – Phase wise & Total
- Min, Max – V, I, Hz (Real time stamping)
- Bi-directional, 4 Quadrant energy
- Dual Source energy meter
- Energy – kWh, kVAh, kVArh
- Tariff energy recording
- THD – Voltage & Current
- Individual Harmonics upto 31st order
- Demand – I, kW, kVA, kVAr
- Demand control available in DiGi 630D
- Load management feature

Measure more. Monitor smarter. Manage better. Benzene Electricals offers a versatile range of Multifunction Meters designed for accurate electrical monitoring, energy management, and reliable power performance.

DiGi 730S / DiGi 730D

Premium Multi Function Meter

SALIENT FEATURES

- Accuracy Class 0.5s / class 0.2s as per IEC 62053-22
- 3-line bright LCD display
- PT & CT programmable
- Password protection for setup page
- Load management feature
- 6 Digital inputs
- 3DO & 1 AO (only in DiGi 730D)
- Screen shot recording for energy accounting
- RS485 port with Modbus RTU protocol and baud rate upto 115,200 bps for faster communication
- Modbus custom table
- Dimension: 96mm × 96mm × 83mm
- Cut-out: 90 × 90 mm (+/- 0.5mm)



MEASUREMENTS

- RMS – V, U, I, In, Hz
- Power (kW, kVA, kVAR, PF) – Phase wise & Total
- Min, Max – V, I, Hz (kW real time stamping)
- Bi-directional, 4-Quadrant energy
- Dual Source energy meter
- Tariff Energy Recording (6 rates)
- Energy – kWh, kVAh, kVARh
- THD – Voltage & Current
- Individual Harmonics upto 51st order
- Measures Crest factor and K factor
- Demand monitoring – I, kW, kVA, kVAR
- Demand control available in DiGi 730D

DiGi 760

High Precision Meter

SALIENT FEATURES

- Accuracy Class 0.2s as per IEC 62053-22
- TFT colour LCD display with 320 × 240 resolution
- Real Time waveform Display
- CT/PT Programmable
- Real-time dock for Min, Max, Time stamping
- Voltage swell/sag event recording with waveform
- Voltage input upto 480V
- RS485, 3DI (Optional)
- Ethernet Port with Modbus TCP/IP protocol
- Modbus RS485 communication
- Dimension: 96 × 96 × 66mm
- Cut-out: 90 × 90 mm (+/-0.5mm)



MEASUREMENTS

- RMS – V, U, I, In, Hz
- Voltage – 3U, 3V, Current – 3I, In
- Powers – kW, kVA, kVAR – phase wise and total
- Bi-directional energy measurements
- 4-Quadrant Energy Data (on communication)
- Energy – kWh, kVAh, kVARh
- THD – Voltage & Current
- Individual harmonics on V & I upto 63rd order
- K-Factor, Crest Factor measurements
- ToU – 2 Tariff rates, 8 periods & 2 lists of tariff rate
- Demand – I, kW, kVA, kVAR

Multi Function Meters



Measure more. Monitor smarter. Manage better. Benzene Electricals offers a versatile range of Multifunction Meters designed for accurate electrical monitoring, energy management, and reliable power performance.

DiGi 820

SALIENT FEATURES

- IEC 61000-4-30 Class A power quality monitoring meter
- Class 0.2s high accuracy energy measurement
- Sampling rate 24 samples/cycle
- Color LCD display with resolution of 640 × 480
- Real-Time waveform display
- Power quality analysis – sag, swell, Transient, RC
- 8DI, 2DO (Pulse) & 4 Relay
- Baud rate: 2400–38400bps
- Ethernet Port with Modbus TCP/IP protocol
- Modbus RS485 communication
- Memory: 8GB for data and event recording



Class A Power Quality Analyzer MEASUREMENTS

- RMS – V, U, I, In, Hz
- Voltage: Phase, Line, Average & Phase Angle
- Current: Phase, Average Current & Phase Angle
- Power (kW, kVA, kVAr) & PF: Phase & Total Power
- 4-Quadrant energy measurements
- Harmonics & Inter-harmonics upto 63rd order and Harmonic energy upto 31st order
- Records 256 PQ events along with waveform
- Captures 20s PQ voltage transients
- Multi-tariff energy: 4 tariff, 8 time period, 2 time zone
- Demand monitoring & control: I, kW, kVAr & kVA

Multy4

SALIENT FEATURES

- Backlit custom LCD display
- Accuracy Class 1.0 as per IEC 62053-21
- Accuracy includes CT errors
- Voltage input upto 500 V
- CT primary programmable 2kV isolation
- Password protection
- Load management module (on communication)
- Special high-accuracy CT supplied with the meter
- RS485-Modbus RTU Protocol
- 75mm (width) × 94mm (height) × 62mm (depth)



Multi-Channel Meter

MEASUREMENTS

- Single phase/Three phase:
 - 12 × 1 phase / 4 × 3 phase
- Common for 4-channels:
 - Voltages L-N and L-L (L-C) & Frequency
 - Voltage Min and Max L-N and L-L (L-C)
- For each of the 4 channels:
 - Currents: I line
 - Max. Current & Phase-wise (I)
 - kW, kVAr, kVA & PF – Phase and Total
 - kWh, kVAh – Phase and Total



Acrasia Private Limited

Precision • Reliability • Performance

Multi Function Meters



Measure more. Monitor smarter. Manage better. Benzene Electricals offers a versatile range of Multifunction Meters designed for accurate electrical monitoring, energy management, and reliable power performance.

PLM R90

SALIENT FEATURES

- 35mm DIN rail installing, standard DIN ED5002
- Accuracy: Class 0.5s
- LED indicates pulse output
- RS485 port, Modbus-RTU or DL/T645 protocol (Optional)
- Dimension: 100 × 36 × 65mm (2 module)



DC Energy Meter

MEASUREMENTS

- RMS – V, I
- Power – kW
- Energy – kWh
- Shunt: 100A, 200A, 300A

PLM R91

SALIENT FEATURES

- 35mm DIN installing in accordance with the standard DIN EN 50022
- Active energy accuracy upto Class 1.0 as per IEC 62053-21
- 6+1 digit LCD display (999999.9 kWh)
- Passive pulse O/p, O/p signal in accordance with the standard DIN43864
- LED indicates pulse O/p
- RS485 port, Modbus-RTU or DLT645 (optional)
- Dimension: 100 × 36 × 65mm



AC Energy Meter

MEASUREMENTS

- RMS – V, I, Hz
- Power – kW, kVAR, kVA, PF
- Energy – kWh, kVAh
- Max. rate of current 63A

PLM R93

SALIENT FEATURES

- 35mm DIN in accordance with the standard ED5002
- 1.0 class as per IEC 62053-21
- 7+1 digit LCD display (9999999.9 kWh)
- 2 LED Pulse indicators for kWh & kVAh
- Displays four phase sequence error indication
- RS485 port with Modbus-RTU protocol and baud rate of 2400, 4800, 9600
- Dimension: 72 × 100 × 65mm
- Cut-Out: 50 × 50mm



3-Phase Energy Meter

MEASUREMENTS

- RMS – V, I, Hz
- Power – kW, kVAR, kVA, PF
- Bidirectional energy measurement
- Energy – kWh, kVAh
- Max. rate of current 63A
- Multi tariff energy values
- kVAR & kVA available on communication
- Records historical data of Present day data (15 mins), Last 31 days, Last 12 months, Last 10 years

Measure more. Monitor smarter. Manage better. Benzene Electricals offers a versatile range of Multifunction Meters designed for accurate electrical monitoring, energy management, and reliable power performance.

EON 4.0

SALIENT FEATURES

- Active energy accuracy upto Class 0.5
- PT/CT programmable
- Password protection for setup page
- Auto Phase sequence adjustment
- 2 DI Standard, 2 DO (optional)
- Baud rate: 4800 to 38400bps
- Memory: Built in memory, 7 days data storage for 5 mins data (EON 4.0 & EON 4.0E)
- Gateway function (EON 4.0G & EON 4.0E)
- Communication:
 - EON 4.0S: RS 485 Modbus-RTU protocol
 - EON 4.0G: 4G wireless for MQTT
 - EON 4.0E: LAN RJ45 LAN port for Modbus TCP/HTTP/MQTT



Advanced Energy Meter

MEASUREMENTS

- RMS – V, I, Hz, V & I phase angle
- Power – kW, kVA, kVAR & PF
- Bidirectional energy
- Energy – kWh, kVAh, kVARh
- Unbalance – V & I
- Individual Harmonics upto 63rd order
- Demand: I, kW & kVA
- Latest 10 years, 12 months, 31 days historical energy
- Remote configuration
- 10 secs battery backup to capture Power interruption event



Put your power systems to the test. Benzene Electricals delivers high-capacity, customized Load Banks from 10 kW to 2000 kW, built for dependable performance testing of Gensets, UPS, Inverters, Batteries, and critical power infrastructure.

LOAD BANK

10 KW – 2000KW

Salient Features:

- AC/DC, Resistive/Inductive/Capacitive
- Remote monitoring SCADA with data logging
- Automatic PLC based and manual control
- PLC based auto load cycle
- Protections for abnormal Voltage, Current,
- Load, Temperature etc.
- Suitable for Outdoor also
- Containerized
- Manufactured as per customer's requirements
- LT or HT voltages




- High Accuracy
- Very Fine Steps
- Continuous Duty
- Forced Cooling
- Acoustic Enclosures
- AL/CU Bus bars
- HMI with touch screen display

Put your power systems to the test. Benzene Electricals delivers high-capacity, customized Load Banks from 10 kW to 2000 kW, built for dependable performance testing of Gensets, UPS, Inverters, Batteries, and critical power infrastructure.

LOAD BANK

10 KW – 2000KW

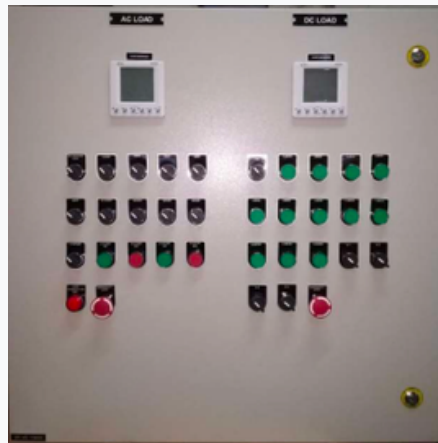

These are AC & DC combined load bank with remote control panel.



Below is 250 KW inductive (0.8 PF) load bank.

SOME OF OUR ESTEEMED CUSTOMERS



Reliable
Solutions
for a Brighter
Tomorrow



PRECISION
RELIABILITY
PERFORMANCE

BENZENE

ELECTRICALS

— TESTING EQUIPMENTS —

PRECISION • RELIABILITY • PERFORMANCE

Empowering Industries with Reliable Testing Solutions

From power generation to critical infrastructure, we deliver high-precision testing equipments that ensure safety, efficiency and uninterrupted performance across industries.

OUR COMPLIANCE & STANDARDS



ISO 9001:2015
Certified



मानक: पद्यप्रदर्शक:
BIS
Certified



RoHS
Compliant

CONTACT US



Office Address

202 Yashodha Nilayam, 4th cross sri sai layout
Katgengalli Yelahanka, Bengaluru 560064
Karnataka, India



Phone

8123081712



Email

sheefa@acrasia.in

POWERING
A SAFER
MORE RESILIENT
TOMORROW

TEST
ANALYZE
OPTIMIZE
PERFORM

ACROSS
INDUSTRIES
FOR A
SUSTAINABLE
FUTURE

INDUSTRY SEGMENTS WE SERVE



Manufacturing
& Steel



Oil, Gas &
Mining



Construction
& EPC



Power
Generation



Data Centers
& IT



Telecommunications



A Subsidiary of Acrasia Private Limited
PRECISION • RELIABILITY • PERFORMANCE

PEOPLE
TECHNOLOGY
A SAFER
TOMORROW