



KRYKARD®

ONE STOP SHOP FOR PORTABLE TEST & MEASUREMENT INSTRUMENTS



OUR WIDE RANGE OF SOLUTIONS

MEASURE



- Power Quality Analysers
- Thermal Imagers
- Insulation Testers
- Oscilloscopes
- Earth Testers
- Clamp Meters
- Digital Multimeters
- Micro-ohmmeters

PROTECT



- Servo Stabilisers
- Static Voltage Regulators
- Isolation Transformers
- Online UPS

CONSERVE

- Enterprise EnMS
- WAGES
- Utility Monitoring
- ISO 50001
- PQ Management Solutions

- Multi-Utility Billing
- User Portal
- Mobile App
- Tenant & Area Management



- Production Management
- Quality Management
- Asset Performance
- Process Control
- Operator Productivity

- GHG Protocol-Scope 1, 2, & 3 Emissions
- GRI/CSRD/BRSR Compliance

TABLE OF CONTENTS

1

INTRODUCTION

About us

1

2

POWER QUALITY ANALYZERS

ALM 20/ALM 31/ALM 36

2

CA 8345 Class A

3

CT Specifications (suitable for ALM XX series)

3

THERMAL IMAGERS

MA 250/E050/TC S030/TC S240

4

TC 2150/TC 2250/TC 3151/TC 3250

5

TC 3360/TC 3660/TC P360

6

TC 4360/TC 4460/TC 4460 H/TC 4660/TC 4660 H

7

TCC 7460/TC 742K/TCC 7660/TCC 762K/TCC 812K

8

Specifications

9

4

INSULATION TESTERS

CA 6522/CA 6528/CA 6524/CA 6526/CA 6532/CA 6534/CA 6536

12

CA 6505/CA 6545/CA 6547/CA 6549/CA 6550/CA 6555

13

5

OSCILLOSCOPES

OX 5022/OX 5042/OX 9062/OX 9102/OX 9104/OX 9304

14

6

EARTH TESTERS

CA 6424/CA 6460/CA 6462/CA 6470N/CA 6471

15

CA 6472/6474

16

7

EARTH LOOP TESTERS

CA 6417/CA 6418

16

8

CLAMP METERS

F205/F404/F604/F406/F606/F407/F607

17

TABLE OF CONTENTS

9

DIGITAL MULTIMETERS

MTX 203/DMM 210/DMM 220/DMM 230/DMM 240	18
CA 5273/CA 5275/CA 5277/MTX 3291	19
CA 5292/CA 5293 F65-RMS Leakage Current clamp	20

10

MICRO-OHMMETERS

CA 6240/CA 6255/CA 6292	21
-------------------------	----

11

INSTALLATION TESTERS

CA 6117/CA 6133	22
-----------------	----

12

MULTI FUNCTIONAL METERS

DiGi 530S/DiGi 530H/DiGi 630S/DiGi 630D/DiGi 730S/DiGi 730D	23
DiGi 760/DiGi 820/Multy4 (AC Muti-Channel Energy Meter)	24
PLM R90 (1P DC Energy Meter) PLM R91 (1P Energy Meter) PLM R93 (3P Energy Meter) EON 4.0	25

13

SALES & SERVICE

Alensoft	26
Our Clients	27
KRYKARD Care	28

ABOUT US

Atandra Energy Pvt. Ltd., headquartered in Chennai, draws upon a rich foundation of more than 39 years of expertise in the realm of Power & Energy Management.

We offer solutions to industrial & commercial establishments under our popular br& KRYKARD. With over 5,00,000 installations of Power Conditioners & over 1,50,000 installations of Portable & Panel Load Managers, KRYKARD is one of the leading br&s in Power Conditioning & Energy Management.

Our Servo Stabilizers & Transformers have obtained CE certification, providing our customers with the assurance that these products adhere to rigorous global health, safety, & environmental protection standards.

We have the following facilities:

- R&D department for Power Electronics & Electro-magnetics.
- Software Development department for energy management software & Industry 4.0 solutions.

Our organization has the following certifications:
ISO 9001:2015 | 14001 – 2015 | 45001 – 2018 | 50001

State-of-the-art facilities empower us to address the requirements of Indian industries comprehensively, effectively & efficiently, ensuring they derive maximum benefits from the power conditioning & energy management solutions we provide.

With a taskforce of around 450 employees & an extensive network of sales & service branches nationwide, we are well-equipped to seamlessly reach out to our customers & fulfil their needs.



100+ SERVICE CENTERS



PREFERRED SUPPLIER OF LARGE CORPORATES & OEM'S



CE CERTIFIED PRODUCTS




39 YEARS EXPERIENCE

OUR NETWORK



OUR JOURNEY

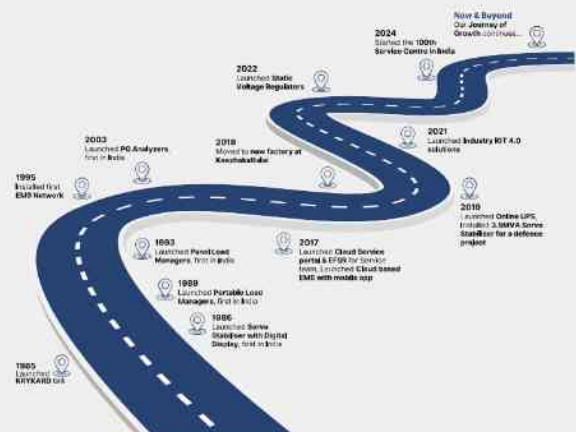

POWER QUALITY ANALYZERS

- 3 Voltage & 3 current Channels (neutral current calculated)
- Network Frequencies : 50 Hz, 60 Hz & 400 Hz (ideal for defense applications)
- 128 samples/cycle
- Quadruple backlit digital display
- Self-powered, via the phase
- Few weeks of measurement recording
- Recording: 1 sec, 1 min to 60 mins
- PC interface & Android application

ALM 20



- AC/DC Voltage : Upto 1,000 V Ph-N & 2,000 V Ph-Ph
- Power Measurements : kW, kVAR, kVA, PF & DPF
- Energy Measurements : kWh, kVARh (4 Quadrant), kVAh
- Crest factor & phase unbalance measurement
- THD (V, I) & Individual Harmonics : Upto 50th order

- 3 Voltage & 3 current Channels
- 5.7" color ¼ VGA TFT screen display
- Displays real time waveform
- Few hours/Weeks of measurement recording
- Recording Intervals : 1s, 5s, 20s, 1m, 2m, 5m, 10m, 15m
- PC interface
- Battery backup upto 13 hours

ALM 31



- AC/DC Voltage : Upto 1,000 V Ph-N & 2,000 V Ph-Ph
- Power Measurements : kW, kVAR, kVA, PF & DPF
- Energy Measurements : kWh, kVARh (4 Quadrant), kVAh
- Crest factor, K-factor & phase unbalance measurement
- THD (V,I) & Individual Harmonics : Upto 50th order
- Short flicker measurement (Pst)

- Complied with IEC 61000-4-30 Class B measurements
- 4 Voltage & 4 Current Channels
- 5.7" Color ¼ VGA TFT screen display
- Displays real time waveform
- Memory upto 2 GB
- Recording Intervals : 1s, 5s, 20s, 1m, 2m, 5m, 10m, 15m
- PC interface
- Alarms 10,000 of 40 conditions
- Battery backup upto 13 hours

ALM 36



- AC/DC voltage : Upto 1,000 V Ph-N & 2,000 V Ph-Ph
- Power Measurements : kW, kVAR, kVA, PF & DPF
- Energy Measurements : kWh, kVARh (4 Quadrant), kVAh
- Crest factor, K factor & phase unbalance, dip measurements
- Transients (Upto 210 counts) & TrueInrush (over a period of 10 minutes) function
- THD (V,I) & Individual Harmonics : Upto 50th order
- (Pst) Short & (Plt) Long term flicker measurements

POWER QUALITY ANALYZERS

- IEC 61000-4-30 Class A Ed 3.0 certified
- 4 Voltage & 4 Current Channels
- 512 samples/cycle
- 7" color LCD touch screen (WVGA)
- Memory upto 64 GB
- Trend Recording Period : 200ms to 2hrs
- PC interface
- Alarms 16,362 , of 40 conditions
- Battery backup upto 10 hours

CA 8345 CLASS A



- AC/DC Voltage : Upto 1,000V Ph-N & 2,000V Ph-Ph
- Power Measurements : kW, kVAh, kVA, PF & DPF
- Energy Measurements : kWh, kVAh (4 Quadrant), kVAh
- THD (V,I), Crest factor, K-factor, phase unbalance, dip measurement
- Harmonics : Upto 127th order
- Interharmonics : Upto 126th order
- 2.5 μ s transients capture & Truerrush (over a period of 10 minutes) function
- (Pst) Short & (Plt) Long term flicker measurements

CT SPECIFICATIONS (SUITABLE FOR ALM XX SERIES)

MEASUREMENTS AND FEATURES						
Specifications	Ampflex A193 450 mm	Ampflex A193 800 mm	MN 93A	PAC 93	C 193	J 93
Dia (mm)	140	250	20	39	52	72
Maximum Current	10,000 Aac	10,000 Aac	Dual range 5 Aac & 100 Aac	1,000 Aac/1,300 Adc	1,000 Aac	3,500 Aac / 5,000 Adc
Range	100 mA to 10,000 Aac		5 mA to 5 Aac / 100 mA to 100 Aac	1 A to 1,000 Aac / 1 A to 1,300 Adc	1 A to 1,000 Aac	50 A to 3,500 Aac / 50 A to 5,000 Adc
Accuracy	±2%	±2%	±0.7%	±3%	±0.2%	±1%
Safety	CAT IV 600 V/CAT III 1000 V		CAT IV 300 V/CAT III 600 V		CAT IV 600 V	CAT IV 300 V / CAT III 600 V

DATAVIEW FOR KRYKARD POWER QUALITY ANALYSER ALM XX

- Recovery of the measurement data
- Stored in the instrument
- Backup of measurement files
- Opening of backup files

- Processing & creation of reports
- Export into Excel spreadsheets
- Export in pdf format
- Database management



THERMAL IMAGERS

- IR Resolution : 256 × 192 (49,152 pixels)
- SuperIR Resolution : Yes, on captured images & live view
- Temperature Range : -20°C to 400°C
- Accuracy : ±2°C, ±2%
- Field of View (FOV) : 50° × 37.2°
- NETD : < 40 mK



- Focus : Fixed & minimum distance 0.2m
- Image Frequency : 50 Hz
- Image Modes : Thermal/PIP
- Communication Interface :
USB-C Android, USB-C iOS, Lightning iOS
(Includes a Lightning to USB-C adapter)

- IR Resolution : 96 × 96 (9,216 pixels)
- SuperIR Resolution : 240 × 240
- Temperature Range : -20°C to 550°C
- Accuracy : ±2°C, ±2%
- Field of View (FOV) : 50° × 50°
- NETD : < 50 mK
- Focus : Fixed & minimum distance of 0.1m
- Image Frequency : 25 Hz



- Image Modes : Thermal/Visual/Fusion
- Visual Camera : 640 × 480 (0.3 MP)
- Display : 240 × 320 Resolution,
2.4" LCD Screen
- Battery Backup : Approximately
8 hours (Built-in)
- Memory : Built-in 4GB flash memory
(30,000 images)

- IR Resolution : 96 × 96 (9,216 pixels)
- SuperIR Resolution : Yes, on captured images & live view
- Temperature Range : -20°C to 350°C
- Accuracy : ±2°C, ±2%
- Field of View (FOV) : 50° × 50°
- NETD : < 50 mK
- Focus : Fixed Focus & minimum focus of 0.1m
- Image Frequency : 25 Hz



- Image Modes :
Thermal/Visual/Fusion/PIP/Blending
- Visual Camera : 640 × 480 (0.3 MP)
- Display : 320 × 240 Resolution,
3.5" LCD touch screen
- Battery Backup : Approximately 4 hours
(Built-in)
- Memory : Built-in 4GB
(30,000 Images & 20 hours Video)

- IR Resolution : 256 × 192 (49,152 pixels)
- SuperIR Resolution : Yes, on captured images & live view
- Temperature Range : -20°C to 400°C
- Accuracy : ±2°C, ±2%
- Field of View (FOV) : 50° × 37.2°
- NETD : < 40 mK
- Focus : Fixed & minimum distance 0.3m
- Image Frequency : 25 Hz



- Image Modes :
Thermal/Visual/Fusion/PIP/Blending
- Visual Camera : 3264 × 2448 (8 MP)
- Display : 640 × 480 Resolution,
3.5" LCD touch screen with auto-rotation
- Battery Backup : Approximately
4 hours (Built-in)
- Memory : Built-in 16 GB
(60,000 Images & 54 hours Video)

THERMAL IMAGERS

- IR Resolution : 192 × 144 (27,648 pixels)
- SuperIR Resolution : Yes, on captured images & live view
- Temperature Range : -20°C to 550°C
- Accuracy : ±2°C, ±2%
- Field of View (FOV) : 27.8° × 37.2°
- NETD : < 40 mK
- Focus : Fixed & minimum distance 0.3m
- Image Frequency : 25 Hz



- Image Modes : Thermal/Visual/Fusion/PIP
- Visual Camera : 1600 × 1200 (2 MP)
- Display : 240 × 320 Resolution, 3.2" LCD screen
- Battery Backup : Approximately 6 hours (Built-in)
- Memory : Built-in 16 GB (90,000 Images)

- IR Resolution : 256 × 192 (49,152 pixels)
- SuperIR Resolution : Yes, on captured images & live view
- Temperature Range : -20°C to 550°C
- Accuracy : ±2°C, ±2%
- Field of View (FOV) : 37.2° × 50.0°
- NETD : < 40 mK
- Focus : Fixed & minimum distance 0.3m
- Image Frequency : 25 Hz



- Image Modes : Thermal/Visual/Fusion/PIP
- Visual Camera : 1600 × 1200 (2 MP)
- Display : 480 × 640 Resolution, 3.2" LCD screen
- Battery Backup : Approximately 6 hours (Built-in)
- Memory : Built-in 16 GB (35,000 Images)

- IR Resolution : 192 × 144 (27,648 pixels)
- SuperIR Resolution : 384 × 288
- Temperature Range : -20°C to 550°C
- Accuracy : ±2°C, ±2%
- Field of View (FOV) : 37.2° × 27.8°
- NETD : < 40 mK
- Focus : Fixed & minimum distance 0.5m
- Image Frequency : 25 Hz



- Image modes : Thermal/Visual/Fusion/PIP/Blending
- Visual Camera : 3264 × 2448 (8 MP)
- Display : 640 × 480 Resolution, 3.5" LCD touch screen
- Battery Backup : Approximately 6 hours (Interchangeable Battery)
- Memory : 32 GB Micro SD card (60,000 Images & 150 hours Video)

- IR Resolution : 256 × 192 (49,152 pixels)
- SuperIR Resolution : 512 × 384
- Temperature Range : -20°C to 550°C
- Accuracy : ±2°C, ±2%
- Field of View (FOV) : 25° × 18.8°
- NETD : < 40 mK
- Focus : Manual & minimum distance 0.1m
- Image Frequency : 25 Hz



- Image Modes : Thermal/Visual/Fusion/PIP/Blending
- Visual Camera : 3264 × 2448 (8 MP)
- Display : 640 × 480 Resolution, 3.5" LCD touch screen
- Battery Backup : Approximately 6 hours (Interchangeable Battery)
- Memory : 32 GB Micro SD card (60,000 Images & 150 hours Video)

THERMAL IMAGERS

- IR Resolution : 384 x 288 (110,592 pixels)
- SuperIR Resolution : 768 x 576
- Temperature Range : -20°C to 650°C
- Accuracy : $\pm 2^{\circ}\text{C}$, $\pm 2\%$
- Field of View (FOV) : $41.1^{\circ} \times 30.5^{\circ}$
- NETD : $< 30 \text{ mK}$
- Focus : Manual & minimum distance 0.1m
- Image Frequency : 30 Hz

TC 3360



- Image Modes : Thermal/Visual/Fusion/PIP/Blending
- Visual Camera : 3264×2448 (8 MP)
- Display : 640×480 Resolution, 3.5" LCD touch screen
- Battery Backup : Approximately 4 hours (Interchangeable Battery)
- Memory : 64 GB Micro SD card (100,000 Images & 300 hours Video)

- IR Resolution : 640 x 480 (307,200 pixels)
- SuperIR Resolution : 1280×960
- Temperature Range : -20°C to 650°C
- Accuracy : $\pm 2^{\circ}\text{C}$, $\pm 2\%$
- Field of View (FOV) : $41.9^{\circ} \times 33.3^{\circ}$
- NETD : $< 35 \text{ mK}$
- Focus : Manual & minimum distance 0.3m
- Image Frequency : 30 Hz

TC 3660



- Image Modes : Thermal/Visual/Fusion/PIP/Blending
- Visual Camera : 3264×2448 (8 MP)
- Display : 640×480 Resolution, 3.5" LCD touch screen
- Battery Backup : Approximately 4 hours (Interchangeable Battery)
- Memory : 64 GB Micro SD card (100,000 Images & 300 hours Video)

- IR Resolution : 384 x 288 (110,592 pixels)
- SuperIR Resolution : 768 x 576
- Temperature Range : -20°C to 650°C
- Accuracy : $\pm 2^{\circ}\text{C}$, $\pm 2\%$
- Field of View (FOV) : $24^{\circ} \times 18^{\circ}$ (Optional lens available)
- NETD : $\leq 50 \text{ mK}$
- Focus : Auto & minimum distance 0.15m
- Image Frequency : 25 Hz

TC P360



- Image Modes : Thermal/Visual/Fusion/PIP/Blending
- Visual Camera : 3264×2448 (8 MP)
- Display : 640×480 Resolution, 3.5" Capacitive touch LCD screen
- Battery Backup : 8 Hours (Built-in)
- Memory : 16GB TF card

THERMAL IMAGERS

- IR Resolution : 384 x 288 (110,592 pixels)
- SuperIR Resolution : 768 x 576
- Temperature Range : -20°C to 650°C
- Accuracy : $\pm 1^{\circ}\text{C}$, $\pm 1\%$
- Field of View (FOV) : $25^{\circ} \times 19^{\circ}$
(Optional lens available)
- NETD : $< 35 \text{ mK}$
- Focus : Laser Assisted AF, Continuous AF, AF, Manual, Touch AF & minimum distance 0.1m
- Image Frequency : 50 Hz



- Image Modes :
Infrared/Visual/Fusion/PIP/Blending
- Visual Camera : 3264 x 2448 (8 MP)
- Display : 800 x 480 Resolution,
4.3" LCD touch screen
- Battery Backup : Approximately
4 hours (Interchangeable Battery)
- Memory : 64 GB Micro SD Card
(60,000 Images & 54 hours Video)

- IR Resolution : 480 x 360 (172,800 pixels)
- SuperIR Resolution : 960 x 720
- Temperature Range : -20°C to 650°C
(TC 4460) & -20°C to 2000°C (TC 4460H)
- Accuracy : $\pm 2^{\circ}\text{C}$, $\pm 2\%$
- Field of View (FOV) : $18.7^{\circ} \times 14^{\circ}$
(Optional lens available)
- NETD : $< 35 \text{ mK}$
- Focus : Laser Assisted AF, Continuous AF, AF, Manual, Touch AF & minimum distance 0.25m
- Image Frequency : 50 Hz



- Image Modes :
Infrared/Visual/Fusion/PIP/Blending
- Visual Camera : 3264 x 2448 (8 MP)
- Display : 800 x 480 Resolution,
4.3" LCD touch screen
- Battery Backup : Approximately
4 hours (Interchangeable Battery)
- Memory : 64 GB Micro SD card
(60,000 Images & 54 hours Video)

- IR Resolution : 640 x 480 (307,200 pixels)
- SuperIR Resolution : 1280 x 960
- Temperature Range : -20°C to 650°C
(TC 4660) & -20°C to 2000°C (TC 4660H)
- Accuracy : $\pm 2^{\circ}\text{C}$, $\pm 2\%$
- Field of View (FOV) : $25^{\circ} \times 19^{\circ}$
(Optional lens available)
- NETD : $< 35 \text{ mK}$
- Focus : Laser Assisted AF, Continuous AF, AF, Manual, Touch AF & minimum distance 0.25m
- Image Frequency : 50 Hz



- Image Modes :
Infrared/Visual/Fusion/PI/Blending
- Visual Camera : 3264 x 2448 (8 MP)
- Display : 800 x 480 Resolution,
4.3" LCD touch screen
- Battery Backup : Approximately
4 hours (Interchangeable Battery)
- Memory : 64 GB Micro SD card
(60,000 Images & 54 hours Video)

THERMAL CAMCORDERS

- IR Resolution : 480 x 360 (172,800 pixels)
- SuperIR Resolution : 960 x 720
- Temperature Range : -20°C to 650°C
(TCC 7460) & -40°C to 2200°C (TCC 742K)
- Accuracy : $\pm 1^{\circ}\text{C}$, $\pm 1\%$
- Field of View (FOV) : L6 : $6^{\circ} \times 4.5^{\circ}$; L9 : $9^{\circ} \times 6.8^{\circ}$;
L19 : $18.7^{\circ} \times 14^{\circ}$; L37 : $37.3^{\circ} \times 27.8^{\circ}$
- NETD : $< 30 \text{ mK}$
- Focus : Laser Assisted AF, Continuous AF, AF,
Manual, Touch AF
- Minimum Focus distance : L6 : 2 m ; L9 : 1 m ;
L19 : 0.15 m ; L37 : 0.15 m


TCC 7460/TCC 742K



- Image Frequency : 30 Hz
- Image Modes :
Infrared/Visual/Fusion/PIP/Blending
- Visual Camera : 3264 x 2448 (8 MP)
- Display : 1280 x 720 Resolution,
5" LCD touch screen
- Battery Backup : Approximately
4 hours (Interchangeable Battery)
- Memory : 128 GB SD card
(120,000 Images & 500 hours Video)

- IR Resolution : 640 x 480 (307,200 pixels)
- SuperIR Resolution : 1280 x 960
- Temperature Range : -20°C to 650°C
(TCC 7660) & -40°C to 2200°C (TCC 762K)
- Accuracy : $\pm 1^{\circ}\text{C}$, $\pm 2\%$
- Field of View (FOV) : L8 : $8^{\circ} \times 6^{\circ}$; L12 : $12^{\circ} \times 9^{\circ}$;
L25 : $24.8^{\circ} \times 18.7^{\circ}$; L50 : $50^{\circ} \times 37.3^{\circ}$
- NETD : $< 30 \text{ mK}$
- Focus : Laser Assisted AF, Continuous AF, AF,
Manual, Touch AF
- Minimum Focus distance : L8 : 2 m ; L12 : 1 m ;
L25 : 0.15 m ; L50 : 0.15 m

TCC 7660/TCC 762K



- Image Frequency : 30 Hz
- Image Modes :
Thermal/Visual/Fusion/PIP/Blending
- Visual Camera : 3264 x 2448 (8 MP)
- Display : 1280 x 720 Resolution,
5" LCD touch screen
- Battery Backup : Approximately
4 hours (Interchangeable Battery)
- Memory : 128 GB SD card
(120,000 Images & 500 hours Video)

- IR Resolution : 1280 x 1024 (1,310,720 pixels)
- SuperIR Resolution : 2560 x 2048
- Temperature Range : -40°C to 2200°C
- Accuracy : $\pm 1^{\circ}\text{C}$, $\pm 1\%$
- Field of View (FOV) : L8 : $7.9^{\circ} \times 6.3^{\circ}$;
L12 : $12^{\circ} \times 9.6^{\circ}$; L25 : $25^{\circ} \times 20^{\circ}$; L50 : $50^{\circ} \times 40^{\circ}$
- NETD : $< 20 \text{ mK}$
- Focus : Laser Assisted AF, Continuous AF, AF,
Manual, Touch AF
- Minimum Focus distance : L8 : 5 m ;
L12 : 1.65 m ; L25 : 0.3 m ; L50 : 0.2 m

TCC 812K



- Image Frequency : 30 Hz
- Image Modes :
Infrared/Visual/Fusion/PIP/Blending
- Visual Camera : 4208 x 3120 (13 MP)
- Display : 1920 x 1080 Resolution,
5.1" OLED touch screen, $\text{Lv } 360 \text{ Cd/m}^2$
- Battery Backup : Approximately
4 hours (Interchangeable Battery)
- Memory : 128GB SD card
(30,000 Images & 130 hours Video)

THERMAL IMAGERS

SPECIFICATIONS					
MODEL	TC E050	TC S030	TC S240	TC 2150	TC 2250
Thermal Resolution	96 × 96	96 × 96	256 × 192	192 × 144	256 × 192
Thermal Sensitivity (NETD)	< 50 mK	< 50 mK	< 40 mK	< 40 mK	< 40 mK
Field Of View (FOV)	50° × 50°	50° × 50°	50° × 37.2°	27.8° × 37.2°	37.2° × 50.0
Spatial Resolution (IFOV)	8.89 mrad	8.89 mrad	3.43 mrad	3.3 mrad	3.3 mrad
Focus Mode	Fixed	Fixed	Fixed	Fixed	Fixed
Temperature Measurement Range	-20°C to 550°C	-20°C to 350°C	-20°C to 400°C	-20°C to 550°C	-20°C to 550°C
Image Frequency	25 Hz	25 Hz	25 Hz	25 Hz	25 Hz
Minimum Focus Distance	0.1m	0.1m	0.3m	0.3m	0.3m
Display	240 × 320 Resolution, 2.4" LCD Screen	320 × 240 Resolution, 3.5" LCD touch screen	640 × 480 Resolution, 3.5" LCD touch screen with auto-rotation	240 × 320 Resolution, 3.2" LCD Screen	480 × 640 Resolution, 3.2" LCD Screen
Digital Zoom	-	1.0 x to 4.0 x continuous	1.0 x to 4.0 x continuous	-	-
Image Modes	Thermal/Visual/Fusion	Thermal/Visual/Fusion/PIP/Blending	Thermal/Visual/Fusion/PIP/Blending	Thermal/Visual/Fusion/PIP	Thermal/Visual/Fusion/PIP
Storage	Built-in 4G eMMC	Built-in 4 GB flash memory	Built-in 16 GB flash memory	Built-in 16 GB flash memory	Built-in 16 GB flash memory
Image Storage Capacity	18,000 Images	30,000 Images	60,000 Images	90,000 Images	35,000 Images
Video Storage Capacity	-	20 hours	54 hours	-	-
Annotations	-	Note Annotations	Note Annotations	-	-
Laser	Yes	-	-	-	-
USB	Yes	Yes	Yes	Yes	Yes
Bluetooth	-	-	Yes	-	-
WiFi	-	Yes	Yes	Yes	Yes
Battery Life	Approximately 8 hours	Approximately 4 hours	Approximately 4 hours	Approximately 6 hours	Approximately 6 hours

THERMAL IMAGERS

SPECIFICATIONS					
MODEL	TC 3151	TC 3250	TC 3360	TC 3660	TC P360
Thermal Resolution	192 × 144	256 × 192	384 × 288	640 × 480	384 × 288
Thermal Sensitivity (NETD)	< 40 mK	< 40 mK	< 30mK	< 35mK	≤ 50mK
Field of View (FOV)	37.2° × 27.8°	25° × 18.8°	41.1° × 30.5°	41.9° × 33.3°	24° × 18°
Spatial Resolution (IFOV)	3.33 mirad	1.74 mirad	1.87 mirad	1.13 mirad	1,1 mirad
Focus Mode	Fixed	Manual Focus	Manual Focus	Manual Focus	Motor/Auto
Temperature Measurement Range	-20°C to 550°C	-20°C to 550°C	-20°C to 650°C	-20°C to 650°C	-20°C to 650°C
Image Frequency	25 Hz	25 Hz	30 Hz	30 Hz	50 Hz
Minimum Focus Distance	0.5m	0.1m	0.1m	0.3m	0.15m
Display	640 × 480 Resolution, 3.5" LCD touch screen	640 × 480 Resolution, 3.5" LCD touch screen	640 × 480 Resolution, 3.5" LCD touch screen	640 × 480 Resolution, 3.5" LCD touch screen	640 × 480 Resolution, 3.5" Capacitive touch LCD screen
Digital Zoom	1.0x to 8.0 x continuous	1.0 x to 8.0 x continuous	1.0 x to 8.0 x continuous	1,0 x to 8.0 x continuous	1 x to 10 x continuous
Image Modes	Thermal/Visual/Fusion/PIP/ Blending	Thermal/Visual/Fusion/PIP/ Blending	Thermal/Visual/Fusion/PIP/ Blending	Thermal/Visual/Fusion/PIP/ Blending	IR/CCD/Duo Vision/ Duo Vision Plus
Storage	32 GB Micro SD Card	32 GB Micro SD Card	64 GB Micro SD Card	64 GB Micro SD Card	16 GB TF card
Image Storage Capacity	60,000 Images	60,000 Images	100,000 Images	100,000 Images	65,000+ Images
Video Storage Capacity	150 hours	150 hours	300 hours	300 hours	-
Annotations	Voice/Note Annotation	Voice/Note Annotation	Voice/Note Annotation	Voice/Note Annotation	Voice/Note Annotation
Laser	Yes	Yes	Yes	Yes	Yes
USB	Yes	Yes	Yes	Yes	Yes
Bluetooth	Yes	Yes	Yes	Yes	Yes
WiFi	Yes	Yes	Yes	Yes	Yes
Interchangeable Battery	Yes	Yes	Yes	Yes	Built-in
Battery life	Approximately 6 hours	Approximately 6 hours	Approximately 4 hours	Approximately 4 hours	Approximately 8 hours

THERMAL IMAGERS

SPECIFICATIONS						
MODEL	TC 4360	TC 4460	TC 4660	TCC 7460	TCC 7660	TCC 812k
Thermal Resolution	384 x 288	480 x 360	640 x 480	480 x 360	640 x 480	1280 x 1024
Thermal Sensitivity (NETD)	< 35 mK	< 35 mK	< 35 mK	< 30 mK	< 30 mK	< 20 mK
Field of View (FOV)	25° x 19°	18.7° x 14°	25° x 19°	L6 : 6° x 4.5°; L9 : 9° x 6.8°; L19 : 18.7° x 14°; L37 : 37.3° x 27.8°	L8 : 8° x 6°; L12 : 12° x 9°; L25 : 24.8° x 18.7°; L50 : 50° x 37.3°	L8 : 7.9° x 6.3°; L12 : 12° x 9.6°; L25 : 25° x 20°; L50 : 50° x 40°
Spatial Resolution (IFOV)	1.13 mrad	0.68 mrad	0.68 mrad	L6 : 0.22 mrad; L9 : 0.33 mrad; L19 : 0.66 mrad; L37 : 1.35 mrad	L8 : 0.22 mrad; L12 : 0.33 mrad; L25 : 0.66 mrad; L50 : 1.35 mrad	L8 : 0.11 mrad; L12 : 0.17 mrad; L25 : 0.34 mrad; L50 : 0.68 mrad
Focus mode	Laser Assisted AF/ Continuous AF/AF/ Manual Focus/Touch AF	Laser Assisted AF/ Continuous AF/AF/ Manual Focus/Touch AF	Laser Assisted AF/ Continuous AF/AF/ Manual Focus/Touch AF	Laser Assisted AF/ Continuous AF/AF/ Manual Focus/Touch AF	Laser Assisted AF/ Continuous AF/AF/ Manual Focus/Touch AF	Laser Assisted AF/ Continuous AF/AF/ Manual Focus/Touch AF
Temperature measurement Range	-20 °C to 650 °C	-20 °C to 650 °C -20 °C to 2000 °C (in TC 4460H)	-20 °C to 650 °C -20 °C to 2000 °C (in TC 4660H)	-20°C to 650°C -40°C to 2200°C (in TCC 742K)	-20°C to 650°C -40°C to 2200°C (in TCC 762K)	-40°C to 2200°C
Image Frequency	50 Hz	50 Hz	50 Hz	30 Hz	30 Hz	30 Hz
Minimum Focus Distance	0.1m	0.25m	0.25m	L6 : 2m ; L9 : 1m ; L19 : 0.15m ; L37 : 0.15m	L8 : 2m; L12 : 1m; L25 : 0.15m ; L50 : 0.15m	L8 : 5m; L12 : 1.65m; L25 : 0.3m ; L50 : 0.2m
Display	800 x 480 Resolution, 4.3" LCD touch screen	800 x 480 Resolution, 4.3" LCD touch screen	800 x 480 Resolution, 4.3" LCD touch screen	1280 x 720 Resolution, 5" LCD touch screen	1280 x 720 Resolution, 5" LCD touch screen	1920 x 1080 Resolution, 5.1" OLED touch screen, Lv 360 Cd/m ²
Digital Zoom	1.0 x to 8.0 x continuous	1.0 x to 8.0 x continuous	1.0 x to 8.0 x continuous	1.0 x to 12.0 x continuous	1.0 x to 12.0 x continuous	1.0 x to 12.0 x continuous
Image Modes	Infrared/Visual/Fusion / PIP/Blending	Infrared/Visual/Fusion/ PIP/Blending	Infrared/Visual/Fusion/ PIP/Blending	Thermal/Visual/Fusion/ PIP/Blending	Thermal/Visual/Fusion/ PIP/Blending	Thermal/Visual/Fusion/ PIP/Blending
Storage	64 GB Micro SD Card	64 GB Micro SD Card	64 GB Micro SD Card	128 GB SD Card	128 GB SD Card	128 GB SD Card
Image Storage Capacity	60,000 Images	60,000 Images	60,000 Images	120,000 Images	120,000 Images	30,000 Images
Video Storage Capacity	54 hours	54 hours	54 hours	500 hours	500 hours	130 hours
Annotations	Voice/Text note	Voice/Text note	Voice/Text note	Voice/Text note	Voice/Text note	Voice/Text note
Laser	Yes	Yes	Yes	Yes	Yes	Yes
USB	Yes	Yes	Yes	Yes	Yes	Yes
GPS & Compass	Yes	Yes	Yes	Yes	Yes	Yes
HDMI Interface	Yes	Yes	Yes	Yes	Yes	Yes
Bluetooth	Yes	Yes	Yes	Yes	Yes	Yes
WiFi	Yes	Yes	Yes	Yes	Yes	Yes
Interchangeable Battery	Yes	Yes	Yes	Yes	Yes	Yes
Battery life	Approximately 4 hours	Approximately 4 hours	Approximately 4 hours	Approximately 4 hours	Approximately 4 hours	Approximately 4 hours

INSULATION TESTERS

Salient Features

- Display : 4000 counts, double digital backlit LCD screen
- Logarithmic bargraph (CA 6522)
- Continuity at 200mA
CA 6528 : 0.02Ω - 40Ω CA 6522 : 0.00Ω - 10.00Ω
- Visual alarm : Blue/Red backlighting (CA 6528)
- Timer (min:s) : Upto 39:59
- Automatic shutdown, Hold, Manual / Lock / Duration modes
- IP 40 (CA 6528) , IP 54 (CA 6522)

1kV Insulation Testers CA 6522/CA 6528



Measurements

- **Insulation**
Test Voltage : 250 V, 500 V, 1000 V
Range/Accuracy :
CA 6522 : 50 kΩ to 40 GΩ / ± (3% +2 counts)
CA 6528 : 50 kΩ to 11GΩ / ± (1.5% R+10 pt)
- **Voltage**
Range : Upto 700 V

- Display : 4000 counts, double + bargraph
- Continuity at 200mA (0.00Ω - 10.00Ω)/ 20mA (0.0Ω - 100.0Ω)
- PI & DAR
- Visual Pass/Fail : Red/Green (CA 6526)
- Timer (min:s) : Upto 39:59
- Configurable alarms
- **Memory** :
300 measurements (CA 6524)
1300 measurements (CA 6526)
- **Communication** :
Bluetooth (CA 6526)

1kV Insulation Testers CA 6524/CA 6526



- **Insulation**
Test Voltage : 50 V, 100 V, 250 V, 500 V, 1000 V
Test current : 0.01μA to 2mA
Range : 10 kΩ to 200 GΩ
Accuracy : ± (3% +2 counts)
- **Voltage**
Range : Upto 700 V
- **Capacitance**
Range : 0.1 nF to 10 μF (CA 6526)

- Display : 4000 counts, double + bargraph
- PI & DAR (CA 6532)
- Continuity at 200mA (0.00Ω - 10.00Ω)/ 20mA (0.0Ω - 100.0Ω)
- Timer (min:s) : Upto 39:59
- **Memory** :
1300 records (CA 6532 & 6534)
- **Communication** :
Bluetooth (CA 6532 & 6534)

Insulation Testers Special Models CA 6532/CA 6534/CA 6536



- **Test Voltage/Insulation Range**
CA 6532 : 50 V, 100 V/10 kΩ to 20 GΩ for Telecommunications (maximum 100 Km line length)
CA 6534 : 10 V, 25 V, 100 V, 250 V, 500 V/ 2 kΩ to 50 GΩ for electronics industries & electrostatic discharge
CA 6536 :
10 V to 100 V in 1V step/2 kΩ to 20 GΩ for Avionics, Space & Defense
Test current : 0.01μA to 2mA
Accuracy : ± (3% +2 counts)
- **Voltage Range** : Upto 700 V
- **Capacitance** : 0.1 nF to 10 nF (CA 6532)

INSULATION TESTERS

Salient Features

- Display : Backlit LCD graphic display with bargraph
- Programmable test duration
- Automatic calculation of the DAR/PI
- DD calculation (CA 6545)
- Locking test voltage
- Programmable Alarms (CA 6545)
- Smoothing of Display (CA 6545)
- Automatic detection of the presence of AC or DC external voltage on terminals
- Auto power save mode to save battery power

5kV Insulation Testers

CA 6505/CA 6545

IP 33 1000V CAT III IEC 61557



Measurements

- **Insulation**
Test voltage (Fixed/Adjustable) :
500 V, 1000 V, 2500 V, 5000 V/40 V to 5100 V in
10 V or 100 V increments
Range : 10 kΩ to 10 TΩ
Accuracy : ± 5% +3 pts
- **Voltage**
Range : Upto 5100 V
- **Leakage Current** : Upto 3mA
- **Capacitance** : Upto 49.99 F

- Large backlit LCD screen, with digital display & bargraph
- Automatic calculation of the DAR/PI/DD ratios
- Programmable alarms
- Displays a error code in an anomaly condition (CA 6549)
- Direct plotting resistance over time (R(t)) curves in display (CA 6549)
- Calculation of R at Reference Temperature (T°) (CA 6549)
- **Memory** : 128KB storage capacity
- **Communication** : USB (Two- Way)
- PC interface

5kV Insulation Testers

CA 6547/CA 6549

IP 33 1000V CAT III IEC 61557



- **Insulation**
Test Voltage (Fixed/Adjustable) : 500 V, 1000 V,
2500 V, 5000 V/40 V to 5100 V in 10 V or 100 V
increments
Range : 10 kΩ to 10 TΩ
Accuracy : ±5% +3 pts
- **Voltage**
Range : Upto 5100 V
- **Leakage Current**
Range : Upto 3mA
- **Capacitance**
Range : Upto 49.99 F

- Large graphical LCD display with backlight & bargraph
- Calculation of the DAR/PI/DD ratios
- Programmable test duration
- Timer (min:s) : Upto 99:59
- Voltage ramp & step with "burn - in", "early break" & "I - limit" modes
- **Memory** : 80,000 points
- **Communication** : USB
- PC interface

10kV/15kV Insulation Testers

CA 6550/CA 6555

IP 34 1000V CAT IV IEC 61557



- **Test Voltage/Insulation range**
CA 6550 : 500 V, 1000 V, 2500 V, 5000 V,
10,000 V/10 kΩ to 25 TΩ
CA 6555 : 500 V, 1000 V, 2500 V, 5000 V,
10,000 V, 15,000 V/10 kΩ to 30 TΩ
Accuracy : ±5% +3 pts
- **Voltage**
Range : Upto 2500 V AC/Upto 4000 V DC
- **Leakage Current**
Range : Upto 8mA
- **Capacitance**
Range : Upto 19.99 μF

OSCILLOSCOPES

Salient Features

- 3.5" colour TFT – Resolution 320 x 240 – LED backlighting
- Screen shot : Upto 100 files
- PC interface

Oscilloscope Mode

- **Bandwidth & Channels :**
20 MHz & 2 isolated channels (**OX 5022**)
40 MHz & 2 isolated channels (**OX 5042**)
- Input impedance : 1 M Ω $\pm$ 0.5%, approximately 17 pF
- 2 MB for file storage
- 2,500 real acquisition points on screen

OX 5022/OX 5042



Measurements

Multimeter Mode

- 2 channels, 8,000-count display + min/max bargraph
- Graphical recording : 2,700 measurements (5 min to 1 month)
- AC, DC & AC+DC voltages :
600 mV to 600 VRMS, 800 mV to 800 VDC
- Resistance & capacitance : 80 Ω to 32 M Ω & 5 nF to 5 mF
- Measures frequency, rotation speed, 3.3 V diode test, temperature

Harmonic Analyzer Mode :

- 2 channels, 31 orders, frequency of fundamental from 40 to 450 Hz

- 7" WVGA colour TFT LCD touch screen, 800 x 480 – LED backlighting
- 2,500 real acquisition points on screen
- PC interface

Oscilloscope Mode

- Bandwidth :
60 MHz (**OX 9062**)
100 MHz (**OX 9102 & OX 9104**)
300 MHz (**OX 9304**)
- Channels :
2 isolated channels (**OX 9062 & OX 9102**)
4 isolated Channels (**OX 9104**)
- Input impedance : 1 M Ω $\pm$ 0.5%, approximately 12 pF
- 20 automatic measurements per channel
- Memory 2GB

OX 9062/OX 9102/
OX 9104/OX 9304



Multimeter Mode :

- 2 or 4 channels – 8,000 counts min/max/frequency/relative – TRMS
- AC, DC & AC+DC voltages :
600 mV to 600 VRMS, 800 mV to 800 VDC
- Resistance & capacitance : 80 Ω to 32 M Ω & 5 nF to 5 mF
- Frequency 200 kHz, Rotation speed, 3.3 V diode test, temperature

Harmonic Analyzer Mode :

- 2 or 4 (Based on model)
- Harmonics : Upto 63rd orders
- Fundamental frequency 40 to 450 Hz in auto or manual mode

Logger Mode :

- Duration : 20,000s – Interval : 0.2s – Files : 100,000 measurements

EARTH TESTERS

Salient Features

- Backlit custom 206-segment LCD
- Auto Power off
- Noise indication
- Measurement Mode :
V, I, R 2P (Ω), R 3P (Ω)

2P/3P Earth Tester CA 6424

IP 65 CAT II 600V



Measurements

- Voltage : Upto 600 V
- 2P earth resistance/accuracy :
0.05 Ω to 50 k Ω /± (2%R +1count)
- 3P earth resistance/accuracy :
0.5 Ω -50.00 k Ω /± (2%R +1count)
- RH stake resistance : 0.05 Ω to 49.99 k Ω
- U_{sc} voltage measurement : Upto 600 VAC
- Leakage current : Upto 60.00 A

- Large backlit digital display with
2,000 counts
- 3 fault presence indicators to validate
measurement
- Battery
CA 6460 - Non Rechargeable/
Rechargeable Batteries
CA 6462-Rechargeable Batteries only

4P Earth Tester CA 6460/CA 6462

IP 65 REC 60/357



- **3-in-1 tester**
Resistivity : (" Wenner method"
(4-rod method))
Ground Resistance : "TAGG method"
(62% method)
- **Resistance**
Range : 0.01 to 2,000 Ω (3 automatic ranges)
Test current : 10mA, 1mA, 0.1mA
Accuracy : ±2% ±1point
Frequency : 128Hz

- Backlit LCD display featuring
(3 simultaneous display levels)
- Noise interference detection
- Alarm function
- **Memory** : 512 memory locations
- **Communication** : USB

3P/4P Earth Tester CA 6470N/CA 6471

IP 65 100V CAT III 1000V



- **4-in-1 tester (CA 6470N)** :
Earth, Resistivity, Coupling, Continuity
- **5-in-1 tester (CA 6471)** :
Earth, Selective earth, Resistivity,
Coupling, Continuity
- **3-pole, 4-pole measurements**
Range : 0.01 Ω to 99.9 k Ω
Frequency : 41 to 512 Hz
- **Selective 4-pole measurements,
2 clamps (CA 6471)**
Range : 0.01 Ω to 500 Ω
Frequency : 128 Hz, 1367 Hz, 1611 Hz,
1758 Hz
- **Resistivity**
Range : 0.01 Ω to 99.9 k Ω
Frequency : 128 Hz

EARTH TESTERS

Salient Features

- Backlit LCD display featuring (3 simultaneous display levels)
- Automatic & Expert mode
- Earth measurement on Pylons with earth cable (with CA 6474 option)
- Alarm function
- **Memory** : 512-record memory
- **Communication** : USB
- **Measurement with CA 6474**
Range : 0.001 Ω to 99.9 k Ω
Frequency : 41 to 5078 Hz

3P/4P Earth Tester CA 6472/CA 6474



Measurements

- **3P, 4P/4P Selective Method** :
Range : 0.01 Ω to 99.9 k Ω
Frequency : 41 to 5,078 Hz
- **Earth Measurement (2 clamps)**
Range : 0.01 Ω to 500 Ω
Frequency : 1,367 Hz (auto) & 1,367 Hz, 1,611 Hz, 1,758 Hz (manual)
- **Resistivity** :
Range : 0.01 Ω to 99.9 k Ω
Frequency : 41 to 128 Hz
- **Earth Potential**
Range : 0.01 mV to 65.00 V
Frequency : 41 to 128 Hz
- **DC Resistance**
Range : 0.001 Ω to 99.9 k Ω

Earth Loop Tester

CA 6417



- $\varnothing 35$ mm clamping diameter
- Large, 152-segment multi-function OLED display
- Display Counts : 1,500 counts (Loop ohmmeter) & 4,000-count display (Ammeter)
- Alarms
- HOLD & PRE-HOLD
- Auto power off
- **Memory** : 2,000 measurements
- **Communication** : Bluetooth
- PC interface & Android app

- **Loop Resistance**
Range : Upto 1,500 Ω
Accuracy : $\pm 1.5\% \pm 0.01$
- **Frequency**
2,083 Hz (Measurement frequency)
50, 60, 128 or 2,083 Hz (Transposition freq.)
- **Loop Inductance**
Range : Upto 500 μ H
Accuracy : $\pm 3\% \pm r$
- **Ground Voltage** : Upto 75 V
- **Current**
Range : Upto 39.99 A
Accuracy : $\pm 2\% \pm r$

Earth Loop Tester

CA 6418



- $\varnothing 32/55$ mm max. clamping diameter (Oblong head)
- Large, 152-segment multi-function OLED display
- Alarms
- Automatic calibration of the jaw gap
- HOLD : Manual or automatic PRE-Hold
- Auto power off
- **Memory** : 300 measurements (Time/date-stamped)

- **Loop Resistance**
Range : Upto 1,200 Ω
Accuracy : $\pm (1.5\%R + 2r)$
- **Current**
Range : Upto 20 A
Accuracy : $\pm (2\%R + 200\mu A)$
- **Ground Voltage**
Range : Upto 75 V

CLAMP METERS

Salient Features

- Clamping diameter
F205 : 34 mm , **F404** : 48 mm , **F604** : 60 mm
- Display
F205 : 6000 counts backlit LCD
F404/F604 : 10,000 counts backlit LCD
- Diode Test (Semiconductor function)
- Measures True Inrush, Min/Max, Peak+/Peak-
- Audible continuity (adjustable from 1 to 999 Ω)
- RELativ $\Delta X / \Delta X/X$ (%) measurement
- Auto range, Hold & Auto power off
- Measures kW, kVAr, kVA & PF (**F205**)
- IP 40 (**F205**) , IP 54 (**F404 & F604**)

Power Clamp Meter

F205/F404/F604

IP 54 600V CAT IV



Measurements

- **Voltage V (AC/DC)**
F205 : Upto 1,200 V AC/DC
F404 & F604 : Upto 1,200 V AC/ 1,700 V DC
- **Current I (AC/DC)**
F205 : Upto 600 A AC/ 900 A DC
F404 : Upto 1,000 A AC/ 1,500 A DC
F604 : Upto 2,000 A AC/ 3,000 A DC
- **Accuracy (V & I)**: 1% of reading + 3 counts
- **Resistance** : Upto 99.99 k Ω
- **Temperature** : Upto 1000°C (**F404 & F604**)
- **1 phase & 3 phase power** : upto 600 KW (**F205**)

- **Specially designed for Photo voltaic applications with 1700 V DC**
- Clamping diameter
F406 : 48 mm , **F606** : 60 mm
- Display : 10,000 counts backlit LCD
- Diode Test (Semiconductor function)
- Measures True Inrush, Min/Max, Peak+/Peak-
- Audible continuity (adjustable from 1 to 999 Ω)
- RELativ $\Delta X / \Delta X/X$ (%) measurement
- Auto range, Hold & Auto power off
- Measures kW, kVAr, kVA & PF

Solar Clamp Meter

F406/F606

IP 54 1700V CAT III



- **Voltage V (AC/DC)** : Upto 1,200 V AC/1,700 V DC
- **Current I (AC/DC)** :
F406 : Upto 1,000 A AC/ 1,500 A DC
F606 : Upto 2,000 A AC/ 3,000 A DC
- **Accuracy (V & I)**: 1% of reading + 3 counts
- **Resistance** : Upto 99.99 k Ω
- **1 phase & 3 phase Power** :
F406 : Upto 1,200 kW
F606 : Upto 2,400 kW
- Voltage & Current THDf/THDr

- Clamping diameter
F407 : 48 mm , **F607** : 60 mm
- Display : 10,000 counts backlit LCD
- Measures True Inrush, Min/Max, Peak+/Peak-
- Audible continuity (40 Ω)
- Auto range, Hold & Auto power off
- Measures kW, kVAr, kVA, PF & DPF
- Data recording & PC interface
- Communication : Bluetooth

Power & Harmonics Clamp Meter

F407/F607

IP 54 1000V CAT III



- **Voltage V (AC/DC)** : Upto 1,000 V
- **Current I (AC/DC)** :
F407 : Upto 1,000 A AC/ 1,500 A DC
F607 : Upto 2,000 A AC/ 3,000 A DC
- **Accuracy (V & I)**: 1% of reading + 3 counts
- **Resistance** : Upto 99.99 k Ω
- **1 phase & 3 phase Power** :
F407 : Upto 1,000 kW
F607 : Upto 2,000 kW
- **Harmonic Analysis**
Voltage & Current THDf/THDr
Individual Harmonics upto 25th order

DIGITAL MULTIMETERS

Salient Features

- Display : 6000 counts monochrome digital display with blue backlighting
- Audible continuity & Diode test
- VLowZ, HOLD, NCV
- Min, Max values
- IP 54

MTX 203



Measurements

- **Voltage**
V (AC) : 0.4 V to 600 V & 10 mV to 1000 V
V (AC/DC/AC+DC) : 10 mV to 1000 V
- **Current**
A (AC) : 2 mA to 10 A & 10 μ A to 10 A
- **Resistance** :
Range : Upto 40 M Ω
- **Capacitance**
Range : Upto 100 mF
- **Temperature**
Range : Upto 1,200°C

- Display : 6,000 counts backlit with bargraph
- Measurement Type : Average (**DMM 210 & DMM 220**), TRMS (**DMM 230**)
- Calibre Selection : Autorange/Manual
- Audible continuity & Diode test
- Automatic shutdown (deactivatable)
- Relative mode – MIN, MAX
- IP 67

DMM 210/DMM 220/
DMM 230



- **Voltage**
V(AC) : 6 V to 1000 V
V(DC) : 600 mV to 1000 V
- **AC bandwidth** : Upto 1 kHz
- **Current**
A (AC/DC) : 600 μ A to 10 A
- **Resistance** : 600 Ω to 60 M Ω
- **Frequency** : Upto 10 MHz
- **Capacitance** : Upto 1000 μ F (**DMM 220 & DMM 230**)
- **Temperature** : Upto 750°C (**DMM 220 & DMM 230**)

- Display : 40,000 counts backlit with bargraph
- Measurement Type : TRMS
- Calibre Selection : Autorange/Manual
- Audible continuity & Diode test
- Automatic shutdown (deactivatable)
- Relative mode – MIN, MAX, PEAK (1 ms)
- IP 67

DMM 240



- **Voltage**
V(AC/DC) : 400 mV to 1000 V
- **AC bandwidth** : Upto 1 kHz
- **Current**
A (AC/DC) : 400 μ A to 10 A
- **Resistance** : 400 Ω to 40 M Ω
- **Frequency** : Upto 100 MHz
- **Capacitance** : Upto 40 mF
- **Temperature** : Upto 1000°C

DIGITAL MULTIMETERS

Salient Features

- Display : 2 x 6,000 counts with backlighting & bargraph
- Autorange/Deactivatable
- Automatic AC/DC detection (CA 5273)
- Audible continuity & Diode test
- Differential (ΔX)/RELative ($\Delta X/X\%$) measurement (CA 5277)
- 1 ms Peak+/Peak values (CA 5277)
- Hold
- IP 54

CA 5273/CA 5275/CA 5277



Measurements

- **Voltage**
V (AC/DC) : 600 mV to 1000 V (CA 5273)
V (AC/DC/AC+DC) : 60 mV to 1000 V (CA 5275 & CA 5277)
- **AC bandwidth** : Upto 3 kHz (CA 5273) & 10 kHz (CA 5275 & CA 5277)
- **Current**
A (AC/DC) : 20 mA to 10 A (CA 5273)
A (AC/DC/AC+DC) : 6 mA to 10 A (CA 5275 & CA 5277)
- **Resistance** : Upto 60 M Ω
- **Frequency** : Upto 50 kHz
- **Capacitance** : Upto 60 mF
- **Temperature** : Upto 1,200°C (CA 5273 & CA 5277)

- Display : 60,000 counts backlight digital monochrome
- TRMS value
- Audible continuity detection (600 Ω SIGNAL < 30 Ω $\pm 5 \Omega$ < 5 V)
- Diode test
- HOLD/Auto- HOLD
- **Communication** : USB
- PC interface
- IP 67

MTX 3291



- **Voltage**
V (AC/DC/AC+DC) : Upto 1000 V
- **AC & AC+DC bandwidth** : 100 kHz
- **Current**
A (AC/DC/AC+DC) : Upto 20 A
- **Frequency** : Upto 600 kHz
- **Resistance** : Upto 60 M Ω
- **Capacitance** : Upto 60 mF
- **Temperature** : Upto 800°C

DIGITAL MULTIMETERS

- Display : 4 x 100,000 count colour graphical with backlighting
- TRMS value
- Audible continuity detection (1000 Ω /SIGNAL <20 Ω < 3.5 V) & Diode test
- Display of trends, multiple parameters & 600 Hz waveform
- HOLD/Auto- HOLD
- **Memory**
CA 5292 : 10,000 measurements
CA 5293 : 30,000 measurements
- **Communication** : USB, Bluetooth (optional)
- PC interface
- IP 67

CA 5292/CA 5293



- **Voltage**
V (AC/DC/AC+DC) : Upto 1000 V Accuracy
V DC : 0.03% (CA 5292) & 0.02% (CA 5293)
V AC : 0.3%
AC & AC+DC bandwidth : Upto 100 kHz (CA 5292) & 200 kHz (CA 5293)
- **Current**
A (AC/DC/AC+DC) : Upto 20 A
Accuracy : 0.08% (DC) & 0.3% (AC/AC+DC)
AC & AC+DC bandwidth : 50 kHz
- **Frequency** : Upto 5 MHz
- **Resistance** : Upto 100 M Ω
- **Capacitance** : Upto 10 mF
- **Temperature** : Upto 1200 $^{\circ}$ C (with K thermocouple)

- Clamping diameter : 28 mm
- Display : 10,000 counts backlit LCD
- Hold & Auto power off
- Audible Continuity (Buzzer < 35 Ω)
- Complied IEC 61557-13 standard

RMS Leakage Current Clamp

F65



- **AC current** :
Range : 60 mA to 100 A
Accuracy : 1.2 % $\pm$ 5 cts
- **Voltage (AC/DC)** : 600 V
- **Resistance & Continuity** at 1 k Ω
- **Frequency** : 5 Hz to 1 kHz

MICRO-OHMMETERS

Salient Features

- Large backlit LCD display
- Auto measurement mode
- Automatic "on the fly" or manual recording mode
- Auto power-off
- Automatic discharge (CA 6255)
- **Memory**
100 measurements (CA 6240)
1,500 measurements (CA 6255)
- **Communication**
Optical/USB link (CA 6240)
RS 232 link (CA 6255)
- PC interface

10 A Micro-Ohmmeters

CA 6240/CA 6255




Measurements

- **Resistance**
CA 6240 : $5\mu\Omega$ to 399.9Ω
CA 6255 : $5m\Omega$ to $2,500\Omega$
Accuracy : $\pm 0.25\% \pm 2$ counts
- **Test current**
Range : Upto 10 A

200 A Micro-Ohmmeters

CA 6292



- **Resistance**
Range : $0.1\mu\Omega$ to 1Ω
Accuracy : $\pm 1\%$
- **Test Current**
Range : Upto 200 A
- **Current (optional MR6292 clamp (BSG mode))**
Range : Upto 50 A

INSTALLATION TESTERS

Salient Features

- **Display :** Large 5.7" backlit graphic colour LCD screen, 320 x 240 points
- An all-in-one instrument for testing electrical installations, compliant with international standards(IEC 60364-6, NF C 15-100, VDE 100, FD C 16-600, etc.) combining design, simplicity, performance, and precision.
- Suitable for all neutral systems (TT, TN, IT) and is ideal for all sectors like industries, tertiary and residential.
- Integrated fuse table for quick reading of the results on the instrument
- Li-Ion battery for a longer battery life
- Measurement of voltage drop for correct sizing of conductor diameters
- Loop measurement with 1 mΩ resolution
- Continuity measurements at 12 mA or 200 mA
- **Memory :**
3-level storage ,1000 locations to record
- PC interface

CA 6117



Measurements

- **Insulation Test voltage :**
50 /100 / 250 / 500 / 1,000 V DC
Range : 0.01 MΩ to 2 GΩ
- **Earth Resistance :**
Upto 40 Ω (3-Pole) & 399.9 Ω
(1P selective earth)
- **RCD :** AC, A and F-type RCDs, B, B+ & EV-type
- **Loop impedance :** (Zs (L-PE) and Zi (L-N or L-L)) – 1P Live earth measurements
- **Voltage :** 550 VAC/DC
- **Current :** 199.9 A
- **Frequency :** 500 Hz
- **Phase rotation:** 20 to 500 VAC
- **Active power :** Upto 110 kW (1 phase) & 330 kW (3 phase)
- **Harmonics :** Upto 50th order

CA 6133



- **Display :** Custom 231-segment LCD with blue backlighting
- Continuity measurement at 0.2A (200mA)
- Android application for Report generation
- Earth measurement by stake and loop methods
- Insulation testing
- RCD testing: current and trip time
- Automatic test sequences
- Power supply by mains-rechargeable batteries, USB socket or vehicle cigarette lighter
- **Memory :** 30 sites x 99 tests

- **Insulation Test voltage :**
250 V / 500 V / 1 000 V
Range : 0.01 to 999.9 MΩ
- **Earth resistance :** Upto 2,000 Ω (3P method)
- **RCD test :** Type AC & RCDs : 30mA, 100 mA, 500 mA, 650 mA
- **Loop impedance :** Earth loop (Zs), Fault loop (Zi) measurements
- **Voltage :** Upto 550 VAC & 800.0 VDC
- **Current :** Upto 200 A
- **Frequency :** Upto 999.9 Hz
- **Phase rotation :** 45 to 550 V

MULTI FUNCTIONAL METERS

Salient Features

- Accuracy Class 0.5s as per IEC 62053-22
- 3 - line bright LCD display
- PT & CT programmable
- Password protection for setup page
- Load management feature
- RS485 port with Modbus RTU protocol and baud rate upto 38,400bps
- Dimension : 96mm x 96mm x 83mm
- Cut-Out: 90 x 90 mm (+/- 0.5mm)

DiGi 530S/DiGi 530H



Measurements

- RMS - V, U, I, In, Hz
- Power - kW, kVA, kVAh
- PF - Phase wise & Total
- Min, Max - V, I, Hz, kW
- Bi directional energy measurements
- Energy - kWh, kVAh, kVAh
- THD - Voltage & Current
- Individual Harmonics upto 31st order
- Demand - I, kW, kVA, kVA, (DiGi 530H)

- Accuracy Class 0.5s / Class 0.2s as per IEC 62053-22
- 3 - line bright LCD display
- PT & CT programmable
- Password protection for setup page
- 4 DI, 2 DO (DiGi 630D)
- Screen shot recording for energy accounting
- RS485 port with Modbus RTU protocol and Baud rate upto upto 38, 400 bps
- Modbus custom table
- Dimension : 96mm x 96mm x 83mm ,
- Cut-Out : 90 x 90 mm (+/- 0.5mm)

DiGi 630S/DiGi 630D



- RMS - V, U, I, In, Hz
- Power (kW, kVA, kVA, PF) -Phase wise & Total
- Min, Max - V, I, Hz, kW (Real time stamping)
- Bi directional, 4 Quadrant energy
- Dual Source Energy meter
- Energy - kWh, kVAh, kVAh
- Tariff energy recording
- THD - Voltage & Current
- Individual Harmonics upto 31st order
- Demand - I, kW, kVA, kVA
- Demand control available in DiGi 630D
- Load management feature

- Accuracy Class 0.5s /class 0.2s as per IEC 62053-22
- 3-line bright LCD display
- PT & CT programmable
- Password protection for setup page
- Load management feature
- 6 Digital inputs
- 3DO & 1AO (only in DiGi 730D)
- Screen shot recording for energy accounting
- RS485 port with Modbus RTU protocol and baud rate upto 115,200 bps for faster communication
- Modbus custom table
- Dimension : 96mm x 96mm x 83mm, Cut-Out: 90 x 90 mm (+/- 0.5mm)

DiGi 730S/DiGi 730D



- RMS - V, U, I, In, Hz
- Power (kW, kVA, kVA, PF) - Phase wise & Total
- Min, Max - V, I, Hz, kW (Real time stamping)
- Bi-directional, 4-Quadrant energy
- Dual Source Energy meter
- Tariff Energy Recording (6 rates)
- Energy - kWh, kVAh, kVAh
- THD - Voltage & Current
- Individual Harmonics upto 51st order
- Measures Crest factor and K factor
- Demand monitoring - I, kW, kVA, kVA
- Demand control available in DiGi 730D

MULTI FUNCTIONAL METERS

Salient Features

- Accuracy Class 0.2s as per IEC 62053-22
- TFT colorful LCD display with 320 x 240 resolution
- Real Time waveform Display
- CT/PT Programmable
- Real-time-clock for Min, Max, Time stamping
- Voltage swell/sag event recording with waveform
- Voltage input upto 480V
- 4AO , 8DI (Optional)
- Ethernet Port with Modbus TCP/IP protocol
- Modbus RS485 communication
- Dimension : 96 x 96 x 66mm
- Cut-Out : 90 x 90 mm (+/- 0.5mm)

DiGi 760



Measurements

- RMS - V, U, I, In, Hz
- Voltage – 3U, 3V , Current – 3I, In
- Powers – kW, kVA, kVAR – phase wise and total
- Bi-directional energy measurements
- 4-Quadrant Energy Data (on communication)
- Energy - kWh, kVAh, kVArh
- THD - Voltage & Current
- Individual harmonics on V & I upto 63rd order
- K-Factor, Crest Factor measurements
- ToU - 2 Tariff rates, 8 periods & 2 lists of tariff rate
- Demand : I, kW, kVAR, kVA

- IEC 61000-4-30 Class A power quality monitoring meter.
- Class 0.2s high accuracy energy measurement
- Sampling rate: 1024 samples/cycle
- Color LCD Display with resolution of 640 x 480
- Real-Time waveform display
- Power quality analysis -sag, swell, Transient, RVC
- 8DI, 2DO (Pulse) & 4 Relay
- Baud rate: 2400~38400bps
- Ethernet Port with Modbus TCP/IP protocol
- Modbus RS485 communication
- Memory : 8GB for data and event recording

DiGi 820



- RMS - V, U, I, In, Hz
- Voltage : Phase, Line, Average & Phase Angle
- Current :Phase, Average Current & Phase Angle
- Power (kW, kVAR, kVA) & PF : Phase & Total Power
- 4-Quadrant energy measurements
- Harmonics & Inter-harmonics upto 63rd order and Harmonic energy upto 31st order
- Records 256 PQ events along with waveform
- Captures 20µs Voltage transients
- Multi-tariff energy: 4 tariff, 8 time period, 2 time zone.
- Demand monitoring & control : I, kW, kVAR & kVA

- Backlit custom LCD display
- Accuracy Class 1.0 as per IEC 62053-21 (accuracy includes CT errors)
- Voltage input upto 500 V
- CT primary programmable 2kV isolation
- Password protection
- Load management module (on communication)
- Special high-accuracy CT supplied with the meter
- RS485-modbus RTU Protocol
- 75mm (width) x 94mm (height) x 62mm (depth)

AC Multi-Channel Energy meter

Multy4



- Single phase/Three phase : 12 x 1 phase / 4 x 3 phase
- Common for 4 - channels:
- Voltages L-N and L-L (C) & Frequency
- Voltage Min and Max L-N and L-L (C)
- For each of the 4 channels :
- Currents : Line
- Max. Current : Phase-wise (C)
- kW, kVAR, kVA & PF : Phase and Total
- kWh, kVAh : Phase and Total

Salient Features

- 35mm DIN rail installing, standard DIN ED5002
- Accuracy : Class 0.5
- LED indicates pulse output
- RS485 port, MODBUS-RTU or DL/T645 protocol (Optional)
- Dimension : 100 x 36 x 65mm (2 module)

1 Φ DC Energy Meter

PLM R90



Measurements

- RMS - V, I
- Power : kW
- Energy : kWh
- Shunt: 100A, 200A, 300A

- 35mm DIN installing in accordance with the standard DIN ED5002
- Active energy accuracy upto Class 1.0 as per IEC 62053-21
- 6+1 digit LCD display (999999.9 kWh)
- Passive pulse o/p, O/p signal is in accordance with the standard DIN43864
- LED indicates pulse O/p
- RS485 port, Modbus-RTU or DTL645 (optional)
- Dimension : 100 x 36 x 65mm

1 Φ AC Energy Meter

PLM R91



- RMS - V, I, Hz
- Power - kW, kVA, kVA, PF
- Energy - kWh, kVAh
- Max. rate of current 63A

- 35mm DIN in accordance with the standard ED5002
- kWh Class 1.0 as per IEC 62053-21
- 7+1 digit LCD display (999999.9 kWh)
- 2 LED Pulse indicators for kWh & kVAh
- Displays for phase sequence error indication
- RS485 port with Modbus-RTU protocol and baud rate of 2400, 4800, 9600
- Dimension : 72 x 100 x 65mm, Cut-Out : 50 x 50mm

3 Φ AC Energy Meter

PLM R93



- RMS - V, I, Hz,
- Power - kW, kVA, kVA, PF
- Bidirectional energy measurement
- Energy - kWh, kVAh
- Max. rate of current 63A
- Multi tariff energy values
- kVA & kVA available on communication
- Records historical data of Present day data (15 mins), Last 31 days, Last 12 months, Last 10 years

- Active energy accuracy upto Class 0.5
- PT/CT programmable
- Password protection for setup page
- Auto Phase sequence adjustment
- 2 DI Standard, 2 DO (optional)
- Baud rate : 4800 to 38400bps
- Memory : Built in memory, 7 days data storage for 5 mins data (EON 4.0G & EON 4.0E)
- Gateway function (EON 4.0 G & EON 4.0E)
- Communication
 - EON 4.0S** : RS 485 Modbus-RTU protocol
 - EON 4.0G** : 4G wireless for MQTT
 - EON 4.0E** : LAN RJ45 LAN port for Modbus TCP/ HTTP/MQTT

EON 4.0



- RMS - V, I, Hz, V & I phase angle
- Power - kW, kVA, kVA & PF
- Bidirectional energy
- Energy - kWh, kVAh, kVAh,
- Unbalance - V & I
- Individual Harmonics upto 63rd order
- Demand : I, kW & kVA
- Latest 10 years, 12 months, 31 days historical energy
- Remote configuration
- 10 secs battery backup to capture Power interruption event

ALENSOFT

DIGITISE

Have accurate and real-time data for actionable insights

CONSERVE

Minimize resource consumption & costs without compromise

SUSTAIN

Build for tomorrow with integrated, scalable and eco-conscious platforms

- Enterprise EnMS
- WAGES
- Utility Monitoring
- ISO 50001
- PQ Management solutions



- Production Management
- Quality Management
- Asset Performance
- Process Control
- Operator Productivity

**ENERGY
MANAGEMENT
SYSTEM**

**INDUSTRY 4.0
SOLUTIONS**

ALENSOFT

**ENERGY BILLING
SYSTEM**

SUSTAINABILITY



- Tenant & Area Management
- Multi-Utility Billing
- User Portal
- Mobile App



- GHG Protocol - Scope 1, 2 & 3 Emissions
- GRI / CSRD / BRSR Compliance

SOME OF OUR ESTEEMED CUSTOMERS



KRYKARD[®] Care



Extensive spare parts
warehouses strategically
located in multiple regions



Benefit from 39 years of
unparalleled industry
expertise



Easily submit service
requests from our portal
anytime, anywhere



200 highly skilled service
engineers operating from 100
locations nationwide



Swift response & Resolution
provided by our factory-
trained engineers



e-Service reports
delivered via WhatsApp
or email



Rated 4.7 ★★★★★
Trusted Quality &
Customer Satisfaction

atandra
measure. protect. conserve

KRYKARD®



Scan the QR code
for Sales Support



Scan the QR code
for Service Support



Scan the QR code
for Chat Support



Atandra Energy Private Limited

No. 5, Kumaran St., Pazhavanthangal, Chennai-600 114



enquiry@atandra.in



atandra.in



+91 95000 97966

KRYKARD is a registered trademark owned by Atandra Energy Private Limited

ISO 9001:2015 | 14001:2015 | 45001:2015 | 50001

Revision: Feb 2025. Specifications are subject to change without prior notice.