

PacStar 466 Featuring Parraid's Network Radio Gateway (NRG®)

The PacStar 466 incorporates Parraid's NRG, an all-in-one, stand-alone network appliance that revolutionizes communications by seamlessly integrating voice conferencing, HPW data, and remote radio configuration and control into a single, robust platform. Our latest Network Radio Gateway software NRG5 and the new Compact Radio Interface Board (CRIB) are Non-ITAR export classification ECCN 5A991 and 5D991.

Powered by NRG5 software for Maximum Interoperability

Harnessing the cutting-edge NRG5 technology, the PacStar 466 employs a decentralized mesh network of gateways and clients. This modern infrastructure ensures flawless voice and data support over legacy U.S. Military Combat Net Radios (CNR), Joint Tactical Radio Systems (JTRS), and commercial Land Mobile Radio (LMR) Systems delivering unparalleled interoperability across diverse communication.



Flexible Conferencing with Infinite Scalability Experience unmatched communication flexibility through the PacStar 466 with NRG5's versatile conferencing server. Capable of simultaneously supporting multiple audio sources- including analog, digital, cellular phones, and both military and civilian radios. The system allows for seamless communication in either conference or channel mode. Its advanced radio bridging connects like and dissimilar radio devices effortlessly.

NRG5 Fault-Tolerant and Efficient Multiprocessing Boost your operational efficiency with the NRG5-enhanced multiprocessing capabilities. NRG5 software can share workloads across all connected appliances ensuring a robust fault tolerant system and offering infinite scalability. This means you can expand your communications network without compromising performance or reliability.

Elevate Your Mission-Critical Communications Today Step into the future of seamless, scalable, and secure communications with the PacStar 466. It's not just an upgrade-it's a transformation of your entire communications infrastructure.

FEATURES

- Based on the proven technology from our Deployable System DS-04v3 with four (4) radio interface ports.
- Compact design with a rugged fanless enclosure - small enough for mobile, manpack, or aircraft use.
- Expand up to 12 radio systems by interconnecting multiple PacStar 466 modules.
- Adapts from small command posts to full enterprise integration.
- Easy to use and deploy - turns dissimilar radios into more uniform networked resource.
- Front panel indicators for system and status tri-color LEDs.
- Versatile Graphical User Interface - Windows 10/11 Support.
- Enhanced radio support - remote data and radio control.
- Command and Control Monitoring - full recording and playback of all radio voice and conference audio.



All trademarks are property of their respective owners.

SALES@PARRAID.COM
WWW.PARRAID.COM


INTERNATIONAL_SALES@PARRAID.COM
+1 (301) 690-0690



44150 SMARTRONIX WAY STE 100
HOLLYWOOD, MD 20636

- **Scalable and Decentralized:** Adapts from tactical-standalone command posts to full enterprise integration across IP subnetworks.
- **Interoperability:** Compatible with a wide range of unified communications protocols and systems, including Motorola WAVE, TOCNET, ICE, Cisco Call Manager, AT&T FirstNet, Access Net, LTE, and more.
- **Enhanced Radio Support:** Offers remote data and radio control for both software-defined radios and legacy systems, including LMRs.
- **Can support Remote Radio Control, PPP, Sync, Async, L3Harris CPA, and HPW WMT.**
- **Future-Ready Transport:** Supports a range of transport methods including 5G, Fiber, Mesh Radio, Software-Defined Radio, Starshield, and tactical LANs.
- **Cost-Effective:** Enables shared use of expensive radios across multiple users, reducing overall costs.

DATA	VOICE
• AN/PRC-160	• Iridium PTT
• AN/PRC-163	• Kenwood
• AN/PRC-167	• Any radio with NATO U-229 and U-329 audio connector
• AN/PRC-152/152A	
• AN/PRC-117G	• HMS
• AN/PRC-137	• Motorola XTL-5000
• AN/PRC-150	• Motorola XTS-5000
• AN/PRC-148	• Motorola XTVA
• RF-5800	• Motorola Micom 3R
• AN/PRC-117F	• Ratheon ACU-1000

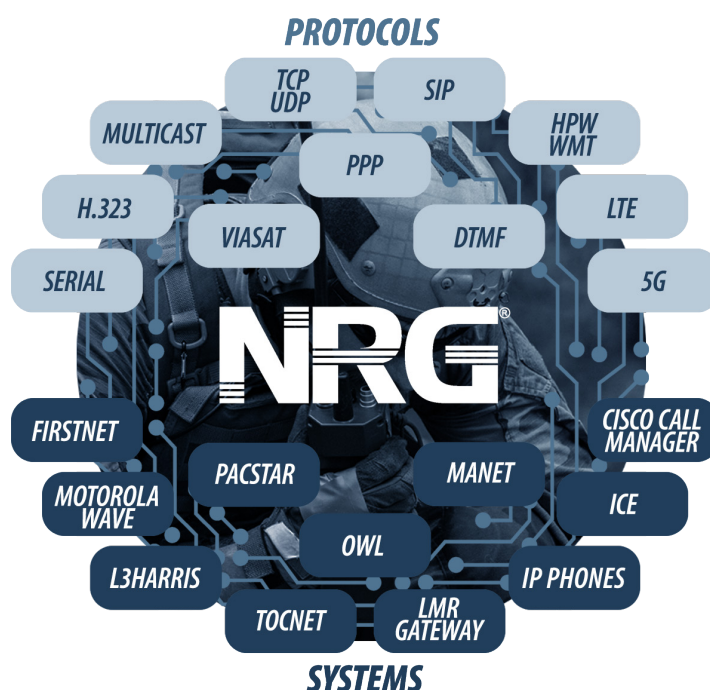

- Dimensions: 5.3" x 7.0" x 1.6"
- Weight: 2.2 lbs
- Snap together connector provides DC pass-through for powering additional PacStar 400-Series modules
- Fanless design for quiet operation, high reliability and low power draw
- Operational temperature -20°C to 70°C
- Tested to MIL-STD 810 and MIL-STD 461 (contact PacStar for details)



- Worldwide AC power input (with adapter cable)
- Two (2) radio battery connectors for AN/PRC-152/148 snap on radio batteries; hot-swappable.
- Interoperable with PacStar 400-Series power snap-together connector and 400-Series Smart Chassis.
- Power Draw: 14 Watts