

RUGGED USB REPEATER (RUR™)

A COMPACT, RUGGED DEVICE FOR EXTENDING USB CONNECTIONS

The Parraid Rugged USB Repeater is a device that reliably extends USB connections. While USB is a widely used connection, it is limited to a length of only 5 meters (16.4 feet), many installations need a longer cable run. Each RUR extends a connection between USB host and USB device, and multiple RUR devices can be added end-to-end to provide even more interface distance. The RUR is USB powered and requires no external power sources. The product is fully USB 2.0 high-speed compliant. Designed to operate in harsh battlefield conditions, the product is certified MIL-STD-810D, MIL-STD-464C, and MIL-STD-461F.





FEATURES


- 5 meters (16.4 feet) of USB extended length per RUR
- Compact size and lightweight
- Bus powered with USB
- Rugged packaging; designed to meet MIL-STD-810D requirements
- Secure, high performance aircraft style connectors
- EMI/RFI protection designed to meet MIL-STD-461F requirements
- Electrostatic discharge protection to meet MIL-STD-464C requirements
- Finished in Chemical Agent Resistant Coating (CARC)
- USB 2.0 specification compliant
- Multiple RURs can be linked end-to-end
 - 5 RURs for self-powered USB devices
 - 2 RURs for bus-powered USB devices
- No special USB drivers required, simple plug-in installation
- Transparent to software applications

COMPLIANCE CERTIFICATIONS

- 90182-100 Production Test
- Explosive Atmosphere Analysis, October 2017
- Electromagnetic Compatibility Criteria, MIL-STD-461F, May 2018
- ESD Discharge, MIL-STD-464C, May 2018
- Environmental Criteria, MIL-STD-810D, May 2018
- Parraid Rugged USB Repeater MIL-STD Report available upon request

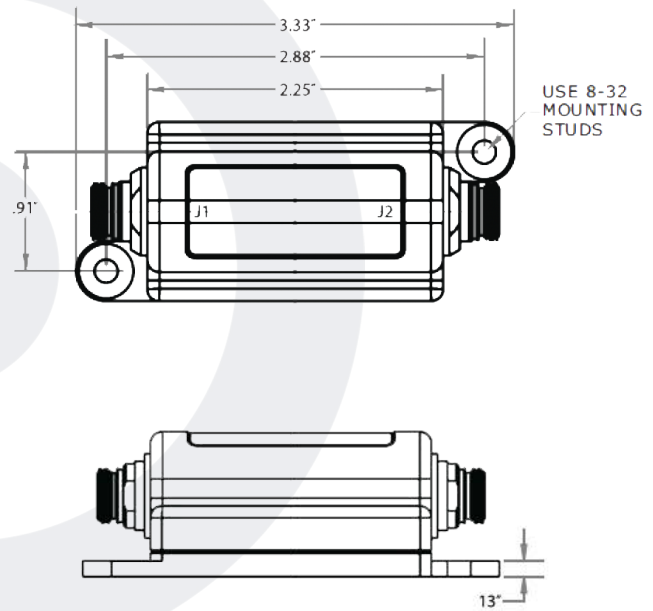

MULTIPLE RURs TO EXTEND LINK

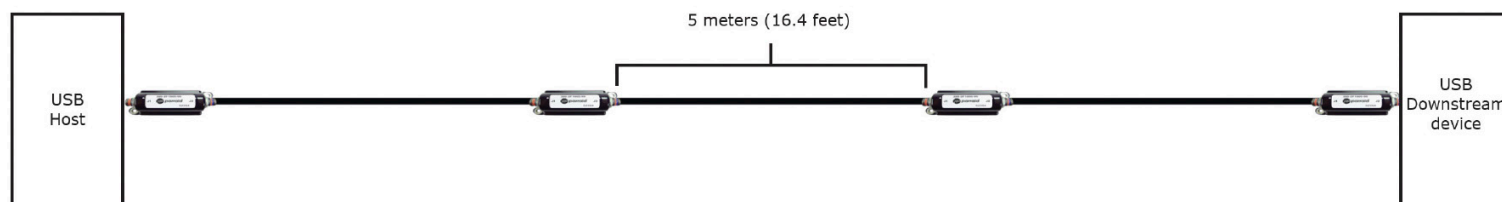

SPECIFICATIONS

	Minimum	Maximum
Extended Cable Distance	0 Meters	5 Meters
USB Ports	(1) Upstream, (1) Downstream	
Upstream Cable Connector	Lemo FGS.0M.305.XLMT	
Downstream Cable Connector	Lemo FGN.0M.305.XLCT	
Upstream Port Speed	High-speed (480 Mb/s) or full-speed (12 Mb/s) hosts	
Downstream Port Speed	High-speed, full-speed, or low-speed devices	
Power Source	USB bus power	
Input Voltage (upstream)	+5VDC nominal	
Input Voltage range	+4.5VDC	+5.5VDC
Output Voltage (downstream)	+5 VDC nominal	
Power (consumption)		30 mA @ 5 VDC, 0.15 watts
Temperature (operating)	-53°C	+70°C
Temperature (storage)	-62°C	+125°C
Humidity (non-condensing)	5%	95%
Cooling	Conduction/Convection via case	
Weight	2.7 ounces	
Certifications	MIL-STD-810D, MIL-STD-464C, MIL-STD-461F	