



G2e™ & G2e-HYBRID DATA RECORDER / REPRODUCER

The industry standard of high-speed Ch 10 recording systems

The IMUX G2e and the IMUX G2e Hybrid (G2eH™) have many unique features such as supporting all industry-standard telemetry signal types, the ability to record two Chapter 10 files simultaneously – local and/or remote, simultaneous playback, and on-the-fly channel adjustment. All units can be equipped with optional integrated RF receivers, bit synchronizers, best source selection, and real-time decom, processing, and display capabilities.

The new IMUX G2e Hybrid is equipped with all the existing powerful features the IMUX G2e has to offer plus the capability to input TMoIP channels (218-20 or CH10 / 11 UDP) directly into the recorder. This gives the G2eH the capability to record all channels (TMoIP Inputs and PCM Signal Inputs) as IRIG 106 Chapter 11 PCM format.

The G2eH dynamically converts TMoIP 218-20 inputs to Chapter 10 packets while recording, which allows for the G2eH, G2e, or any other CH10 reproducer to output baseband (PCM Data & Clock) from the recorded Chapter 10 file. The recorded file will also work with any Chapter 10 / 11 compliant tool set for processing and analysis. This unmatched feature gives the user a single box solution to record and/or reproduce legacy and present-day channel types all together.

The IMUX G2e/G2eH can be configured as a rackmount or portable unit. Rackmount configuration options include a compact 2U chassis for up to 4 channels and a robust 4U chassis for up to 32 channels. Touch screen and ruggedized systems for mobile applications and transport cases are available.



FEATURES

BEST DATA ENGINE (BDE)

For BDE users, the TMoIP inputs can now be frame aligned and bit voted along with Chapter 4 PCM data.

FAST

- 16 gigabit data bus
- 2 gigabit/sec throughput
- High-speed removable SSD media

SCALABLE

- Multi-channel support for TMoIP (218-20 and CH10 UDP)*, PCM, Video (SD and HD), 1553 Format I and II, ARINC, Ethernet, Audio, UART, GPS / IRIG Time, and others
- Stand-alone recorder to fully networked systems with remote capabilities
- Custom parameter data displays, alarm and status indicators
- Best Data Engine for highest quality data stream creation
- Available integrated receivers and/or bit synchronizers
- Multi-core decom and parameter processing
- Integrated Low Latency Hot Mic audio output
- Data/signal status quick reviews
- Available integrated GPS time support

*G2eH models only

All trademarks are property of their respective owners.

SALES@PARRAID.COM
WWW.PARRAID.COM

INTERNATIONAL_SALES@PARRAID.COM
+1 (301) 690-0690



44150 SMARTRONIX WAY
HOLLYWOOD, MD 20636

FLEXIBLE

- Remote and local control
- Dynamic channel allocation
- PCM "Strip and Ship" capabilities
- Available integrated data mining and data fusion
- Quick and easy save and recall individual channel setups
- User-friendly PCM spreadsheet configuration
- Simultaneous playback and record (SPAR) capability
- Throughput data monitoring and record operations
- Integrated TCP/IP and UDP Network Client Support
- Integrated data reformatting and production creation
- Event flags and individual channel start & stop controls
- Integrated built-in Bit Error Rate (BER) test
- Simultaneous Data Connections: local and remote media clients
- Integrated IRIG Time Code Translator / Generator channel capacity
- Front panel removable drives; RAID support; FIPS 140-2 and standard media



G2e/G2eH Portable Rugged Recorder Processing System



*G2e/G2eH Rugged Recorder Processing System w/ Touchscreen
Example Rear Panel Connector Configuration*


SYSTEM INCLUDES

- Standard keyboard with integrated touchpad pointing device and as-needed chassis slides and break-out signal I/O cables
- Monitors, rack-support, and enclosures available
- Optional OMEGA NExT and Clarity software for multi-stream processing, display, network distribution, and parameter data extraction
- Optional ODE software for secure mining and exploitation of large multi-file data sets


Refer to separate G2e/G2eH configuration, OMEGA NExT and ODE software specification sheets for more detailed information.



NExT Real-time Data Processing

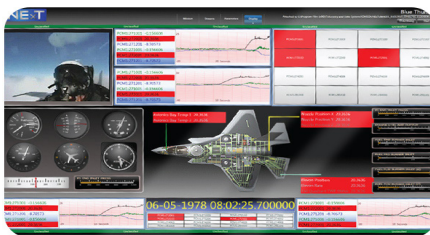

Clarity Display Software

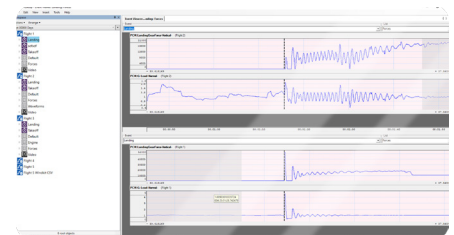

ODE Data Mining Software



DESIGN | BUILD | SUPPORT

Aggregate G2e/G2eH capability is configuration-dependent; G2e/G2eH is available with a wide range of optional integrated features.

SALES@PARRAID.COM
WWW.PARRAID.COM

INTERNATIONAL_SALES@PARRAID.COM
+1 (301) 690-0690



G2eH-DR-PF Rev 03

Appraisal # 65620 | Exp. Aug 18, 2026

44150 SMARTRONIX WAY
HOLLYWOOD, MD 20636