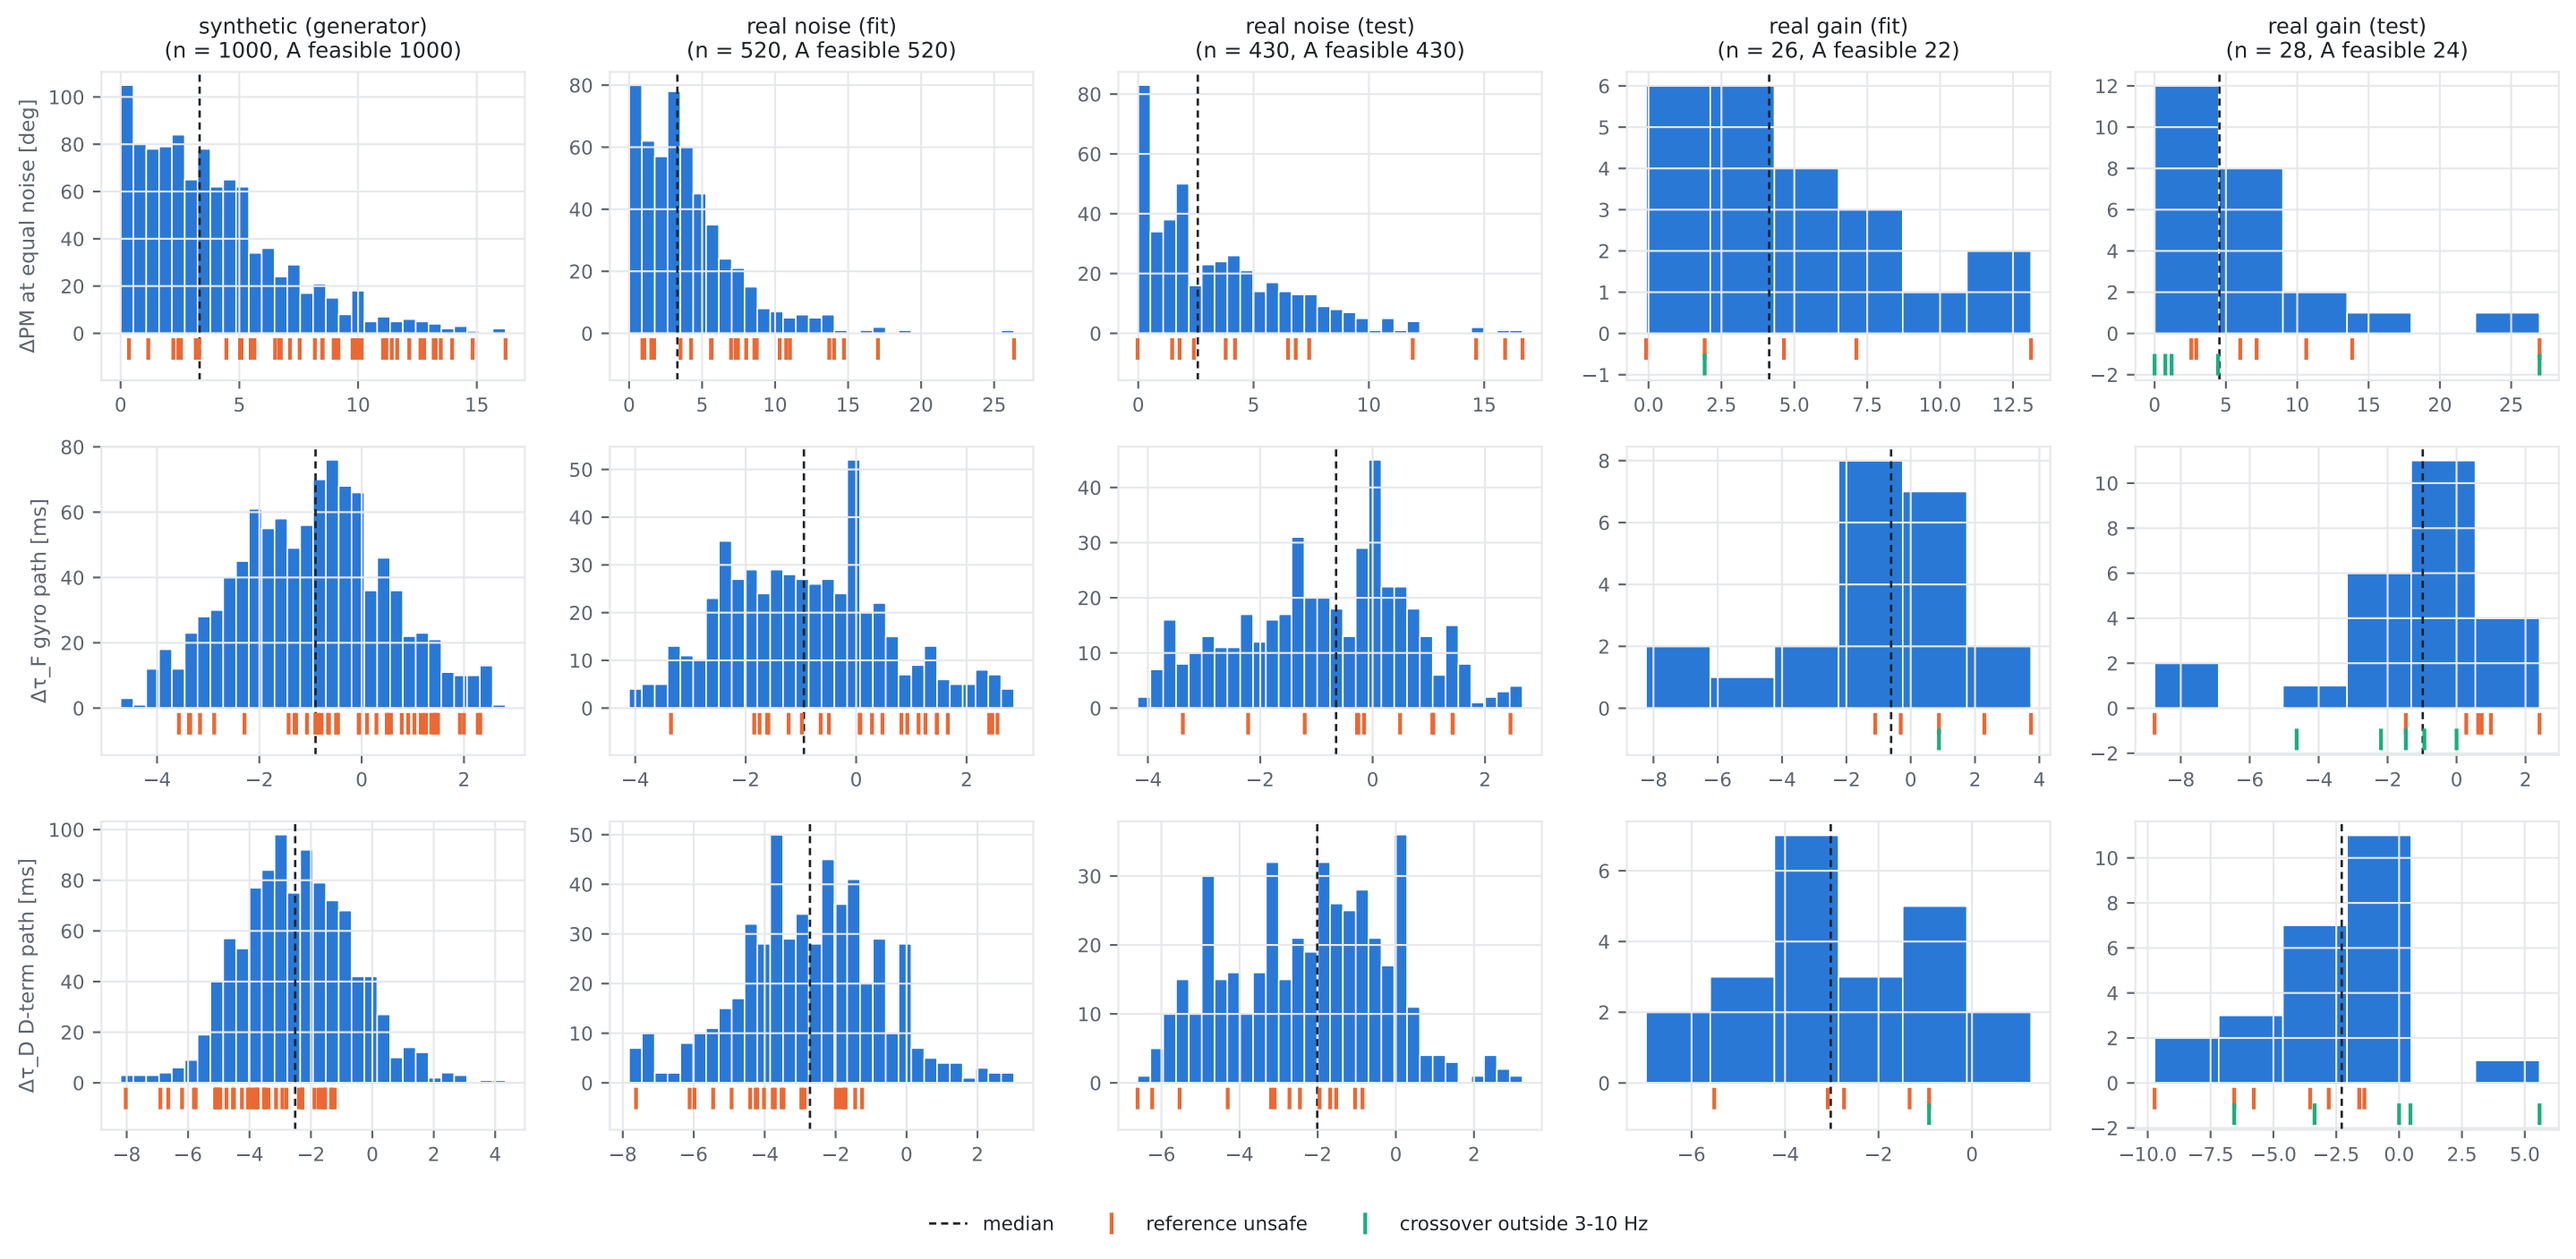
synthetic (generator)
(n = 1000, A feasible 1000)
real noise (fit)
(n = 520, A feasible 520)
real noise (test)
(n = 430, A feasible 430)
real gain (fit)
(n = 26, A feasible 22)
real gain (test)
(n = 28, A feasible 24)
ΔPM at equal noise [deg]
Δτ_F gyro path [ms]
Δτ_D D-term path [ms]
median
reference unsafe
crossover outside 3-10 Hz