



GENERAL NOTE


1. ALL KITCHEN EXHAUST DUCTS ARE TO BE INSTALLED AT 0.05% GRADE RAISE TO THE RISER.
 2. ALL KITCHEN EXHAUST DUCTWORK TO BE MADE OF GALVANISED STEEL OF MIN 1.2mm THICKNESS.
 3. ALL SUPPLY-AIR SIDE CANVASES WERE INSULATED TO PREVENT SWEAT.
 4. FOR THE THERMOSTAT SET OUTS AND HEIGHTS ON THE WALLS, REFER TO ARCHITECTURAL WALL ELEVATION
 5. FOR GRILLE SET OUT, REFER TO ARCHITECTURAL REFLECTED CEILING PLAN (RCP).

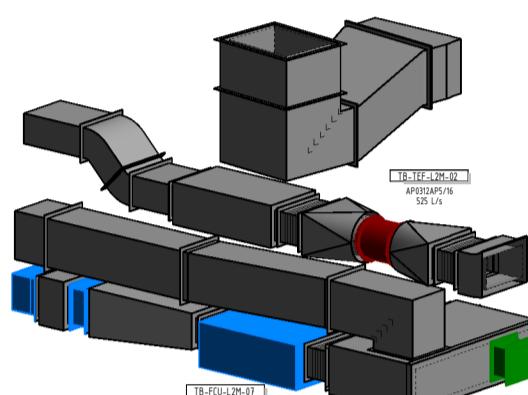

VIEW L02_M-01
NTS

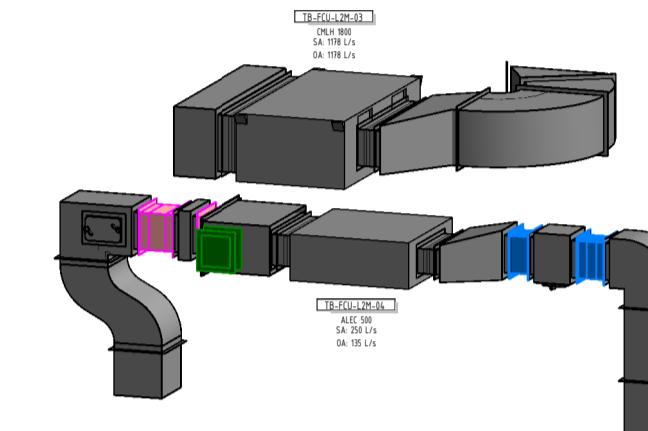

VIEW L02_M-
NTS

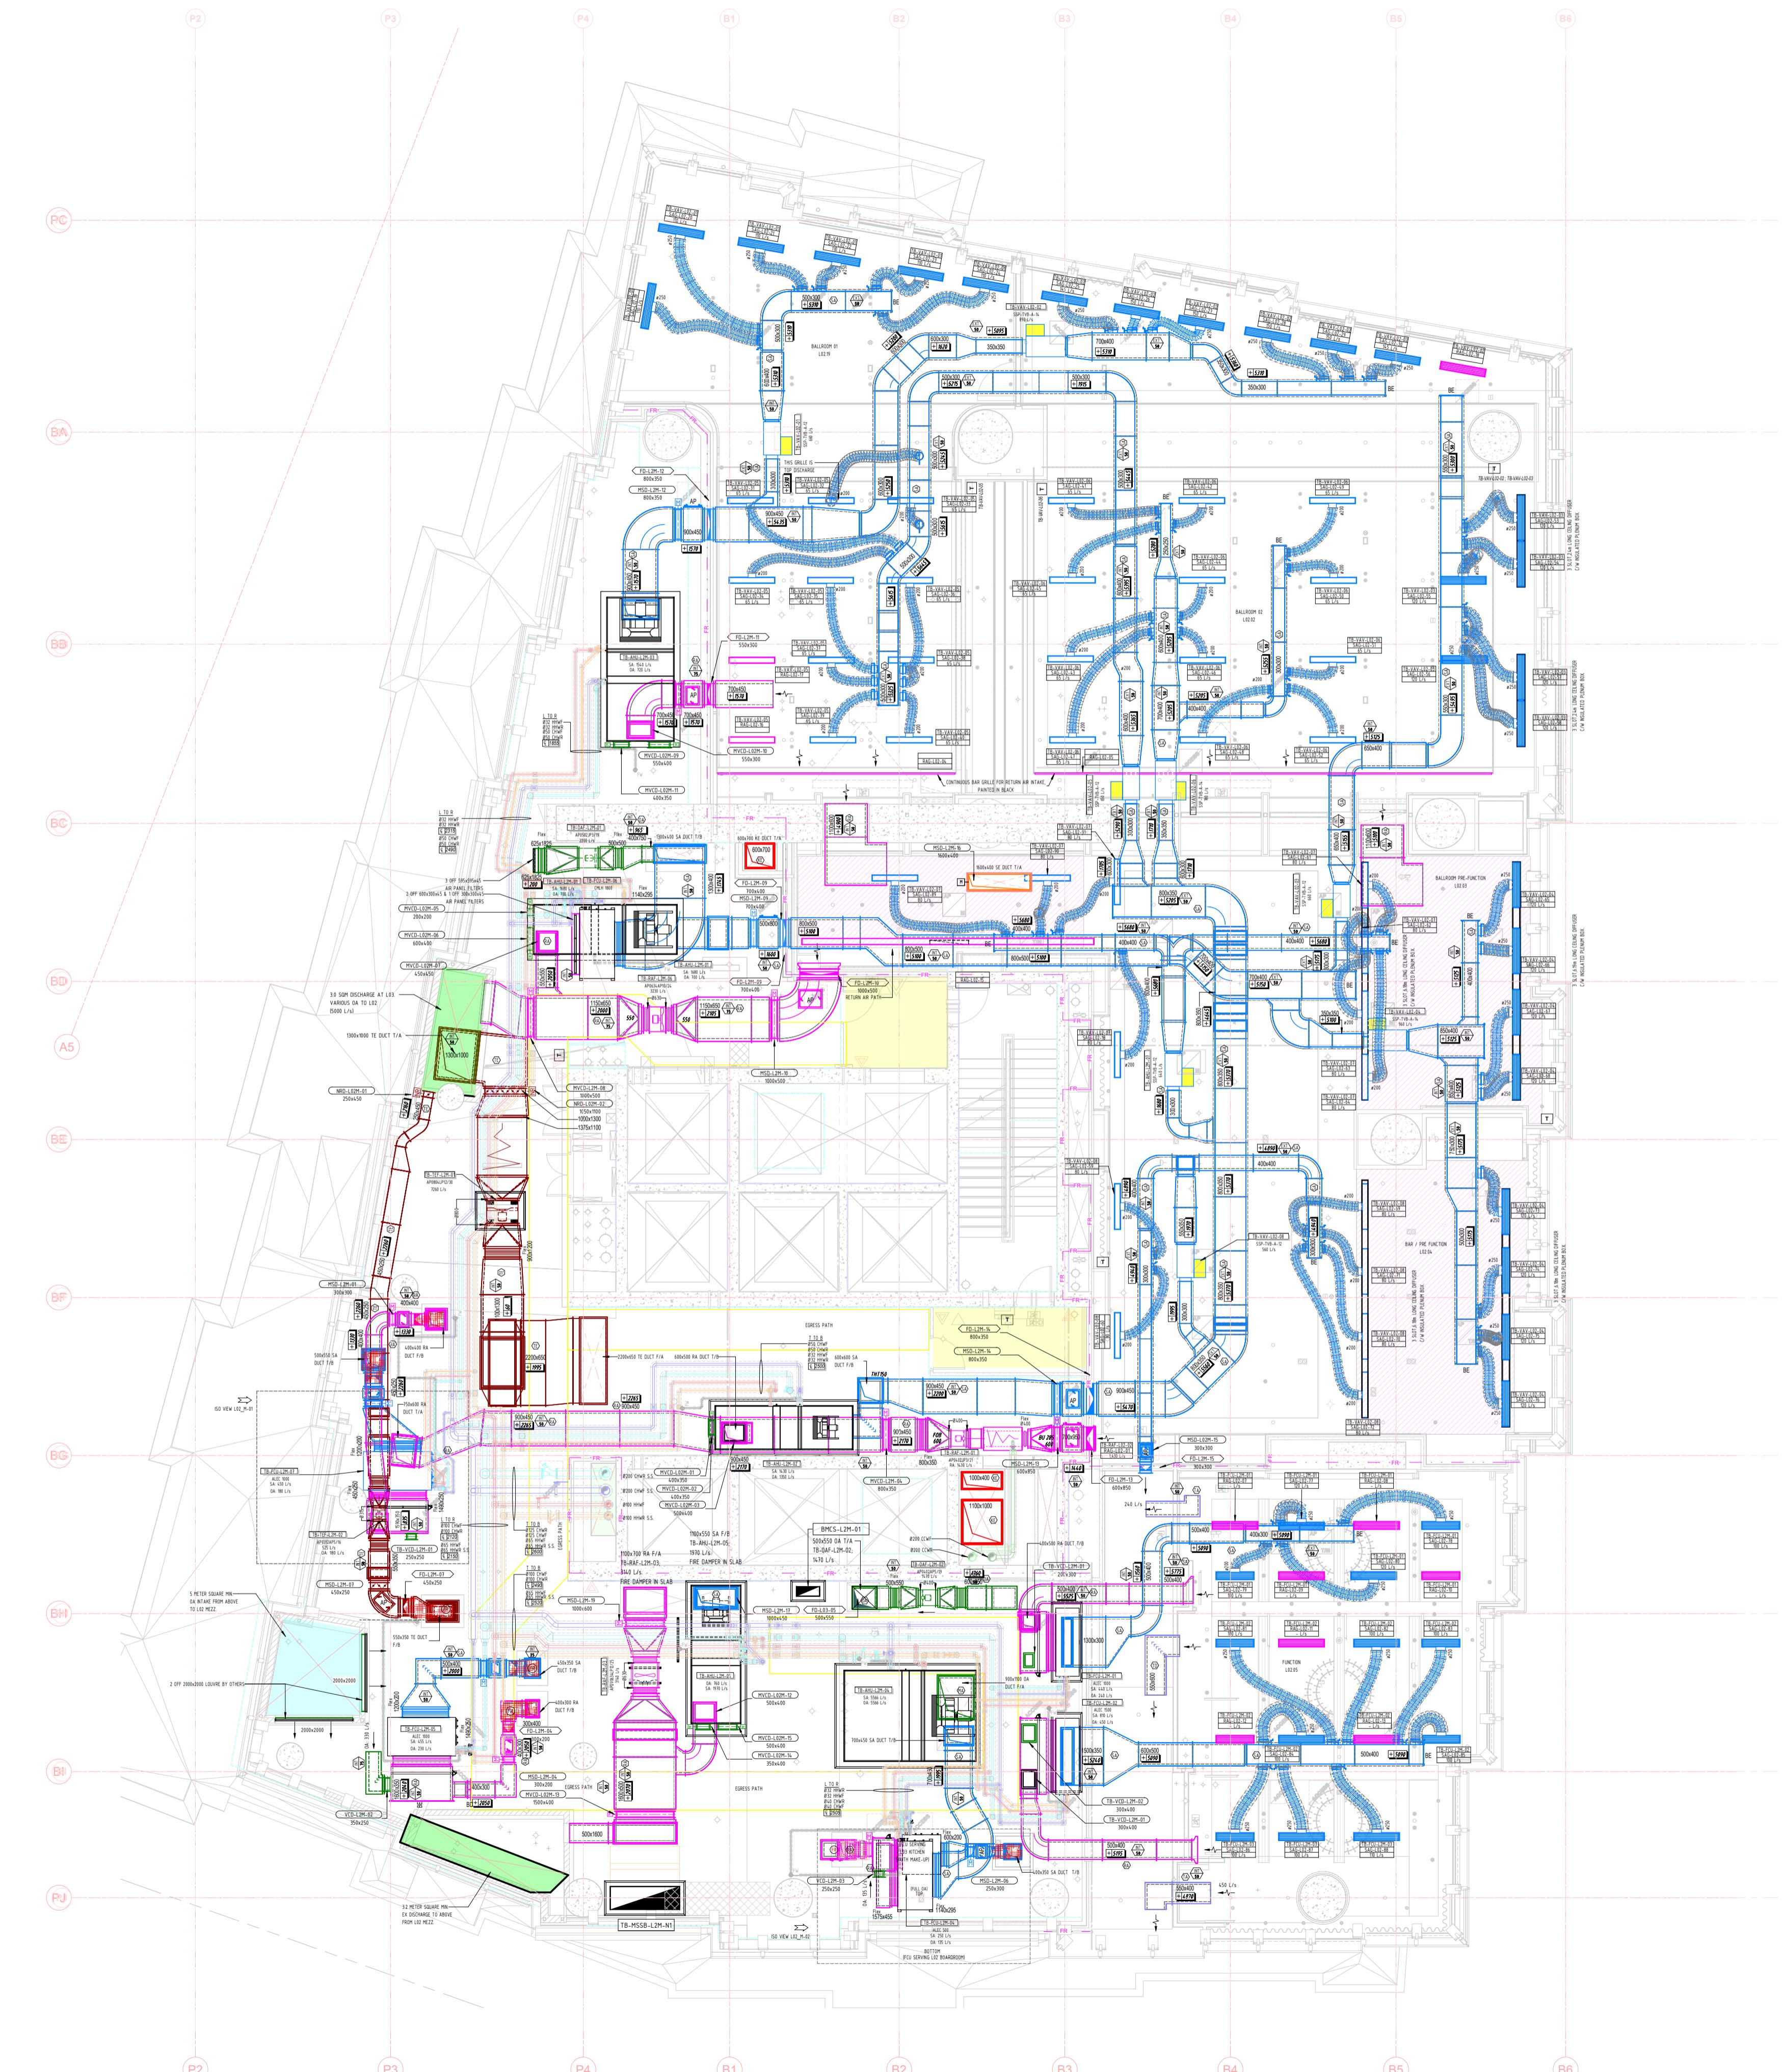

| Rev | Date | By | Revision Notes |
|----------------------|------|----|--------------------------|
| INTERNAL CHECKED BY: | | | CLIENT CHECKED BY: DATE: |

INTERNAL CHECKED BY: CLIENT CHECKED BY: DATE:

0 1 2 3 4 5 m
 SCALE 1:100 @A1

DRAWING TITLE:

SUITABILITY:

DRAWING NUMBER

FILE LOCATION: