

REV.	DESCRIPTION	DATE	APPROVED
F	Added Note 4	06/19/09	T. Y.
G	Updated Note 4 with Table 3	07/27/10	T. Y.
Н	Remove PPS and GF30 Material	11/02/11	T. Y.
J	Removed Material Code	05/28/16	J. C.

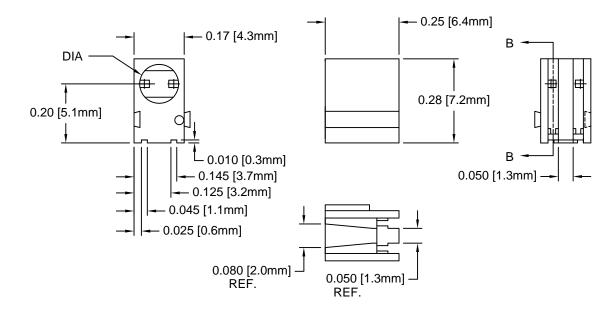

- 0.078 [2.0mm]		
R.005 [R0.1mm]		
SECTION B-B		

0.185 [4.7mm] ———————————————————————————————————				
0.172 [4.4mm] Holder Pitch				
0.100 [2.5mm] LED Lead				
Recommended Mounting Holes				



PART NO.	DIA
H-100C	.132 (3.4mm)
H-100C-1	.150 (3.8mm)
H-101C	.132 (3.4mm)
H-101C-1	.150 (3.8mm)
H-102C	.132 (3.4mm)
H-102C-1	.150 (3.8mm)
H-103C	.132 (3.4mm)
H-103C-1	.150 (3.8mm)

- 2. MATERIAL 1: NYLON 6/6, 94V-0, BLACK.
- 1. GENERAL SPECIFICATIONS: BIVAR MOLDED COMPONENT SPECIFICATION BV00-E101.

	STANDARD TOI (UNLESS OTHERWIS DECIMALS .X + .1	E SPECIFIED) ANGULAR	BIVAR® 4 THOMAS, IRVINE, CA. 92618
	.XX ±.1	X° ± 1°	TEL: (949) 951-8808 FAX: (949) 951-3974
	.XXX ± .005	$\oplus \Box$	TITLE: T-1 (3mm) LED HOLDER, 90° MOUNT, INTERLOCKING VARIABLE DIAMETER
	DESIGNED:	DATE:	PART NO: REVISION:
	M. Chen	01/21/03	H-10XC-X J
OTTEOTIES.		DATE:	CAGE CODE: 32559 SHEET # 1 OF 1
	D. Green 01/21/03		CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.