

## Simple, Highly Reliable Industrial Network Communication



## ISE3018D Unmanaged Industrial Ethernet Switch

· 18 Ports

· Gigabit Combo

· IP30

· Wide Temperature

# 1. Product Overview

ISE3018D is an 18-port unmanaged industrial Ethernet switch built for power, transportation, and industrial control environments.

## Product Features:


- **Industrial Reliability:** Robust metal casing, fanless design, IP30 protection, wide-temperature operation.
- **Excellent EMC:** Outstanding electromagnetic compatibility and radiation performance.
- **Redundant Power:** Dual input power design (9.6–60 VDC & 18–30 VAC) for high availability.
- **QoS & BSP:** DIP switch-enabled Quality of Service and Broadcast Storm Protection.
- **Easy Deployment:** Plug-and-play, DIN rail mountable, compact size for quick deployment.

## Key Technical Specifications

| Parameter             | Specification                                                              |
|-----------------------|----------------------------------------------------------------------------|
| Type                  | Unmanaged Industrial Ethernet Switch, Layer 2, Store-and-Forward           |
| Ports                 | 16 x 10/100 BaseT + 2 x 100/1000Base(X/T) Gigabit Combo (SFP not included) |
| Switching Performance | 8.8 Gbps backplane bandwidth, 8K MAC, 4 Mbit buffer, <10 us latency        |
| Dimensions / Weight   | 72 x 140 x 110 mm / 1.2 kg                                                 |
| Power                 | 9.6-60 VDC & 18-30 VAC, redundant dual inputs, 10 W                        |
| Environment           | -40 to +75 C operating, IP30, fanless                                      |

| Parameter      | Specification                         |
|----------------|---------------------------------------|
| EMC            | IEC 61000-4-2/3/4/5/6/8/18, Class 3-5 |
| Certifications | CE, FCC, UL                           |

## 2. Product Dimensions

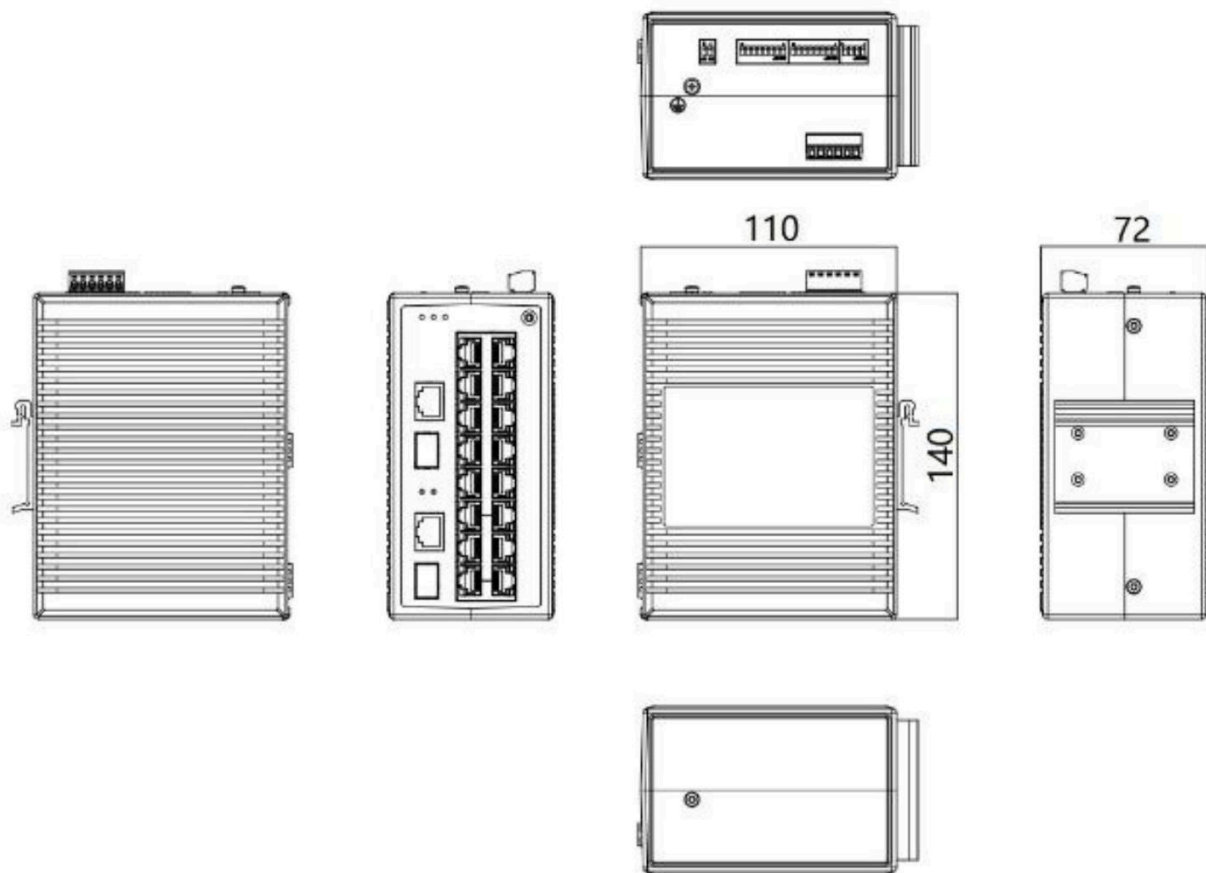

Dimension Diagram

Note:

1. All dimensions are in millimeters (mm).
2. All dimensions are approximate and **for reference only**.
3. The dimensions shown in the figure **shall not be used for production or processing**.
4. Dimensions must comply with part and manufacturing tolerance requirements.
5. Dimensions are subject to change without notice.

### 3. Hardware Specifications

| Category/Parameter          | Specification                           |
|-----------------------------|-----------------------------------------|
| <b>Physical Performance</b> |                                         |
| Enclosure                   | Fully enclosed seamless metal enclosure |
| Dimensions (W × D × H)      | 72 mm × 140 mm × 110 mm                 |
| Weight                      | 1.2 kg                                  |
| Mounting Method             | DIN-rail mounting                       |
| Cooling Method              | Fanless cooling                         |
| Protection Grade            | IP30                                    |
| Storage Temperature         | -40 °C ~ +85 °C                         |
| Operating Temperature       | -40 °C ~ +75 °C                         |
| Humidity                    | 5 ~ 95% (non-condensing)                |
| <b>Hardware Performance</b> |                                         |
| Backplane Bandwidth         | 8.8 Gbps                                |
| MAC Table Size              | 8K                                      |
| Packet Buffer Size          | 4 Mbits                                 |
| Processing Type             | Store-and-Forward                       |
| Switching Delay             | <10 μs                                  |
| <b>Power Parameters</b>     |                                         |

| Category/Parameter                     | Specification                                                                                                                                                                                      |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating Voltage                      | 9.6–60 VDC & 18–30 VAC, Redundant dual input                                                                                                                                                       |
| Power Consumption                      | 10 W                                                                                                                                                                                               |
| Protection                             | Overload Current Protection, Reverse Polarity Protection                                                                                                                                           |
| <b>Electromagnetic Characteristics</b> |                                                                                                                                                                                                    |
| EMS                                    | IEC(EN)61000-4-2, Class 3; IEC(EN)61000-4-3, Class 3<br>IEC(EN)61000-4-4, Class 3; IEC(EN)61000-4-5, Class 3<br>IEC(EN)61000-4-6, Class 3; IEC(EN)61000-4-8, Class 5<br>IEC(EN)61000-4-18, Class 3 |
| <b>Certifications</b>                  |                                                                                                                                                                                                    |
| Certifications                         | CE, FCC, UL                                                                                                                                                                                        |
| <b>Warranty</b>                        |                                                                                                                                                                                                    |
| Warranty Period                        | 5 years                                                                                                                                                                                            |
| MTBF                                   | 35 years                                                                                                                                                                                           |

## 4. Ordering Guide

| Model                 | Description                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ISE3018D-P-2GC-16T-24 | 18-port Layer 2 unmanaged Industrial Switch. 16 × 10/100BaseT Ports + 2 × 100/1000Base(X/T) Combo Ports (SFP not included). DIP-enabled Sound & Light Alarm Output & 1 Alarm Relay port (1A@24VDC). IP30 Protection Class, Operating Temperature from -40°C to +75°C. Dual 12/24/48 VDC (9.6–60 VDC) & 24VAC (18–30 VAC) Power Input (Only connect to class 2 power supply). |

## 5. Contact Us

- Website: [InHand Networks](https://www.inhandnetworks.com)
- Copyright: ©InHand Networks All rights reserved