

Transform Connectivity, Unlock Possibilities



FWA12 5G Router

· 5G

· Wi-Fi 7

· AI-Powered Management

· Enterprise Security

1. Product Overview

The FWA12 5G router delivers ultra-fast connectivity with up to 7.01 Gbps downlink and 2.5 Gbps uplink. Supporting Wi-Fi 7 speeds up to 5000 Mbps and 128 device connections, it ensures seamless performance for business networks with enterprise-grade firewall, VPN security, and AI-powered cloud management.

Features and Advantages:


- **High-Performance 5G:** Quad-core A55, 5G R16 (SA/NSA), 7.01 Gbps DL / 2.5 Gbps UL, 4 DL CA + 2 UL CA, 300 MHz bandwidth
- **Next-Gen Wi-Fi 7:** Dual-band 2.4 / 5.8 GHz, 5000 Mbps peak rate, 128 concurrent connections, enhanced MU-MIMO
- **Enterprise Security:** IPsec and L2TP VPN, advanced firewall, traffic management, security logs, anomaly detection
- **AI-Driven Cloud Management:** InCloud Manager with zero-touch provisioning, AI assistant with 7×24 support
- **Built for Enterprise Agility:** Abundant features, flexible configuration, high network resilience

Core Technical Specifications

Technical Item	Specification
Cellular	5G SA/NSA + LTE Cat19; up to 7.01 Gbps DL / 2.5 Gbps UL (5G)
Cloud Management	InCloud Manager; AI assistant (7×24)
VPN	IPsec, L2TP
Network	IPv4/IPv6
Wi-Fi	Wi-Fi 7 (802.11be), 2.4/5.8 GHz, 5000 Mbps
Throughput / Users	Stateful firewall 2 Gbps; up to 220 users (128 Wi-Fi)

Technical Item	Specification
SIM	1 × eSIM + 2 × Nano-SIM (hot-swap)
Ethernet / USB	2 × 2.5 GbE (WAN/LAN, dual-LAN); USB-C 2.0
Antennas	6 × external + 2 × internal cellular; 3 × internal Wi-Fi
Power	12 V / 3 A; ≤24 W
Dimensions	236 × 172.5 × 58.5 mm (9.29 × 6.79 × 2.3 in)
Certification	FCC, IC, PTCRB, Verizon, T-Mobile, AT&T

2. Product Dimensions

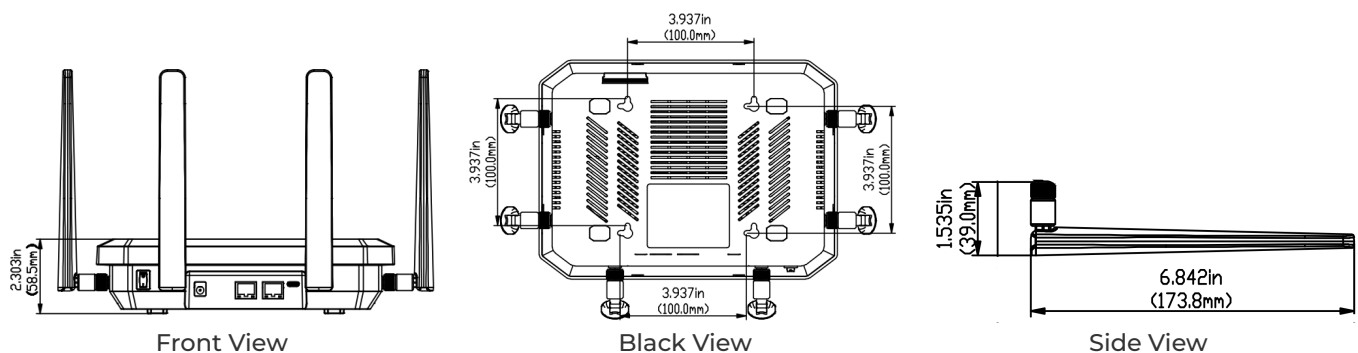

Note:

1. All dimensions are in millimeters (mm), with inches (in) in parentheses.
2. Dimensions (L × W × H): 236 × 172.5 × 58.5 mm (9.29 × 6.79 × 2.3 in).
3. All dimensions are approximate, **for reference only**.
4. Dimensions shown shall not be used for production.

3. Hardware Specifications

Category/Parameter	Specification
Performance Metrics	
Stateful Firewall Throughput	2 Gbps
Recommended Users	220 (128 Wi-Fi devices)
Interfaces	
Ethernet	2 × 2.5 GbE RJ45, WAN/LAN switchable, dual-LAN
USB	1 × Type-C 2.0, HOST and SLAVE modes
SIM	1 × eSIM; 2 × Nano-SIM, hot plug
Reset	Reset button
Power Switch	1 × button
LED	System, Cellular, Signal, WAN, LAN, Wi-Fi
Antenna	6 × external + 2 × built-in antenna; 3 × built-in Wi-Fi antenna
Cellular	
Data Rate	5G SA/NSA: 7.01 Gbps DL / 2.5 Gbps UL; 4G CAT19: 1.6 Gbps DL / 200 Mbps UL
Antenna Freq.	617–5925 MHz
Antenna Gain	617–894 MHz: 2 dBi; 1700–5000 MHz: 4.11 dBi
Wi-Fi	

Category/Parameter	Specification
Frequency	2.4 GHz, 5.8 GHz
Max Bandwidth	5000 Mbps
Protocol	802.11 be/ax/ac/b/g/n, Wi-Fi 7
Antenna Freq.	2400–2500 MHz; 5000–5800 MHz
Antenna Gain	2400–2500 MHz: 4.17 dBi; 5000–5800 MHz: 4.56 dBi
Power	
Input	Circular interface, 12 V / 3 A
Power Consumption	≤ 24 W
Mechanical	
Dimensions	236 × 172.5 × 58.5 mm (9.29 × 6.79 × 2.3 in)
Weight	2.2 lbs
Installation	Wall mounting, desktop mounting
Environment	
Operating Temperature	-10 °C ~ +50 °C (14 °F ~ +122 °F)
Storage Temperature	-40 °C ~ +85 °C (-40 °F ~ +185 °F)
Humidity	5–95 % RH (non-condensing)
Protection	IP20
Physical	
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
Free Fall	IEC 60068-2-32

Category/Parameter	Specification
Certification	
Certification	FCC, IC, PTCRB, Verizon, T-Mobile, AT&T
Warranty	3 years

4. Software Specifications

Category/Parameter	Specification
Cloud Management	
Platform	InCloud Manager
Features	Zero-touch provisioning, centralized management, visualized monitoring
AI Assistant	7×24 support, context-aware problem solving
Network Features	
Access	5G/4G cellular, Ethernet
Dialing	PPPoE, cellular auto redial, dual-SIM switching, APN configuration
Link Backup	Packet-by-packet load balancing, link priority adjustment
Link Monitoring	Real-time delay, jitter, packet loss, throughput monitoring
IP Protocol	IPv4 / IPv6
Applications	VLAN, DHCP Server/Client, DNS, DDNS, Fixed Address, IP Passthrough
Interface	Duplex mode, link negotiation, interface enable

Category/Parameter	Specification
Security	
VPN	IPsec VPN, L2TP VPN
Firewall	Access control, port mapping, port forwarding, MAC/IP/port/protocol filtering
Monitoring	
Dashboard	Device info, interface status, traffic analysis
Cellular Signal	Real-time RSSI, RSRP, RSRQ, SINR, etc.
Logs	System logs, diagnostic logs, device events, email alerts
Wi-Fi	
Mode	802.11 be/ax/ac/b/g/n, Wi-Fi 7, AP mode
Policy	
Policy	Policy routing, traffic shaping
Self Recovery	
Watchdog	Software and hardware watchdog, self-healing
Remote Maintenance	
Access	Web UI, CLI remote access and control
Cloud	Remote maintenance of PCs, monitoring equipment, servers, etc.
Diagnostics	Ping, Traceroute, packet capture, diagnostic logs
Config	Configuration import and export

5. Ordering Information

Model Code

Model code: FWA12-\WMNN\

\WMNN: Type & Module

Product Models

Model	Region	Specification
FWA12-NANR	North America	5G Sub-6: n2/5/7/12/13/14/25/26/29/30/38/41/48/66/70/71/77/78 LTE-FDD B2/4/5/7/12/13/14/17/25/26/29/30/66/71; LTE-TDD B38/41/42/43/48
FWA12-EUNR	Europe, APAC	5G Sub-6: n1/3/5/7/8/20/28/38/40/41/75/76/77/78 LTE: B1/3/5/7/8/20/28/32/38/40/41/42/43/46(LAA) WCDMA: B1/5/8

6. Contact Us

- Website: [InHand Networks](https://www.inhandnetworks.com)
- Copyright: © InHand Networks. All rights reserved.