

Stay Ahead with Wi-Fi 6: Fast, Reliable, and Secure



EAP600 Enterprise Access Point

· Wi-Fi 6

· High Performance

· Cloud-Managed

· Mesh Networking

1. Product Overview

The EAP600 is a high-performance indoor dual-band Wi-Fi 6 Access Point (AP). With its powerful Wi-Fi 6 capability, it provides increased connection density, lower latency, enhanced coverage range, and stronger security for retail stores, hotels, enterprise offices, and various business scenarios. Combined with the InCloud Manager platform, it enables centralized management and monitoring of distributed EAP600 devices.

Features and Advantages:


- **Embrace New Network Experience with Wi-Fi 6:** Supports 802.11b/g/n/ac/ax standards with dual-frequency concurrency; 5GHz band up to 2.4Gbps, dual-band concurrent up to 2974Mbps; 8 SSIDs per band, high-density access
- **Fast Deployment, Flexible Mesh Networking:** Mesh networking for distributed self-organizing network, enhanced coverage and reliability
- **Perfect Security Strategy:** WPA-PSK/WPA/WPA2/WPA3 authentication, guest/business network isolation, MAC whitelist/blacklist filtering
- **Cloud-Managed:** InCloud Manager for centralized management and monitoring
- **Wide Application:** Retail stores, clothing stores, digital arcades, coffee shops, fast food restaurants

Core Technical Specifications


Technical Item	Specification
Cloud Management	InCloud Manager with centralized management, unified device access, zero-touch deployment, and batch upgrade management
Wi-Fi Performance	Wi-Fi 6 (802.11b/g/n/ac/ax), dual-band concurrent up to 2974 Mbps (2.4G 574 Mbps + 5G 2.4 Gbps)
SSID & Access Control	8 SSIDs per band, guest/business network isolation, MAC blacklist/whitelist filtering

Technical Item	Specification
Visualization & O&M	Dashboard, topology*, client monitor, Wi-Fi experience, FAT-Routing/FAT-Bridge mode
Recommended Users	Up to 150 users
Memory & Storage	512 MB RAM, 128 MB NAND Flash
Ethernet Interface	1 × Gigabit Ethernet port, 1 × Reset button, 4 × LEDs (PWR/WAN/2.4G/5G)
Radio & Antenna	2 × 2 MU-MIMO, 2 × built-in dual-frequency antenna, no Bluetooth
Power Supply	12 V / 2 A DC, 802.3af PoE
Environment & Compliance	Operating 0 °C ~ +45 °C (32 °F ~ +113 °F), storage -40 °C ~ +70 °C (-40 °F ~ +158 °F), 5%~95% RH, IP30, CE/IC/FCC


2. Product Dimensions

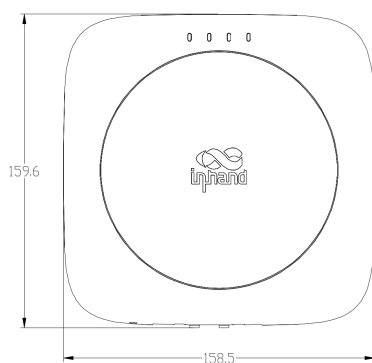

Front View



Interface View

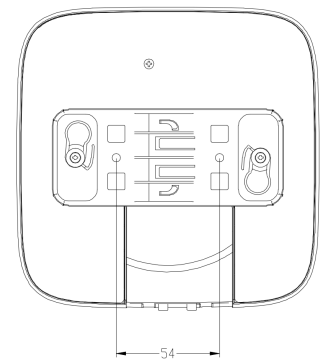

Side View

Note:

1. All dimensions are in millimeters (mm), with inches (in) in parentheses.
2. All dimensions are approximate, for reference only.
3. Dimensions shown shall not be used for production.

3. Hardware Specifications

Category/Parameter	Specification
Performance Metrics	
RAM	512 MB
Flash	128 MB NAND
Recommended Users	≤150
Interfaces	
Ethernet	1 × Gigabit Ethernet port
Button	1 × Reset button
LED	4 × LED (PWR/WAN/2.4GHz/5GHz)
Antenna	2 × built-in dual-frequency antenna
Bluetooth	No
Radio	
Radio	2 × 2 MU-MIMO, dual-band concurrent max 2974 Mbps
2.4 GHz	802.11b/g/n/ac/ax, max 574 Mbps
5 GHz	802.11a/n/ac/ax, max 2.4 Gbps
Power	
Power Supply	12 V/2 A DC; 802.3af PoE
Environment	
Operating Temperature	0 °C ~ +45 °C (32 °F ~ +113 °F)

Category/Parameter	Specification
Storage Temperature	-40 °C ~ +70 °C (-40 °F ~ +158 °F)
Humidity	5% ~ 95%
IP Level	IP30
Certification	
Certification	CE, IC, FCC

4. Software Specifications

Category/Parameter	Specification
Cloud Management	
InCloud Manager	Centralized management, unified device access, zero-touch remote deployment, batch upgrade and management
Network Features	
Network Access	Static IP / DHCP
Standards	802.11b/g/n/ac/ax (Wi-Fi 6)
SSID	8 SSIDs per band
Mesh	Mesh networking supported
IP Protocol	IPv4/IPv6*
VLAN & IP	Custom Wi-Fi network IP address or VLAN ID
Radio Setting	Bandwidth and transmit power configuration
Guest Access	Visitor network for temporary users

Category/Parameter	Specification
Portal*	Radius, mobile phone, and Facebook portal authentication
Security	
Authentication	WPA-PSK, WPA/WPA2/WPA3 (WPA/Enterprise*)
Isolation	Guest network and business network isolation
Access Control	MAC whitelist/blacklist filtering
Visualization	
Dashboard	Device information, interface status, traffic statistics, client access, and alarms
Topology*	AP upstream/downstream topology connection status
Client Monitor	Client traffic and connection duration statistics
Wi-Fi Experience	Wi-Fi client quality analysis
Mode	
Work Mode	FAT-Routing Mode / FAT-Bridge Mode

5. Ordering Information

Product Models

Model	Region	Specification
EAP600-LITE	Global	Enterprise entry-level indoor Wi-Fi 6 AP, 2.4GHz/5GHz dual RF, max speed 2974 Mbps, 1 × Gigabit Ethernet port

6. Contact Us

- Website: [InHand Networks](https://www.inhandnetworks.com)
- Copyright: © InHand Networks. All rights reserved.