

Speed · Security · Stability · Simplicity



ER2000 Enterprise SD-WAN Router

· Enterprise

· High Performance

· Cloud-Managed

· SD-WAN

1. Product Overview

ER2000 is a cloud-managed SD-WAN enterprise-grade router designed for business branches and enterprise offices. Serving as the cornerstone of enterprise digitization, the ER2000 features high-performance data processing capabilities and supports large-scale data transmission and stable operation in complex network environments, offering reliable and convenient central-end network access for enterprise business interconnections.

Features and Advantages:


- **SD-WAN:** Combined with InCloud Manager, quickly builds SD-WAN networking for branch interconnection with flexibility and cost efficiency
- **Centralized Management:** Zero-touch deployment, visualized monitoring, configuration deployment
- **Comprehensive Security:** Firewalls, threat identification, intrusion detection for encrypted traffic insights
- **Outstanding Reliability:** Automatic failover and load balancing, dynamic traffic redistribution for continuous connectivity
- **Enterprise Level:** 6 Gbps throughput, 500+ branch site connections, 1000+ client connections

Core Technical Specifications

Technical Item	Specification
SD-WAN	Hub mode; branch interconnect; 500+ branch sites
Cloud Management	InCloud Manager
VPN	IPsec, L2TP, VXLAN, GRE*, OpenVPN*; 500+ entries
Network	IPv4/IPv6
Throughput / Scale	6 Gbps; IPsec 1 Gbps; 1000+ clients

Technical Item	Specification
WAN Access	Multiple wired links; PPPoE; real-time link detection
Ethernet	WAN: 1 × 10G SFP+ + 1 × GbE SFP + 2 × GbE RJ45 (PoE); LAN: 2 × 10G SFP+ + 2 × GbE Combo + 8 × GbE RJ45 (PoE); 1 × USB 3.0
PoE	10 × PoE output, 802.3at, 150 W
Power	100–240 V AC, 50/60 Hz, 2 A; peak ≤200 W
Dimensions / Install	440 × 290 × 44 mm (17.32 × 11.42 × 1.73 in); rack-mounted
Environment	-10 °C ~ +50 °C (14 °F ~ +122 °F) op.; -40 °C ~ +85 °C (-40 °F ~ +185 °F) stg.; 5–95% RH; IP20
EMC / Certification	EMC Level 2; CE, FCC, IC (under plan)

2. Product Dimensions

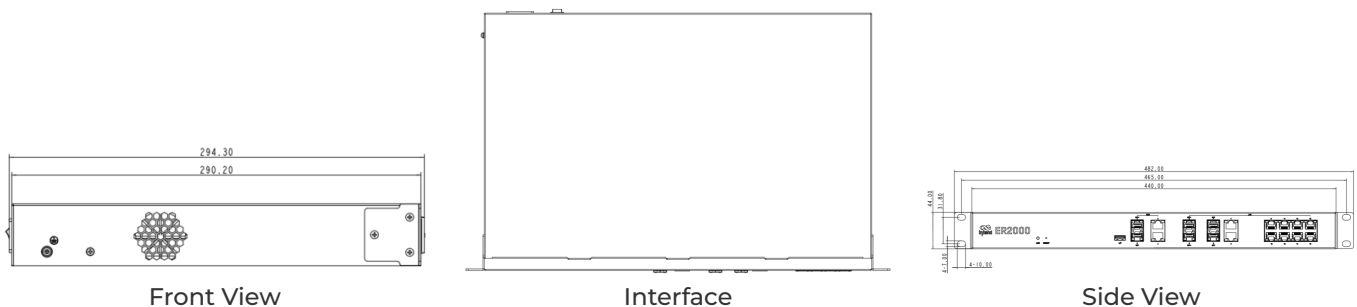

Note:

1. All dimensions are in millimeters (mm), with inches (in) in parentheses.
2. Dimensions (L × W × H): 440 × 290 × 44 mm (17.32 × 11.42 × 1.73 in).
3. All dimensions are approximate, for reference only.
4. Dimensions shown shall not be used for production.

3. Hardware Specifications

Category/Parameter	Specification
Performance Metrics	
Model	ER2000
Throughput	6 Gbps
IPsec VPN Throughput	1 Gbps
Recommended Users	1000+
RAM	4 GB DDR4
Flash	8 GB eMMC
Interfaces	
WAN	1 × 10G SFP+, 1 × GbE SFP, 2 × GbE RJ45 (PoE)
LAN	2 × 10G SFP+, 2 × GbE Combo, 8 × GbE RJ45 (PoE)
PoE	10 × PoE output, 802.3at, 150 W
USB	1 × USB 3.0
Reset	Pinhole reset button
LED	Power, Network
Power	
Input	100–240 V AC, 50/60 Hz, 2 A
Peak Power	≤ 200 W
Mechanical	
Dimensions	440 × 290 × 44 mm (17.32 × 11.42 × 1.73 in)

Category/Parameter	Specification
Installation	Rack-mounted
Protection	IP20
Environment	
Operating Temperature	-10 °C ~ +50 °C (14 °F ~ +122 °F)
Storage Temperature	-40 °C ~ +85 °C (-40 °F ~ +185 °F)
Humidity	5–95 % RH (non-condensing)
Certification	
Certification	Under plan: CE, FCC, IC
EMC	EMC level 2

4. Software Specifications

Category/Parameter	Specification
Cloud Management	
Platform	InCloud Manager
Features	Unified device access, zero-touch remote deployment, bulk remote upgrades, configuration deployment, SD-WAN networking, Connector remote maintenance, two-factor authentication
Dashboard	Device connectivity status, network topology, traffic statistics, interface status, client statistics and analysis, uplink management
Network Features	
Access	Multiple wired link connections

Category/Parameter	Specification
Dialing	PPPoE
Intelligent Links	Real-time link detection
IP Protocols	IPv4, IPv6
Protocols	VLAN, DHCP (Server/Client), DNS, DDNS, Fixed Address, IP Passthrough, STP, ARP, ICMP
VPN	IPsec VPN, L2TP VPN, VXLAN, GRE*, OpenVPN*
SD-WAN	SD-WAN networking
Routing	Static routing
Security	
Firewall	3L inbound/outbound rules, port forwarding, SNAT, DNAT
Remote access control	Supported
Access Control	Black/white list filtering, domain filtering, 802.1X*
Reliability	
Traffic Shaping	QoS by link, IP, and protocol
Upgrades	Scheduled upgrades
Logs	Runtime logs, diagnostic logs
Events	User logins, connection disconnects, device reboots
Alarms	Local email; platform SMS and email
Diagnostic	
Tools	ICMP, packet capture, tracer

Note: Features marked with * are under development.

5. Ordering Information

Model Code

Model code: ER2000-WMNNe

WMNNe: Hardware Specifications

Product Models

Model	Region	Specification
ER2000-PLUS	Global	Throughput: 6 Gbps; VPN throughput: 1 Gbps; 500+ branch site connections, 1000+ client connections; WAN: 1 × 10G SFP+ + 1 × GbE SFP + 2 × GbE RJ45 (PoE); LAN: 2 × 10G SFP+ + 2 × GbE Combo + 8 × GbE RJ45 (PoE)

6. Contact Us

- Website: [InHand Networks](https://www.inhand-networks.com)
- Copyright: © InHand Networks. All rights reserved.