

Speed · Security · Stability · Simplicity



ER615 Edge Router

· 5G

· Wi-Fi 6

· Cloud-Managed

· Gigabit Ethernet

1. Product Overview

The InHand ER615 is a versatile edge access router designed to seamlessly connect stores and offices to the network via 5G/4G cellular or wired options, ensuring business continuity and efficient operations. With gigabit Ethernet ports and 3000 Mbps Wi-Fi 6 LAN capabilities, the ER615 delivers exceptional network performance and high availability for a wide range of digital terminals.

Features and Advantages:


- **SD-WAN:** Combined with InCloud Manager, quickly builds SD-WAN networking for branch interconnection with flexibility and cost efficiency
- **Flexible Connectivity:** Wired broadband, 4G/5G, and Wi-Fi with link backup and load balancing
- **Wi-Fi 6 AX3000:** 802.11 ax/ac/a/b/g/n, dual-band 3000 Mbps for superior wireless performance
- **Centralized Management:** InCloud Manager for zero-touch deployment, remote upgrades, and visualized monitoring
- **Cost-Effective:** All-in-one solution for retail, office, and branch networking

Core Technical Specifications


Technical Item	Specification
Cellular	5G/4G; NSA up to 2.6 Gbps DL / 458 Mbps UL; SA up to 2 Gbps DL / 766 Mbps UL; LTE up to 150/50 Mbps
Cloud Management	InCloud Manager
SD-WAN / VPN	SD-WAN (Spoke); IPsec, L2TP
Network & Security	IPv4/IPv6; VLAN, DHCP, static routing; NAT; 3L firewall; PPPoE; dual-SIM
Wi-Fi	Wi-Fi 6 (802.11ax), 2.4/5 GHz, 3000 Mbps; multi-SSID, VLAN, guest

Technical Item	Specification
Throughput / Users	1 Gbps; IPsec 100 Mbps; 200 users (128 Wi-Fi)
SIM	Dual Nano-SIM; eSIM optional
Ethernet	5 × GbE (WAN/LAN, dual WAN)
Antennas	4G: SMA ×2; 5G: SMA ×4; Wi-Fi: RP-SMA ×2; ≤5 dBi
Power	12 V / 2 A; peak ≤24 W
Dimensions / Environment	198 × 137 × 25 mm (7.8 × 5.39 × 0.98 in); 848 g (1.87 lb); wall / desktop; -10 °C ~ +50 °C (14 °F ~ +122 °F) op.; -40 °C ~ +85 °C (-40 °F ~ +185 °F) stg.; 5–95% RH; IP20
EMC	EMC Level 2


2. Product Dimensions

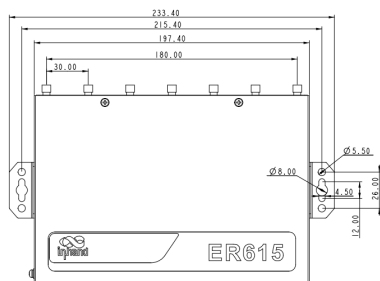

Front View



Interface Dimensions



Side View

Note:

1. All dimensions are in millimeters (mm), with inches (in) in parentheses.
2. Dimensions (L × W × H): 198 × 137 × 25 mm (7.8 × 5.39 × 0.98 in).
3. All dimensions are approximate, for reference only.
4. Dimensions shown shall not be used for production.

3. Hardware Specifications

Category/Parameter	Specification
Performance Metrics	
Throughput	1 Gbps
IPsec VPN Throughput	100 Mbps
Recommended Users	200 (Wi-Fi: 128)
RAM	512 MB
Flash	8 GB
Interfaces	
Cellular	5G SA: 2 Gbps DL / 766 Mbps UL; 5G NSA: 2.6 Gbps DL / 458 Mbps UL; 4G LTE: 150 Mbps DL / 50 Mbps UL
Ethernet	5 × 10/100/1000 Mbps, WAN/LAN switching, dual WAN
SIM Card	Dual Nano-SIM (eSIM optional)
Reset	Pinhole reset button
Antenna	4G: SMA × 2, Wi-Fi: RP-SMA × 2; 5G: SMA × 4, Wi-Fi: RP-SMA × 2
Wi-Fi	
Standard	802.11 a/b/g/n/ac/ax
Max Rate	3000 Mbps
TX Power	2.4 GHz: 18 dBm; 5 GHz: 17 dBm

Category/Parameter	Specification
Antenna Gain	≤ 5 dBi
Power	
Input	12 V / 2 A
Peak Power	≤ 24 W
LEDs	
LED	Power, Network, Signal, Wi-Fi
Mechanical	
Dimensions	198 × 137 × 25 mm (7.8 × 5.39 × 0.98 in)
Weight	848 g (1.87 lb)
Installation	Wall mounting, desktop
Protection	IP20
Environment	
Operating Temperature	-10 °C ~ +50 °C (14 °F ~ +122 °F)
Storage Temperature	-40 °C ~ +85 °C (-40 °F ~ +185 °F)
Humidity	5–95 % RH (non-condensing)
EMC	
EMC	EMC level 2

4. Software Specifications

Category/Parameter	Specification
Cloud Management	
Platform	InCloud Manager
Features	Centralized configuration, zero-touch deployment, remote upgrades, SD-WAN
Dashboard	WAN/access/application visibility, traffic statistics, cellular signal, interface status, client analysis
Network Features	
Access	5G/4G, wired, Wi-Fi
Dialing	PPPoE, cellular auto redial, dual-SIM switching, APN configuration
IP Protocols	IPv4, IPv6
Protocols	VLAN, DHCP (Server/Client), DHCP Snooping, DNS, DDNS, IP Passthrough, STP, ARP, ICMP
VPN	IPsec VPN, L2TP VPN
SD-WAN	SD-WAN (Spoke)
Routing	Static routing
Wi-Fi	
Features	Multi-SSID, SSID VLAN, SSID hidden, guest mode
Encryption	WPA, WPA2, WPA-PSK, WPA2-PSK, WPA3
Security	

Category/Parameter	Specification
Firewall	3L inbound/outbound rules, port forwarding, SNAT, DNAT
Access Control	Black/white list, domain filtering
Reliability	
Traffic Shaping	Traffic shaping by link/IP/protocol
Upgrades	Scheduled upgrades
Logs	Runtime logs, diagnostic logs
Events	User logins, connection disconnects, device reboots
Alarms	Local email; platform SMS and email
Diagnostic	
Tools	ICMP, packet capture, traceroute

5. Ordering Information

Model Code

Model code: ER615-\u003cWMNN\u003e-\u003cWLAN/NA\u003e

\u003cWMNN\u003e: Cellular Type & Module

\u003cWLAN/NA\u003e: WLAN = Wi-Fi 6; NA = no Wi-Fi

Product Models

Model	Region	Cellular	Specification
ER615-CNNR-<WLAN/NA>	China	5G	5G NR SA n1/n8/n28/n41/n78; NSA n41/n78; LTE-FDD B1/B3/B5/B8; LTE-TDD B34/B38/B39/B40/B41
ER615-CNC4-<WLAN/NA>	China	4G	LTE-FDD B1/B3/B5/B8; L TE-TDD B34/B38/B39/B40/B41; WCDMA B1/B5/B8
ER615-EUC4-<WLAN/NA>	EU & APAC	4G	LTE-FDD B1/B3/B5/B7/B8/B20/B28; LTE-TDD B38/B40/B41; WCDMA B1/B5/B8
ER615-EN00-<WLAN/NA>	—	No Module	No cellular module

6. Contact Us

- Website: [InHand Networks](https://www.inhandnetworks.com)
- Copyright: © InHand Networks. All rights reserved.