

Powerful Connectivity, Convenient Management



ES620 Enterprise Switch

· 28×GbE

· High Performance

· Cloud-Managed

· PoE

1. Product Overview

The ES620 switch features 24 gigabit ports and 4 combo ports, supporting PoE on all 24 ports. It offers exceptional data handling capabilities, ensuring stable performance in large-scale data transfer and complex network environments, making it a reliable and convenient solution for enterprise networking. Its extensive access capacity and powerful PoE capability make it ideal for hotels, campuses, and dormitories. Additionally, the device is managed through the InCloud Manager platform, providing a comprehensive visual interface for easy network monitoring, simplified configuration, and enhanced management, helping businesses reduce costs and improve efficiency.

Features and Advantages:


- **28 Gigabit Ethernet Ports:** 24 × GbE RJ45 + 4 × Combo ports for robust network connectivity
- **Smart PoE:** 24 ports support simultaneous PoE, 30 W per port, 450 W total output
- **Simple Configuration:** Graphical user interface, intuitive configuration without professional IT skills
- **Centralized Management:** InCloud Manager for unified management of routers, switches, and wireless products
- **Multidimensional Visual Monitoring:** Online history, network status, interface status, device alerts, and events

Core Technical Specifications

Technical Item	Specification
Cloud Management	InCloud Manager: unified device access, zero-touch remote deployment
Dashboard	Device statistics, connectivity status
Maintenance	Scheduled upgrades

Technical Item	Specification
Performance	Switching capacity 56 Gbps; packet forwarding 41 Mpps; RAM 128 MB; Flash 32 MB
Interfaces & PoE	28 × GbE RJ45; 24 × 802.3 af/at PoE; 1 × Console; 1 × Reset
Cooling	4 × built-in fans
Power	100–240 V AC, 50–60 Hz; 400 W total consumption (370 W PoE)
Mechanical	440 × 315 × 44 mm (17.32 × 12.4 × 1.73 in); metal; 1U rack; IP20
Environment	Operating 0 °C ~ +45 °C (32 °F ~ +113 °F); storage -40 °C ~ +70 °C (-40 °F ~ +158 °F); humidity 95 % RH @ 40 °C
Compliance	In planning: CE, FCC, IC; EMC Level 2

2. Product Dimensions

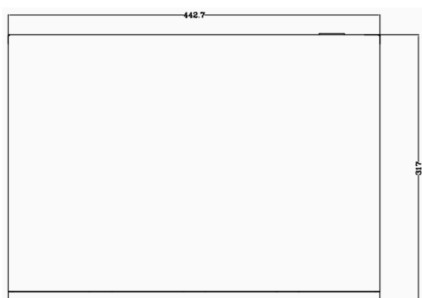

Front View



Interface



Side View

Note:

1. All dimensions are in millimeters (mm), with inches (in) in parentheses.
2. Dimensions (L × W × H): 440 × 315 × 44 mm (17.32 × 12.4 × 1.73 in).
3. All dimensions are approximate, for reference only.
4. Dimensions shown shall not be used for production.

3. Hardware Specifications

Category/Parameter	Specification
Performance Metrics	
Model	ES620
Switching Capacity	56 Gbps
Packet Forwarding Rate	41 Mpps
RAM	128 MB
Flash	32 MB
MAC Address Table	8K
Interfaces	
Ethernet	28 × GbE RJ45
PoE	24 × 802.3 af/at
Console	1 × Console
Reset	1 × Reset button
LEDs	
LED	1 × Power, 1 × System, 24 × PoE status, 28 × Link status
Cooling	
Fan	4 × Built-in fans
Power	
Input	100–240 V AC, 50–60 Hz
Power Consumption	400 W total (370 W PoE)

Category/Parameter	Specification
Mechanical	
Dimensions	440 × 315 × 44 mm (17.32 × 12.4 × 1.73 in)
Material	Metal
Installation	1U Rack
Protection	IP20
Environment	
Operating Temperature	0 °C ~ +45 °C (32 °F ~ +113 °F)
Storage Temperature	-40 °C ~ +70 °C (-40 °F ~ +158 °F)
Humidity	95 % RH @ 40 °C
Certification	
Certification	In planning: CE, FCC, IC
EMC	EMC Level 2

4. Software Specifications

Category/Parameter	Specification
Cloud Management	
Platform	InCloud Manager
Features	Unified device access, zero-touch remote deployment, batch upgrades and configuration deployment, cloud-connected remote maintenance, two-factor authentication

Category/Parameter	Specification
Dashboard	Device statistics, connectivity status, connection quality analysis (latency, packet loss, throughput); traffic statistics, interface status, client statistics analysis
Network Features	
IP Protocol	IPv4
Protocols	VLAN, STP, RSTP, port management, traffic control, 802.1X*, PoE management, link aggregation*, loop detection*, broadcast storm*
Maintenance	
Upgrades	Scheduled upgrades
Logs	Operation logs and diagnostic logs
Events	User login, connection/disconnection, device restart, and other operational events
Alerts	SMS and email alerts
Diagnostic	ICMP, Tracert, Tcpdump

Features marked with an asterisk () are under development.**

5. Ordering Information

Model Code

Model code: ES620-WMNN WMNN: Hardware Specifications

Product Models

Model	Region	Specification
ES620-24P-4F	Global	Layer 2 cloud-managed switch; 56 Gbps switching capacity, 41 Mpps packet forwarding rate; 24 × GbE RJ45 (802.3 af/at PoE); 4 × Combo ports

6. Contact Us

- Website: [InHand Networks](https://www.inhand-networks.com)
- Copyright: © InHand Networks. All rights reserved.