

Share happiness with your friends



FV680 AI Vending Machine

· 24/7 Operation

· AI Recognition

· Grab & Go

· Remote Management

1. Product Overview

FV680 AI vending machine for Grab & Go smart retail with cloud remote management.

Key features:


- **24/7 Operation:** Fully automated; cuts labor cost
- **AI Recognition:** Proprietary algo; boosts conversion
- **Grab & Go:** Card swipe open; auto-checkout on close
- **Remote Management:** Cloud monitor, price, promotions
- **HealthLock:** Auto door-lock; keeps items fresh

Core Technical Specifications

Specification Item	Value
AI Recognition	Proprietary algorithm; boosts sales conversion
Privacy	Face blurring for compliance and privacy
Grab & Go	Card swipe to open; auto-checkout on door close
Remote Management	Cloud monitoring, pricing, and promotions
Cellular Connectivity	LTE module (FQ09 variant, model dependent)
Analytics	Sales trends, customer behavior
Dimensions	775 × 788 × 1982 mm (30.51 × 31.02 × 78.03 in)
Capacity	680 L (24 cu.ft); 6 open shelves
Power Supply	115 V AC, 60 Hz, 10 A; NEMA 5-15P
Compressor	1/3 HP
Door Glass	Double-pane low-e tempered

Specification Item	Value
Ship Weight	164 kg (362 lbs)

2. Product Dimensions

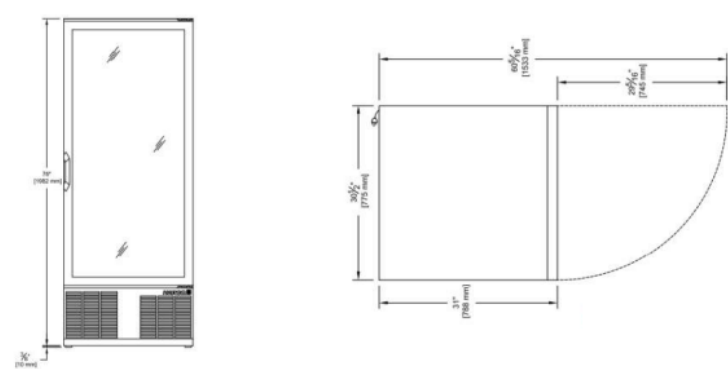

Front Elevation and Plan View (door swing)

- Note:
1. All dimensions are in millimeters (mm); imperial units shown on drawing for reference.
 2. Body dimensions (W × D × H): 775 × 788 × 1982 mm (30.51 × 31.02 × 78.03 in).
 3. Door width: 745 mm; depth with door open 90°: 1533 mm.
 4. Base clearance: 10 mm (3/8").
 5. All dimensions are approximate, **for reference only**.
 6. Dimensions shown **shall not be used for production**.
 7. Dimensions are subject to part and manufacturing tolerances.
 8. Specifications may change without prior notice.

3. Hardware Specifications

Category/Parameter	Specification
Cabinet & Insulation	
Insulation	Foamed-in-place polyurethane
Door Glass	Double-pane low-e tempered glass, argon filled



Category/Parameter	Specification
Shelving	6 shelves; open shelves with flexible placement
Capacity	680 L (24 cu.ft); ~2× traditional machine volume
Refrigeration	
Compressor	1/3 HP
Ventilation	Directed airflow ventilation
Smart Interface	
POS	Integrated POS with screen (Grab & Go)
Door Access	Swipe card to open door; auto-checkout upon door closing
Payment Method	POS (per model configuration)
Connectivity	
Cellular	LTE module (FQ09 variant, model dependent)
Electrical	
Voltage	115 V AC, 60 Hz
Current	10 A
NEMA Configuration	5-15P
Mechanical	
Dimensions (W × D × H)	775 × 788 × 1982 mm (30.51 × 31.02 × 78.03 in)
Door Width	745 mm
Depth (door open 90°)	1533 mm
Ship Weight	164 kg (362 lbs)

Category/Parameter	Specification
Ship Cube	1.39 m ³ (49 cu.ft)
Base Clearance	10 mm

4. Software Specifications

Category/Parameter	Specification
AI Vending Machine Management System	
AI Recognition	Proprietary recognition algorithm to boost sales conversion
Privacy	Face blurring for compliance and privacy protection
Checkout	Grab & Go: swipe card to open; auto-checkout on door close
Operations & Monitoring	
Remote Management	Real-time cloud monitoring and control
Remote Configuration	Adjust settings, pricing, and promotions remotely
Machine Monitoring	Real-time monitoring for continuous operation
Workflow	Intuitive interface; simplified operational workflow
Analytics	
Reporting	Sales trends and customer behavior reports
Decision Support	Data-driven decisions for smarter retail operations

5. Ordering Information

Model Rule

Model code: FV680-PS02-<WMNN>

<WMNN>: Cellular Type & Module (remote connectivity)

Configurable options per ordering guide:

- <BBB>: Capacity
- <XXX>: Payment Method
- <C><E>: Other options

Model List

Model	Region	<WMNN>	Capacity	Payment Method
FV680-PS02-FQ09	Global	FQ09	680 L (24 cu.ft)	POS

6. Contact Us

- Website: [InHand Networks](https://www.inhandnetworks.com)
- Copyright: © InHand Networks. All rights reserved.