

Instant 5G Connectivity Starts Here



FWA02 5G Router

· 5G

· Wi-Fi 6

· Cloud-Managed

· External Antennas

1. Product Overview

The FWA02 offers global 5G connectivity, ensuring convenient, reliable, and secure internet access in urban, suburban, remote, or rural areas. It delivers a faster, lower-latency, and higher-performance network experience with plug-and-play simplicity.

Product Positioning: Instant 5G Connectivity Starts Here

Features and Advantages:


- **Plug and Play High-Speed 5G:** Up to 4.76 Gbps DL / 1.25 Gbps UL, LTE CAT 19 fallback
- **Always-on Connectivity:** 5G/wired backup, cellular failover, dual-SIM switching, optional eSIM
- **Secure Network Connection:** Firewall policies, access control, built-in VPN, data encryption, enhanced Wi-Fi security
- **Cloud-Managed:** InCloud Manager for zero-touch deployment, real-time monitoring, centralized management
- **Wi-Fi 6:** Dual-band 2.4 / 5.8 GHz, 3600 Mbps, 802.11 ax/ac/b/g/n

Core Technical Specifications

Technical Item	Specification
Cellular	5G SA/NSA + LTE Cat19; up to 4.76 Gbps DL / 1.25 Gbps UL (5G)
Cloud Management	InCloud Manager
VPN	IPsec, L2TP
Network	IPv4/IPv6
Wi-Fi	Wi-Fi 6 (802.11ax), 2.4/5.8 GHz, 3600 Mbps

Technical Item	Specification
Throughput / Users	Stateful firewall 2 Gbps; up to 220 users (128 Wi-Fi)
SIM	1 × eSIM + 2 × Nano-SIM (hot-swap)
Ethernet	2 × 2.5 GbE (WAN/LAN, dual-LAN)
Antennas	6 × external Sub-6 + 4 × internal Wi-Fi (NATM: 4 × external Sub-6)
Power	12 V / 2 A; ≤15 W
Dimensions	236 × 172.5 × 58.5 mm (9.29 × 6.79 × 2.3 in)
Certification	FCC, IC, PTCRB, Verizon, T-Mobile, CE

2. Product Dimensions

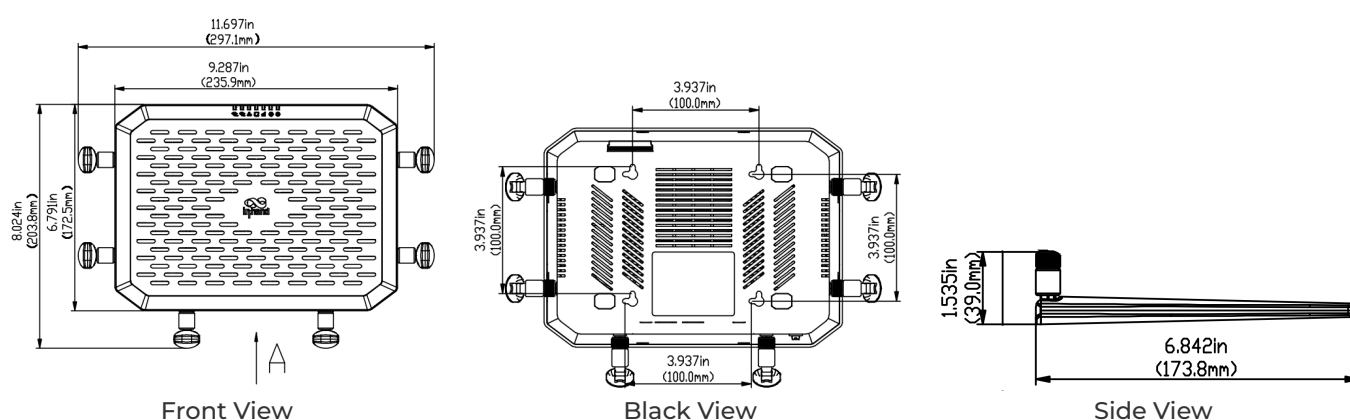

Note:

1. All dimensions are in millimeters (mm), with inches (in) in parentheses.
2. Dimensions (L × W × H): 236 × 172.5 × 58.5 mm (9.29 × 6.79 × 2.3 in).
3. All dimensions are approximate, for reference only.
4. Dimensions shown shall not be used for production.

3. Hardware Specifications

Category/Parameter	Specification
Performance Metrics	
Stateful Firewall Throughput	2 Gbps
Recommended Users	220 (128 Wi-Fi devices)
Interfaces	
Ethernet	2 × 2.5 GbE RJ45, WAN/LAN switchable, dual-LAN
USB	1 × Type-C 2.0, HOST and SLAVE modes
SIM	1 × eSIM; 2 × Nano-SIM, hot plug
Reset	Reset button
Power Switch	1 × button
LED	System, Cellular, Signal, WAN, LAN, Wi-Fi
Antenna	6 × external Sub-6 antenna; 4 × built-in Wi-Fi antenna (NATM: 4 × external Sub-6)
Cellular	
Data Rate	5G SA/NSA: 4.76 Gbps DL / 1.25 Gbps UL; 4G CAT19: 1.6 Gbps DL / 200 Mbps UL
Antenna Freq.	617–5925 MHz
Antenna Gain	617–894 MHz: 2 dBi; 1700–5000 MHz: 4.11 dBi
Wi-Fi	

Category/Parameter	Specification
Frequency	2.4 GHz, 5.8 GHz
Max Bandwidth	3600 Mbps
Protocol	802.11 ax/ac/b/g/n, Wi-Fi 6
Antenna Freq.	2400–2500 MHz; 5000–5800 MHz
Antenna Gain	2400–2500 MHz: 4.17 dBi; 5000–5800 MHz: 4.56 dBi
Power	
Input	Circular interface, 12 V / 2 A
Power Consumption	≤ 15 W
Mechanical	
Dimensions	236 × 172.5 × 58.5 mm (9.29 × 6.79 × 2.3 in)
Weight	2.2 lbs
Installation	Wall mounting, desktop mounting
Environment	
Operating Temperature	-10 °C ~ +50 °C (14 °F ~ +122 °F)
Storage Temperature	-40 °C ~ +85 °C (-40 °F ~ +185 °F)
Humidity	5–95 % RH (non-condensing)
Protection	IP20
Physical	
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
Free Fall	IEC 60068-2-32

Category/Parameter	Specification
Certification	
Certification	FCC, IC, PTCRB, Verizon, T-Mobile, CE
Warranty	3 years

4. Software Specifications

Category/Parameter	Specification
Cloud Management	
Platform	InCloud Manager
Features	Centralized management, dashboard, batch upgrade, uplink management
Network Access	
Access	5G/4G cellular, Ethernet
Dialing	PPPoE, cellular auto redial, dual-SIM switching, APN configuration
Smart Link	
Link Backup	Packet-by-packet load balancing
Link Monitoring	Real-time delay, jitter, packet loss, throughput monitoring
Link Priority	Link priority adjustment
Security	
VPN	IPsec VPN, L2TP VPN

Category/Parameter	Specification
Firewall	Access control, port mapping, port forwarding, MAC/IP/port/protocol filtering
Monitoring	
Dashboard	Device info, interface status, traffic statistics
Cellular Signal	Real-time RSSI, RSRP, RSRQ, SINR, etc.
Logs	System logs, diagnostic logs, device events, email alerts
Network Functions	
IP Protocol	IPv4 / IPv6
Applications	VLAN, DHCP Server/Client, DNS, DDNS, Fixed Address, IP Passthrough
Interface	Duplex mode, link negotiation, interface enable
Wi-Fi	
Mode	802.11 ax/ac/b/g/n, Wi-Fi 6, AP mode
Policy	
Policy	Policy routing, traffic shaping
Self Recovery	
Watchdog	Software and hardware watchdog, self-healing
Remote Maintenance	
Access	Web UI, CLI remote access and control
Cloud	Remote maintenance of PCs, monitoring equipment, servers, etc.
Diagnostics	Ping, Traceroute, packet capture, diagnostic logs

Category/Parameter	Specification
Config	Configuration import and export

5. Ordering Information

Model Code

Model code: FWA02-\u003cWMNN\u003e\u003cWMNN\u003e: Type & Module

Product Models

Model	Region	Specification
FWA02-NAVA	North America (Verizon)	5G Sub-6: n2/5/7/12/14/25/30/41/48/66/71/77/78; LTE-FDD B2/4/5/7/12/13/14/17/25/26/29/30/66/71; LTE-TDD B41/46/48
FWA02-NATM	North America (T-Mobile)	5G Sub-6: n25/41/66/71; LTE-FDD B2/4/5/12/66/71; LTE-TDD B41; LAA B46
FWA02-EUNR	Europe/Australia/Asia	5G Sub-6: n1/3/5/7/8/20/28/38/40/41/71/77/78/79; LTE-FDD B1/3/5/7/8/20/28/32/71; LTE-TDD B38/40/41/42/43

6. Contact Us

- Website: [InHand Networks](#)
- Copyright: © InHand Networks. All rights reserved.