

Simple, highly reliable network communication
system



ISE2003D Unmanaged Industrial Ethernet Switch

· Plug-and-play

· DIN-rail

· Fanless

· IP30

1. Product Overview

The ISE2003D is designed for power, transportation, industrial control, and demanding industrial environments.

Product Features:


- **Robust Design:** Fully enclosed seamless metal casing, fanless design, IP30 protection rating.
- **Wide Adaptability:** Wide-temperature (-40 ~ +75°C) and wide-voltage (9.6-60VDC & 18-30VAC) design.
- **International Standard:** Complies with FCC, CE, ROHS, and UL standards with excellent EMC.
- **Smart Switching:** QoS and Broadcast Storm Protection (BSP), configurable via DIP switch.
- **Easy Deployment:** Plug-and-play, DIN rail mountable, compact size for quick deployment.

Key Technical Specifications

Parameter	Specification
Type	Layer 2 Unmanaged Industrial Ethernet Switch
Ports	1 x Fixed Fiber (SC) + 2 x 10/100BaseT
Switching Performance	1.6 Gbps backplane, Store-and-Forward, 1K MAC
Dimensions / Weight	24 × 100 × 61.8 mm (0.94 × 3.94 × 2.43 in) / 0.23 kg (0.51 lb)
Power	9.6-60 VDC & 18-30 VAC, 5 W
Environment	-40 °C ~ +75 °C (-40 °F ~ +167 °F) operating, IP30
EMC	IEC 61000-4-2/3/4/5/6/18 Class 3, IEC 61000-4-8 Class 5

Parameter	Specification
Certifications	CE, FCC, UL (ISE2003D-P-S203-2T-SC-24)

2. Product Dimensions

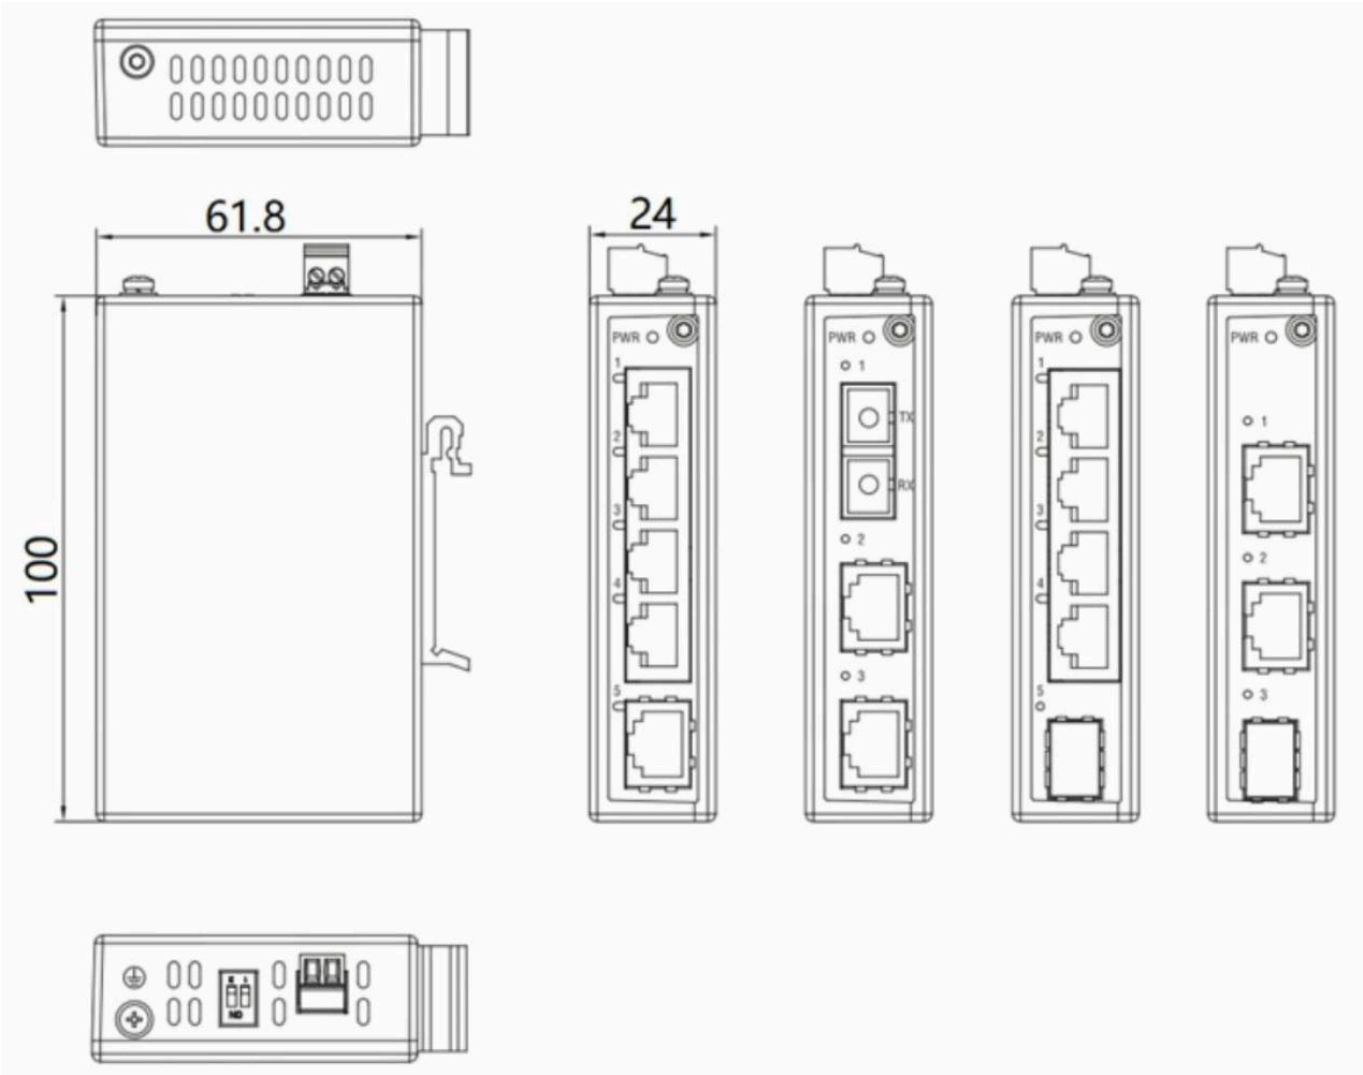

ISE2003D

- Note:
- 1. All dimensions are in millimeters (mm), with inches (in) in parentheses.
 - 2. All dimensions are approximate and **for reference only**.
 - 3. The dimensions shown in the figure **shall not be used for production or processing**.
 - 4. Dimensions must comply with part and manufacturing tolerance requirements.
 - 5. Dimensions are subject to change without notice.

3. Hardware Specifications

Category/Parameter	Specification
Physical Performance	
Enclosure	Fully enclosed seamless metal enclosure
Dimensions (W × D × H)	24 mm × 100 mm × 61.8 mm
Weight	0.23 kg (0.51 lb)
Mounting Method	DIN-rail mounting
Cooling Method	Fanless cooling
Protection Grade	IP30
Storage Temperature	-40 °C ~ +85 °C (-40 °F ~ +185 °F)
Operating Temperature	-40 °C ~ +75 °C (-40 °F ~ +167 °F)
Humidity	5 ~ 95% (non-condensing)
Hardware Performance	
Backplane Bandwidth	1.6 Gbps
Processing Type	Store-and-Forward
MAC Table Size	1K
Packet Buffer Size	448 Kbit
Switching Delay	<10 μs

Category/Parameter	Specification
DIP Switch	Quality of Service (QoS), Broadcast Storm Protection (BSP)
Power Parameters	
Operating Voltage	9.6–60 VDC & 18–30 VAC
Power Consumption	5 W
Overcurrent Protection	Supported
Reverse Polarity Protection	Supported
Electromagnetic Characteristics	
EMS	IEC(EN)61000-4-2, Class 3; IEC(EN)61000-4-3, Class 3 IEC(EN)61000-4-4, Class 3; IEC(EN)61000-4-5, Class 3 IEC(EN)61000-4-6, Class 3; IEC(EN)61000-4-8, Class 5 IEC(EN)61000-4-18, Class 3
Certifications	
Certifications	CE, FCC, UL (ISE2003D-P-S203-2T-SC-24)
Quality Assurance	
Warranty Period	5 years
MTBF	35 years

4. Ordering Guide

Model	Description
ISE2003D-P-S203-2T-SC-24	3-port Layer 2 unmanaged Industrial Ethernet. 1 × Fixed Fiber Port (MultiMode, 5KM, SC), and 2 × 10/100 BaseT Ports. IP30 Protection Class, Operating Temperature from -40 °C to +75 °C (-40 °F to +167 °F). Single power input: 12/24/48 VDC (9.6~60VDC) or 24 VAC (18~30 VAC) (Only connect to class 2 power supply).
ISE2003D-P-M3-2T-SC-24	3-port Layer 2 unmanaged Industrial Ethernet. 1 × Fixed Fiber Port (SingleMode, 20KM, SC), and 2 × 10/100 BaseT Ports. IP30 Protection Class, Operating Temperature from -40 °C to +75 °C (-40 °F to +167 °F). Single power input: 12/24/48 VDC (9.6~60VDC) or 24 VAC (18~30 VAC) (Only connect to class 2 power supply).

5. Contact Us

- Website: [InHand Networks](https://www.inhand-networks.com)
- Copyright: ©InHand Networks All rights reserved