

Simple, highly reliable network communication
system



ISE2016D Unmanaged Industrial Ethernet Switch

· Plug-and-play

· DIN-rail

· Fanless

· IP30

1. Product Overview

The ISE2016D is designed for power, transportation, industrial control, and demanding industrial environments.

Product Features:


- **Robust Design:** Fully enclosed seamless metal casing, fanless design, IP30 protection rating.
- **Wide Adaptability:** Wide-temperature (-40 ~ +75°C) and wide-voltage (9.6-60VDC & 18-30VAC) design.
- **International Standard:** Complies with FCC, CE, ROHS, and UL standards with excellent EMC.
- **Smart Switching:** QoS, BSP, Power Alarm, Port Alarm and Alarm Buzzer, configurable via DIP switch.
- **Easy Deployment:** Plug-and-play, DIN rail mountable, compact size for quick deployment.

Key Technical Specifications

Parameter	Specification
Type	Unmanaged Industrial Ethernet Switch, Layer 2, Store-and-Forward
Ports	16 x 10/100 BaseT
Switching Performance	8.8 Gbps backplane bandwidth, 8K MAC, 1.5 Mbit buffer, <10 us latency
Dimensions / Weight	52 × 140 × 110 mm (2.05 × 5.51 × 4.33 in) / 1 kg (2.2 lb)
Power	9.6-60 VDC & 18-30 VAC, redundant dual inputs, 10 W
Environment	-40 °C ~ +75 °C (-40 °F ~ +167 °F) operating, IP30, fanless

Parameter	Specification
EMC	IEC 61000-4-2/3/4/5/6/8/18, Class 3-5
Certifications	CE, FCC, UL

2. Product Dimensions

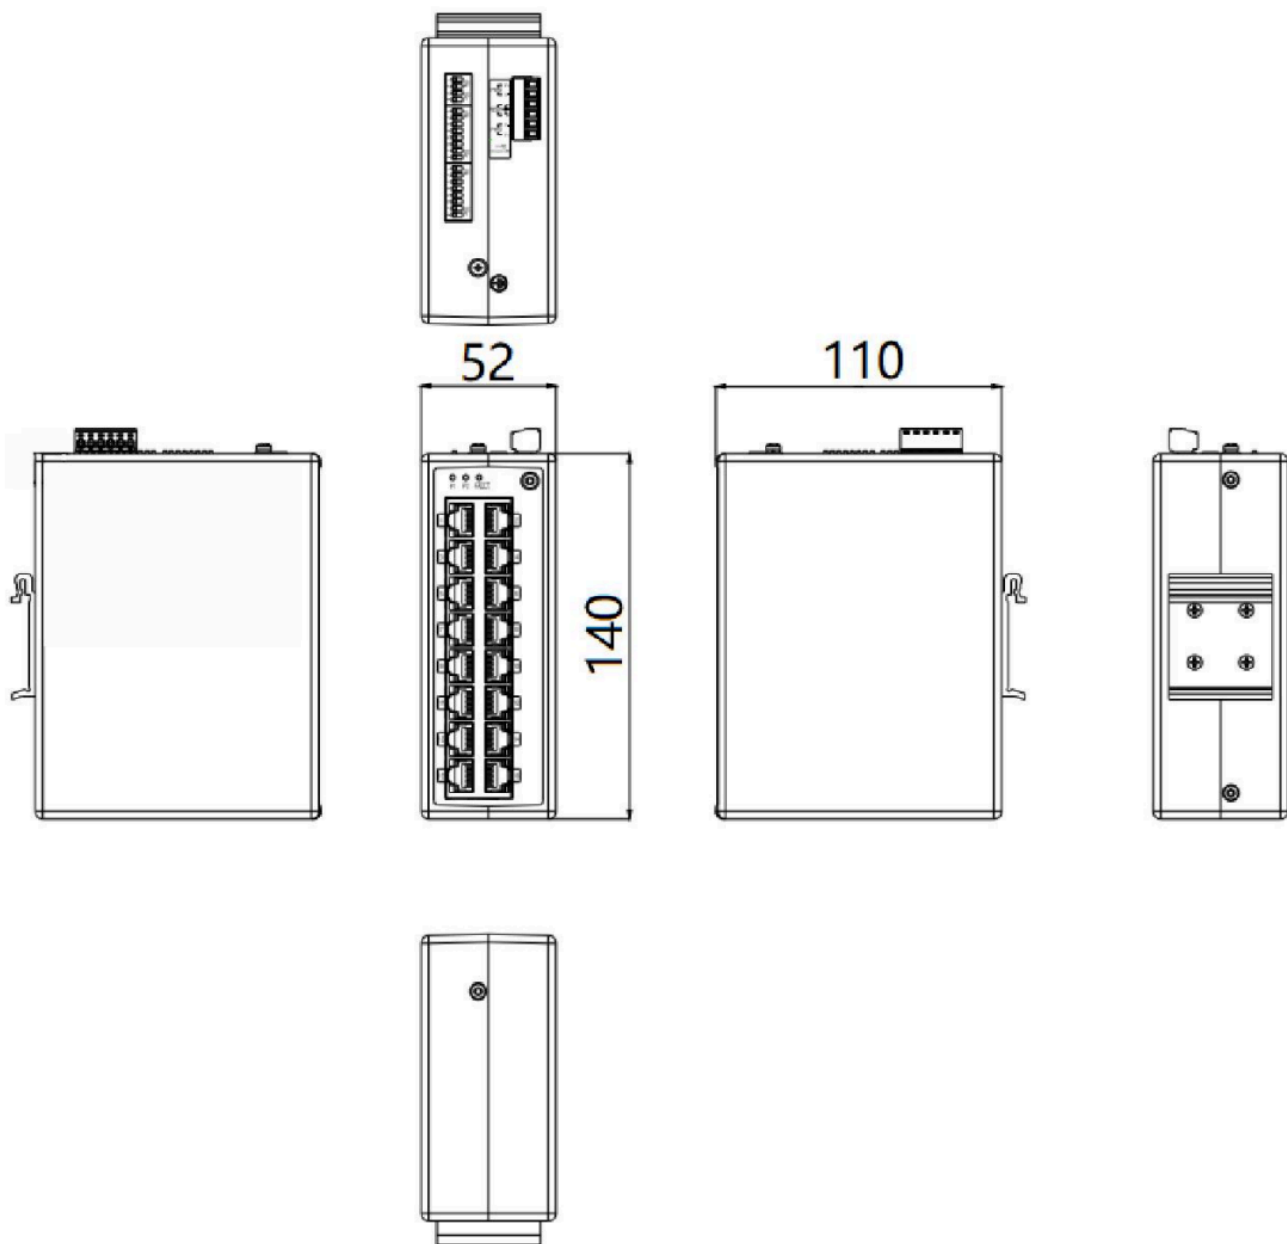

ISE2016D

Note:

1. All dimensions are in millimeters (mm), with inches (in) in parentheses.

2. All dimensions are approximate and **for reference only**.
3. The dimensions shown in the figure **shall not be used for production or processing**.
4. Dimensions must comply with part and manufacturing tolerance requirements.
5. Dimensions are subject to change without notice.

3. Hardware Specifications

Category/Parameter	Specification
Physical Performance	
Enclosure	Fully enclosed seamless metal enclosure
Dimensions (W × D × H)	52 mm × 140 mm × 110 mm
Weight	1 kg (2.2 lb)
Mounting Method	DIN-rail mounting
Cooling Method	Fanless cooling
Ingress Protection	IP30
Storage Temperature	-40 °C ~ +85 °C (-40 °F ~ +185 °F)
Operating Temperature	-40 °C ~ +75 °C (-40 °F ~ +167 °F)
Humidity	5 ~ 95% (non-condensing)
Hardware Performance	
Backplane Bandwidth	8.8 Gbps

Category/Parameter	Specification
Processing Type	Store-and-Forward
MAC Table Size	8K
Packet Buffer Size	1.5 Mbits
Switching Delay	<10 μ s
DIP Switch	Quality of Service (QoS), Broadcast Storm Protection (BSP), Power Alarm, Port Alarm, Alarm Buzzer
Power Parameters	
Operating Voltage	9.6–60 VDC & 18–30 VAC, Redundant dual inputs
Power Consumption	10 W
Overcurrent Protection	Supported
Reverse Polarity Protection	Supported
Electromagnetic Characteristics	
EMS	IEC(EN)61000-4-2, Class 3; IEC(EN)61000-4-3, Class 3 IEC(EN)61000-4-4, Class 3; IEC(EN)61000-4-5, Class 3 IEC(EN)61000-4-6, Class 3; IEC(EN)61000-4-8, Class 5 IEC(EN)61000-4-18, Class 3
Certifications	
Certifications	CE, FCC, UL
Quality Assurance	
Warranty Period	5 years
MTBF	35 years

DIP Switch Settings

Category/Parameter	Specification
Quality of Service (QoS) – On	Enables the QoS function, processes packet priorities in 2 WRR queues. Priority 7,6,5,4 → Queue 1 (WRR Weight 16); Priority 3,2,1,0 → Queue 0 (WRR Weight 1)
Quality of Service (QoS) – Off	Disables the QoS function
Broadcast Storm Protection (BSP) – On	Enables broadcast storm protection for all ports (allows max 200 broadcast packets per second)
Broadcast Storm Protection (BSP) – Off	Disables the broadcast storm protection function
Power Alarm – On	Enables power alarm output when power supply fails
Power Alarm – Off	Disables the power alarm function
Port Alarm – On	Enables port alarm output when port link fails
Port Alarm – Off	Disables the port alarm function
Alarm Buzzer – On	Enables audible alarm buzzer for alarm events
Alarm Buzzer – Off	Disables the alarm buzzer

4. Ordering Guide

Model	Description
ISE2016D-P-16T-24	16-port Layer 2 unmanaged Industrial Ethernet Switch. 16 × 10/100 BaseT Ports. DIP-enabled Sound & Light Alarm Output & 1 Alarm Relay port (1A@24VDC). IP30 Protection Class, Operating Temperature from -40 °C to +75 °C (-40 °F to +167 °F). Dual 12/24/48 VDC (9.6~60VDC) & 24VAC (18~30 VAC) Power Input (Only connect to class 2 power supply).

5. Contact Us

- Website: InHand Networks
- Copyright: ©InHand Networks All rights reserved