

Simple, Highly Reliable Industrial Network Communication



ISE3018D Unmanaged Industrial Ethernet Switch

· 18 Ports

· Gigabit Combo

· IP30

· Wide Temperature

1. Product Overview

ISE3018D is an 18-port unmanaged industrial Ethernet switch built for power, transportation, and industrial control environments.

Product Features:


- **Industrial Reliability:** Robust metal casing, fanless design, IP30 protection, wide-temperature operation.
- **Excellent EMC:** Outstanding electromagnetic compatibility and radiation performance.
- **Redundant Power:** Dual input power design (9.6–60 VDC & 18–30 VAC) for high availability.
- **QoS & BSP:** DIP switch-enabled Quality of Service and Broadcast Storm Protection.
- **Easy Deployment:** Plug-and-play, DIN rail mountable, compact size for quick deployment.

Key Technical Specifications

Parameter	Specification
Type	Unmanaged Industrial Ethernet Switch, Layer 2, Store-and-Forward
Ports	16 x 10/100 BaseT + 2 x 100/1000Base(X/T) Gigabit Combo (SFP not included)
Switching Performance	8.8 Gbps backplane bandwidth, 8K MAC, 4 Mbit buffer, <10 us latency
Dimensions / Weight	72 × 140 × 110 mm (2.83 × 5.51 × 4.33 in) / 1.2 kg (2.65 lb)
Power	9.6-60 VDC & 18-30 VAC, redundant dual inputs, 10 W
Environment	-40 °C ~ +75 °C (-40 °F ~ +167 °F) operating, IP30, fanless

Parameter	Specification
EMC	IEC 61000-4-2/3/4/5/6/8/18, Class 3-5
Certifications	CE, FCC, UL

2. Product Dimensions

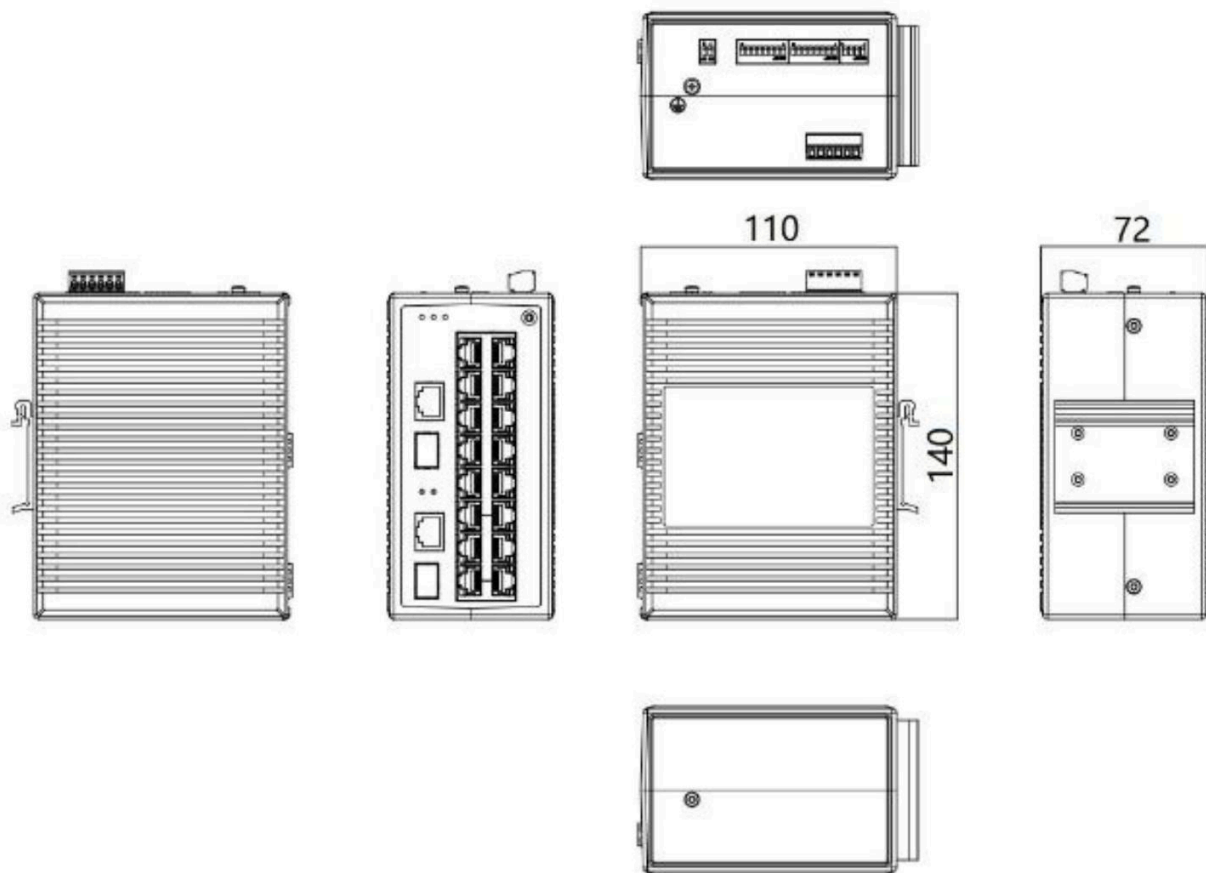

Dimension Diagram

Note:

1. All dimensions are in millimeters (mm), with inches (in) in parentheses.
2. All dimensions are approximate and **for reference only**.
3. The dimensions shown in the figure **shall not be used for production or processing**.
4. Dimensions must comply with part and manufacturing tolerance requirements.
5. Dimensions are subject to change without notice.

3. Hardware Specifications

Category/Parameter	Specification
Physical Performance	
Enclosure	Fully enclosed seamless metal enclosure
Dimensions (W × D × H)	72 mm × 140 mm × 110 mm
Weight	1.2 kg (2.65 lb)
Mounting Method	DIN-rail mounting
Cooling Method	Fanless cooling
Protection Grade	IP30
Storage Temperature	-40 °C ~ +85 °C (-40 °F ~ +185 °F)
Operating Temperature	-40 °C ~ +75 °C (-40 °F ~ +167 °F)
Humidity	5 ~ 95% (non-condensing)
Hardware Performance	
Backplane Bandwidth	8.8 Gbps
MAC Table Size	8K
Packet Buffer Size	4 Mbits
Processing Type	Store-and-Forward
Switching Delay	<10 μs
Power Parameters	



Category/Parameter	Specification
Operating Voltage	9.6–60 VDC & 18–30 VAC, Redundant dual input
Power Consumption	10 W
Protection	Overload Current Protection, Reverse Polarity Protection
Electromagnetic Characteristics	
EMS	IEC(EN)61000-4-2, Class 3; IEC(EN)61000-4-3, Class 3 IEC(EN)61000-4-4, Class 3; IEC(EN)61000-4-5, Class 3 IEC(EN)61000-4-6, Class 3; IEC(EN)61000-4-8, Class 5 IEC(EN)61000-4-18, Class 3
Certifications	
Certifications	CE, FCC, UL
Warranty	
Warranty Period	5 years
MTBF	35 years

4. Ordering Guide

Model	Description
ISE3018D-P-2GC-16T-24	18-port Layer 2 unmanaged Industrial Switch. 16 × 10/100BaseT Ports + 2 × 100/1000Base(X/T) Combo Ports (SFP not included). DIP-enabled Sound & Light Alarm Output & 1 Alarm Relay port (1A@24VDC). IP30 Protection Class, Operating Temperature from -40 °C to +75 °C (-40 °F to +167 °F). Dual 12/24/48 VDC (9.6–60 VDC) & 24VAC (18–30 VAC) Power Input (Only connect to class 2 power supply).

5. Contact Us

- Website: [InHand Networks](https://www.inhandnetworks.com)
- Copyright: ©InHand Networks All rights reserved