

# Simple, highly reliable network communication system



## ISE5010D Industrial Switch

· Plug-and-play

· DIN-rail

· Fanless

· IP40

# 1. Product Overview

ISE5010D is designed specifically for power, transportation, industrial control, and other demanding industrial environments.


## Features:

- **Robust design:** Robust metal casing, fanless design, and industrial-grade power supply design.
- **Wide adaptability:** Wide-temperature (-40 ~ +75°C) and wide-voltage design (18-60VDC).
- **International standard:** Complies with FCC, CE, ROHS standards and Excellent EMC.
- **Flexible uplink:** 2 x SFP fiber ports plus 8 x Gigabit RJ45 ports for versatile networking.
- **Easy deployment:** Plug-and-play, DIN rail mountable, compact size for quick deployment.

## Key Technical Specifications

| Parameter             | Specification                                                |
|-----------------------|--------------------------------------------------------------|
| Type                  | Layer 2 Unmanaged Industrial Ethernet Switch                 |
| Ports                 | 2 x 100/1000BaseX SFP + 8 x 10/100/1000BaseT                 |
| Switching Performance | 20 Gbps backplane, Store-and-Forward, 4K MAC                 |
| Dimensions / Weight   | 52 × 140 × 110 mm (2.05 × 5.51 × 4.33 in) / 0.7 kg (1.54 lb) |
| Power                 | 18-60 VDC, Redundant dual inputs                             |
| Environment           | -40 °C ~ +75 °C (-40 °F ~ +167 °F) operating; IP40           |
| EMC                   | IEC 61000-4-2/3/4/5/6 Class 3-4, IEC 61000-4-9 Class 5       |
| Certifications        | CE, FCC                                                      |

## 2. Product Dimensions

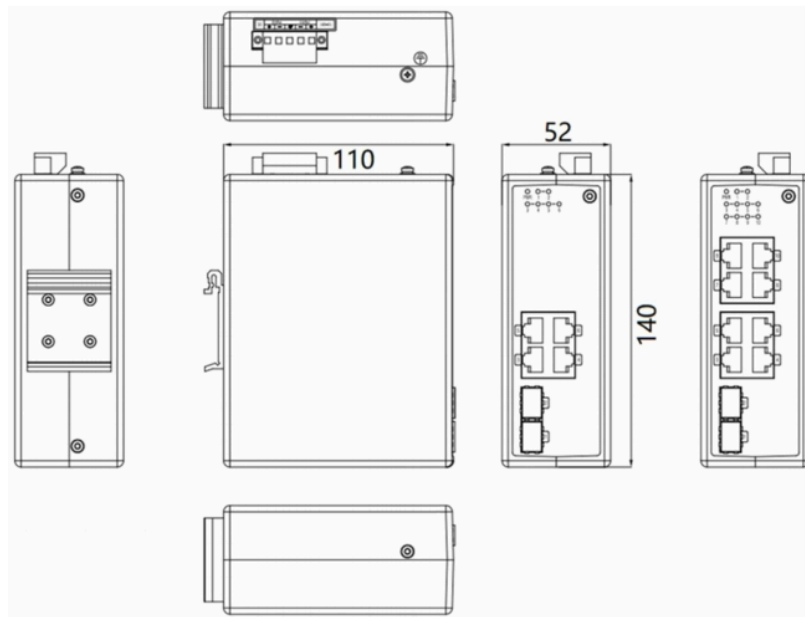

ISE5010D

### Note:

1. All dimensions are in millimeters (mm), with inches (in) in parentheses.
2. All dimensions are approximate and **for reference only**.
3. The dimensions shown in the figure **shall not be used for production or processing**.
4. Dimensions must comply with part and manufacturing tolerance requirements.
5. Dimensions are subject to change without notice.

## 3. Hardware Specifications

| Category/Parameter          | Specification                           |
|-----------------------------|-----------------------------------------|
| <b>Physical Performance</b> |                                         |
| Enclosure                   | Fully enclosed seamless metal enclosure |
| Dimensions (W × D × H)      | 52 mm × 140 mm × 110 mm                 |
| Weight                      | 0.7 kg (1.54 lb)                        |

| Category/Parameter                     | Specification                                                                                                                                                        |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mounting Method                        | DIN-rail mounting                                                                                                                                                    |
| Cooling Method                         | Fanless cooling                                                                                                                                                      |
| Protection Grade                       | IP40                                                                                                                                                                 |
| Storage Temperature                    | -40 °C ~ +85 °C (-40 °F ~ +185 °F)                                                                                                                                   |
| Operating Temperature                  | -40 °C ~ +75 °C (-40 °F ~ +167 °F)                                                                                                                                   |
| Humidity                               | 5 ~ 95% (non-condensing)                                                                                                                                             |
| <b>Hardware Performance</b>            |                                                                                                                                                                      |
| Backplane Bandwidth                    | 20 Gbps                                                                                                                                                              |
| Processing Type                        | Store-and-Forward                                                                                                                                                    |
| MAC Table Size                         | 4K                                                                                                                                                                   |
| Packet Buffer Size                     | 1.5 Mbits                                                                                                                                                            |
| Exchange Rate                          | 148,800 pps / 100M ports; 1,488,000 pps / 1000M ports                                                                                                                |
| <b>Power Parameters</b>                |                                                                                                                                                                      |
| Operating Voltage                      | 18-60 VDC, Redundant dual inputs                                                                                                                                     |
| Protection                             | Overload Current Protection, Reverse Polarity Protection                                                                                                             |
| <b>Electromagnetic Characteristics</b> |                                                                                                                                                                      |
| EMS                                    | IEC(EN)61000-4-2, Class 4; IEC(EN)61000-4-3, Class 3<br>IEC(EN)61000-4-4, Class 4; IEC(EN)61000-4-5, Class 4<br>IEC(EN)61000-4-6, Class 3; IEC(EN)61000-4-9, Class 5 |



| Category/Parameter       | Specification |
|--------------------------|---------------|
| <b>Certifications</b>    |               |
| Certifications           | CE, FCC       |
| <b>Quality Assurance</b> |               |
| Warranty Period          | 5 years       |
| MTBF                     | 35 years      |

## 4. Ordering Guide

| Model                   | Description                                                                                                                                                                                                                                       |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ISE5010D-P-2GSFP-8GT-24 | Layer 2 unmanaged Industrial Switch. 2 100/1000BaseX SFP Ports (SFP module not included), 8 10/100/1000 BaseT Ports. IP40 Protection Class, Operating Temperature from -40 °C to +75 °C (-40 °F to +167 °F). Isolated Dual 18-60VDC Power Inputs. |

## 5. Contact Us

- Website: [InHand Networks](https://www.inhandnetworks.com)
- Copyright: ©InHand Networks All rights reserved