

Simple, highly reliable network communication
system



ISE5306D PoE Unmanaged Industrial Ethernet Switch

· Public Utility

· Smart Manufacturing

· Smart City

· Smart Energy

1. Product Overview

The ISE5306D is designed for power, transportation, industrial control, and demanding environments.


Product Features:

- **Robust Design:** Fanless, wide-temperature and wide-voltage, protected industrial circuits.
- **Easy Deployment:** Plug-and-play function, DIN rail mountable, compact size.
- **PoE Support:** IEEE 802.3af/at PSE, up to 30W output power per port.
- **High Reliability:** Redundant dual input power design, excellent EMC compatibility.
- **Certifications:** Complies with FCC, CE, ROHS standards for diverse industries.

Key Technical Specifications

Parameter	Specification
Type	Layer 2 unmanaged, plug-and-play
Ports	2×SFP + 4×Gigabit RJ45 (IEEE 802.3af/at PoE, up to 30 W per port)
Switching	Store-and-forward, 20 Gbps backplane, 4K MAC
Dimensions / Weight	52 × 140 × 110 mm (W × D × H), 0.7 kg (1.54 lb)
Power	Redundant dual inputs: 48–54 VDC
Environment	-40 °C ~ +75 °C (-40 °F ~ +167 °F); IP30
EMC	IEC 61000-4-x, Class 3–5
Certifications	CE, FCC; MTBF 35 years; 5-year warranty

2. Product Dimensions

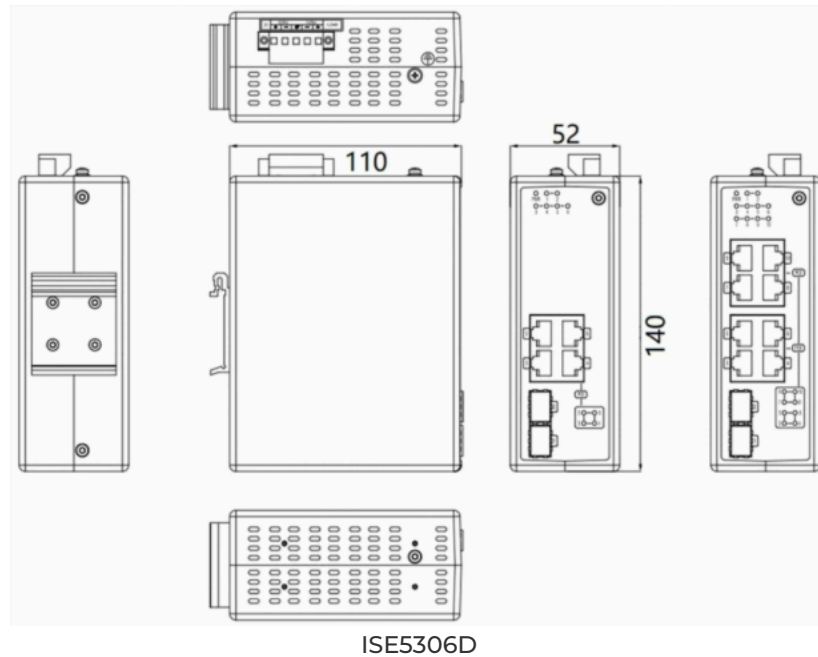

Note:

1. All dimensions are in millimeters (mm), with inches (in) in parentheses.
2. All dimensions are approximate and **for reference only**.
3. The dimensions shown in the figure **shall not be used for production or processing**.
4. Dimensions must comply with part and manufacturing tolerance requirements.
5. Dimensions are subject to change without notice.

3. Hardware Specifications

Category/Parameter	Specification
PoE	
PoE 10/100/1000 BaseT Ports	4 ports
Maximum Power	15.4W (IEEE 802.3af) / 30W (IEEE 802.3at)
Physical Performance	

Category/Parameter	Specification
Enclosure	Fully enclosed seamless metal enclosure
Dimensions (W × D × H)	52 mm × 140 mm × 110 mm
Weight	0.7 kg (1.54 lb)
Mounting Method	DIN-rail mounting
Protection Grade	IP30
Cooling Method	Fanless cooling
Storage Temperature	-40 °C ~ +85 °C (-40 °F ~ +185 °F)
Operating Temperature	-40 °C ~ +75 °C (-40 °F ~ +167 °F)
Humidity	5 ~ 95% (non-condensing)
Hardware Performance	
Backplane Bandwidth	20 Gbps
Processing Type	Store-and-Forward
MAC Table Size	4K
Packet Buffer Size	2 Mbits
Exchange Rate	148,800 pps / 100M ports; 1,488,000 pps / 1000M ports
Power Parameters	
Operating Voltage	48-54 VDC, Redundant dual inputs
Protection	Overload Current Protection, Reverse Polarity Protection



Category/Parameter	Specification
Electromagnetic Characteristics	
EMS	IEC(EN)61000-4-2, Class 4; IEC(EN)61000-4-3, Class 3 IEC(EN)61000-4-4, Class 4; IEC(EN)61000-4-5, Class 4 IEC(EN)61000-4-6, Class 3; IEC(EN)61000-4-9, Class 5
Certifications	
Certifications	CE, FCC
Quality Assurance	
Warranty Period	5 years
MTBF	35 years

4. Ordering Guide

Model	Description
ISE5306D-P-2GSFP-4GT-48	Layer 2 unmanaged Industrial Switch. 2 100/1000BaseX SFP Ports (SFP module not included), 4 802.3af/at PoE 10/100/1000 BaseT Ports. IP30 Protection Class, Operating Temperature from -40 °C to +75 °C (-40 °F to +167 °F). Isolated Dual 48-54VDC Power Inputs.

5. Contact Us

- Website: [InHand Networks](https://www.inhand-networks.com)
- Copyright: ©InHand Networks All rights reserved