

Simple, highly reliable network communication system



ISE5310D PoE Industrial Switch

· Plug-and-play

· DIN-rail

· Fanless

· IP30

1. Product Overview

ISE5310D is designed specifically for power, transportation, industrial control, and other demanding industrial environments.

Features:


- **Robust design:** Robust metal casing, fanless design, and industrial-grade power supply design.
- **Wide adaptability:** Wide-temperature (-40 ~ +75°C) and wide-voltage design (48-54VDC).
- **International standard:** Complies with FCC, CE, ROHS standards and Excellent EMC.
- **PoE support:** Supports IEEE 802.3af/at PSE, up to 30W output power per port.
- **Easy deployment:** Plug-and-play, DIN rail mountable, compact size for quick deployment.

Key Technical Specifications

Parameter	Specification
Type	Layer 2 Unmanaged Industrial Ethernet Switch
Ports	2 x 100/1000BaseX SFP + 8 x 10/100/1000BaseT PoE (802.3af/at)
Switching Performance	20 Gbps backplane, Store-and-Forward, 4K MAC
Dimensions / Weight	52 × 140 × 110 mm (2.05 × 5.51 × 4.33 in) / 0.7 kg (1.54 lb)
Power	48-54 VDC, Redundant dual inputs
Environment	-40 °C ~ +75 °C (-40 °F ~ +167 °F) operating; IP30
EMC	IEC 61000-4-2/3/4/5/6 Class 3-4, IEC 61000-4-9 Class 5

Parameter	Specification
Certifications	CE, FCC

2. Product Dimensions

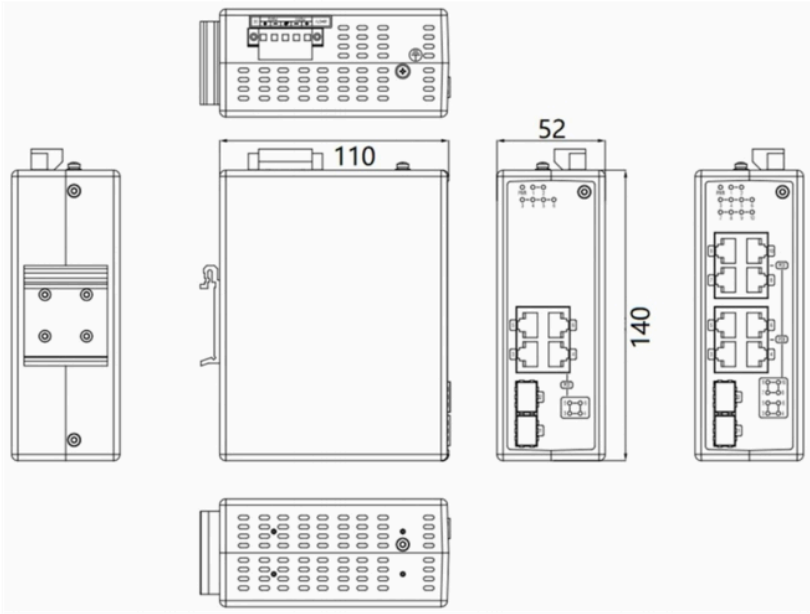

ISE5310D

- Note:
1. All dimensions are in millimeters (mm), with inches (in) in parentheses.
 2. All dimensions are approximate and **for reference only**.
 3. The dimensions shown in the figure **shall not be used for production or processing**.
 4. Dimensions must comply with part and manufacturing tolerance requirements.
 5. Dimensions are subject to change without notice.

3. Hardware Specifications

Category/Parameter	Specification
PoE	
PoE 10/100/1000 BaseT Ports	8 ports
Maximum Power	15.4W (IEEE 802.3af) / 30W (IEEE 802.3at)
Physical Performance	
Enclosure	Fully enclosed seamless metal enclosure
Dimensions (W × D × H)	52 mm × 140 mm × 110 mm
Weight	0.7 kg (1.54 lb)
Mounting Method	DIN-rail mounting
Cooling Method	Fanless cooling
Protection Grade	IP30
Storage Temperature	-40 °C ~ +85 °C (-40 °F ~ +185 °F)
Operating Temperature	-40 °C ~ +75 °C (-40 °F ~ +167 °F)
Humidity	5 ~ 95% (non-condensing)
Hardware Performance	
Backplane Bandwidth	20 Gbps

Category/Parameter	Specification
Processing Type	Store-and-Forward
MAC Table Size	4K
Packet Buffer Size	2 Mbits
Exchange Rate	148,800 pps / 100M ports; 1,488,000 pps / 1000M ports
Power Parameters	
Operating Voltage	48-54 VDC, Redundant dual inputs
Protection	Overload Current Protection, Reverse Polarity Protection
Electromagnetic Characteristics	
EMS	IEC(EN)61000-4-2, Class 4; IEC(EN)61000-4-3, Class 3 IEC(EN)61000-4-4, Class 4; IEC(EN)61000-4-5, Class 4 IEC(EN)61000-4-6, Class 3; IEC(EN)61000-4-9, Class 5
Certifications	
Certifications	CE, FCC
Quality Assurance	
Warranty Period	5 years
MTBF	35 years

4. Ordering Guide

Model	Description
ISE5310D-P-2GSFP-8GT-48	Layer 2 unmanaged Industrial Switch. 2 100/1000BaseX SFP Ports (SFP module not included), 8 802.3af/at PoE 10/100/1000 BaseT Ports. IP30 Protection Class, Operating Temperature from -40 °C to +75 °C (-40 °F to +167 °F). Isolated Dual 48-54VDC Power Inputs.

5. Contact Us

- Website: [InHand Networks](https://www.inhand-networks.com)
- Copyright: ©InHand Networks All rights reserved