


High-Performance, Stable, ARM Industrial Computer

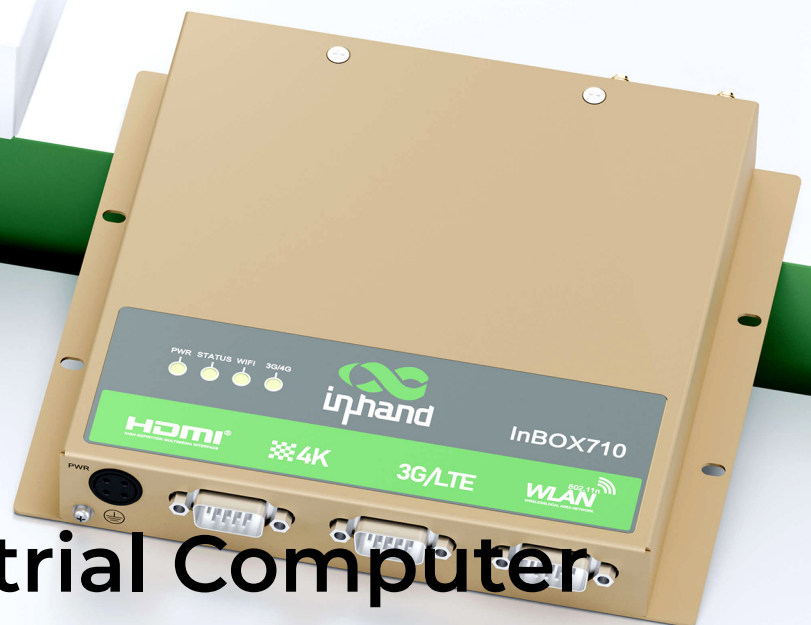

InBOX710 Industrial Computer

· 4G/Wi-Fi/BT

· Android/Linux

· 4K HDMI

· EMC Level 3

1. Product Overview

InBOX710 is a 4G high-performance ARM industrial computer with rich peripheral interfaces, designed for data integration and equipment networking in industrial and commercial sectors.

Key Features:


- **High Performance:** RK3399 six-core processor at 1.8 GHz, 2 GB RAM / 16 GB storage
- **Multi-OS Support:** Optional Android or Linux (Debian) operating systems, deeply optimized for stability
- **Rich Interfaces:** RS-232, RS-485, USB 2.0/3.0, HDMI 2.0 (4K), Ethernet, Bluetooth 4.2
- **Industrial Reliability:** Metal housing, IP40, fanless, -20 °C ~ 70 °C (-4 °F ~ 158 °F) wide temperature, EMC Level 3 protection
- **Seamless Connectivity:** 4G, Wi-Fi, and wired network with multi-level link detection

Core Specifications

Specification	Details
CPU	RK3399, 6-Core, 1.8 GHz
OS	Android / Linux (Debian 9)
RAM / Storage	2 GB / 16 GB eMMC
Wi-Fi	802.11b/g/n, Client/AP Mode
Bluetooth	Bluetooth 4.2
Video Output	HDMI 2.0, up to 4K@60fps
Ethernet	1 × 10/100 Mbps
Serial	2 × RS-232, 1 × RS-232/RS-485

Specification	Details
USB	2 × USB 2.0, 1 × USB 3.0
Power Input	12 V DC
Working Temperature	-20 °C ~ 70 °C (-4 °F ~ 158 °F)
Dimensions	170 × 150 × 26 mm (6.69 × 5.91 × 1.02 in)

2. Product Dimensions

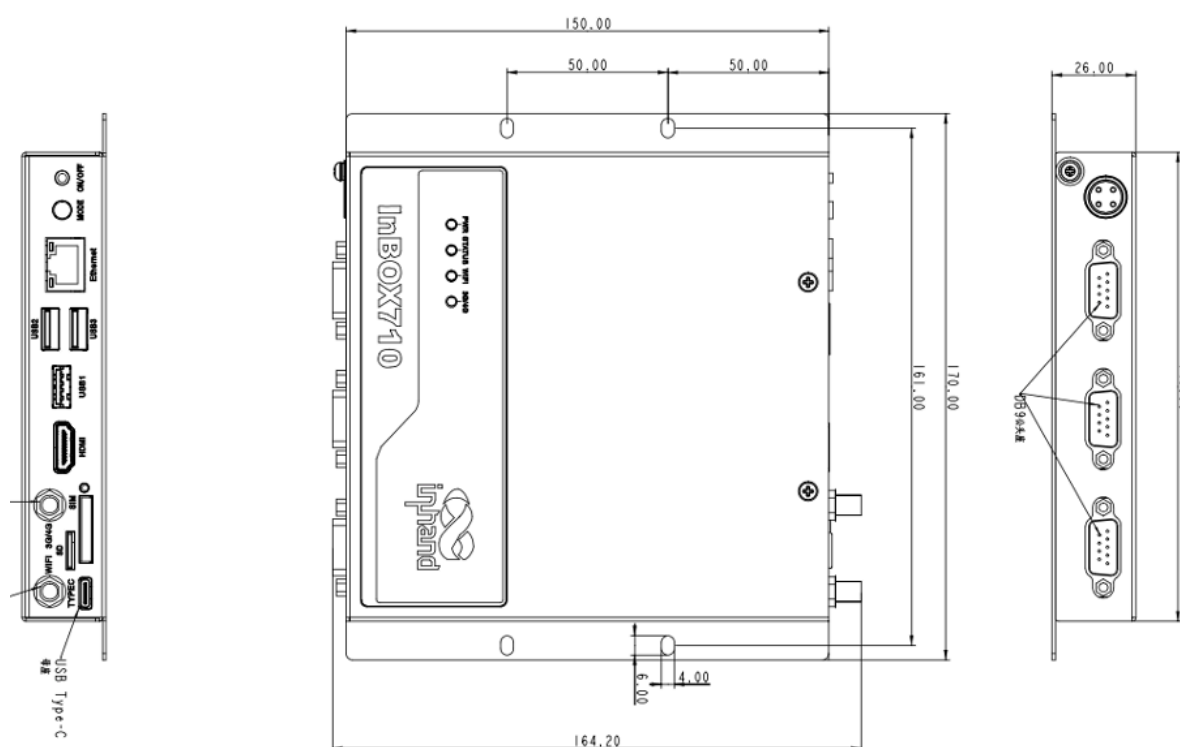

Note:

1. All dimensions are in millimeters (mm), with inches (in) in parentheses.
2. All dimensions are approximate, for reference only.
3. Illustrated dimensions **must not be used for production processing**.
4. Dimensions must comply with component and manufacturing tolerances.
5. Dimensions are subject to change without notice.

3. Hardware Specifications

Category / Parameter	Specification
Processor	
CPU	RK3399, 6-Core, 1.8 GHz
RAM	2 GB
FLASH	16 GB eMMC
Interfaces	
Ethernet	1 × 10/100 Mbps, WAN/LAN
Serial	2 × RS-232 (DB9); 1 × RS-232/RS-485 (DB9)
USB	2 × USB 2.0; 1 × USB 3.0
HDMI	1 × HDMI 2.0, up to 4096 × 2160 (4K), with audio
Debug	1 × Type-C
SIM	1 × Drawer-type SIM card holder
SD	1 × Drawer-type SD card holder
Antenna	1 × SMA (3G/4G); 1 × RP-SMA (Wi-Fi)
Buttons	1 × Power Button; 1 × Mode Key
Connectivity	
Cellular	4G LTE
Wi-Fi	802.11b/g/n, Client/AP Mode
Bluetooth	Bluetooth 4.2
Power	
Power Input	12 V DC (self-lock four-core circular interface)
Power Consumption	< 10 W (without peripherals)

Category / Parameter	Specification
Mechanical	
Dimensions (W × D × H)	170 × 150 × 26 mm (Including installation parts)
Installation	Wall Mounting
Protection Rating	IP40
Housing	Metal
Cooling	Fanless
Environmental	
Working Temperature	-20 °C ~ 70 °C (-4 °F ~ 158 °F)
Storage Temperature	-40 °C ~ 85 °C (-40 °F ~ 185 °F)
Humidity	5 ~ 95% (non-condensing)
Reliability	
RTC	Embedded RTC with button battery
EMC	
ESD	Level 3
EFT	Level 3
Surge	Level 3
Indicators	
Power LED	Always on after power on
Status LED	Flashing during normal operation
Wi-Fi LED	Always on when connected normally
3G/4G LED	Always on when connected normally

Category / Parameter	Specification
Certification	
Certification	CCC, CE, FCC, IC

4. Software Specifications

Category / Parameter	Specification
Operating System	
OS	Linux (Debian 9) / Android
Network	
Network	4G
Wi-Fi	802.11b/g/n, Client/AP Mode
Bluetooth	Bluetooth 4.2
Graphics Processing	
Processing Power	Dual ISP up to 800 MPix/s, supports dual camera data input, 3D and depth information extraction
Video Codec	H.265/H.264/VP9 4K@60fps HD video decoding
Image Processing	BMP, JPG, PNG, GIF
Configuration Management	
Timer Switch	Supported
Upgrade	Local USB upgrade

5. Ordering Information

Model Code

Model code: InBOX710-<WMNN>-<STD/PLAT/L>-<A>-<S>

<WMNN>: Cellular Networks

<STD/PLAT/L>: OS (STD = Android, L = Debian)

<A>: Reserved

<S>: Serial Port Type (485 = RS-485 included)

Product Models

Model	Region	<WMNN>: Cellular Networks	<STD/PLAT/L>	<S>
InBOX710-DQ20-L/STD	China	LTE-FDD: B1/B3/B5/B8 LTE-TDD: B34/B38/B39/B40/B41 WCDMA: B1/B8 TD-SCDMA: B34/B39 CDMA/EVDO: BC0 GSM/EDGE: 900/1800 MHz	L: Debian STD: Android	—
InBOX710-DQ20-L/STD-485	China	LTE-FDD: B1/B3/B5/B8 LTE-TDD: B34/B38/B39/B40/B41 WCDMA: B1/B8 TD-SCDMA: B34/B39 CDMA/EVDO: BC0 GSM/EDGE: 900/1800 MHz	L: Debian STD: Android	RS-485 × 1
InBOX710-FQ58-L/STD	EMEA	LTE-FDD: B1/B3/B7/B8/B20/B28A WCDMA: B1/B8 GSM/EDGE: B3/B8	L: Debian STD: Android	—
InBOX710-FQ58-L/STD-485	EMEA	LTE-FDD: B1/B3/B7/B8/B20/B28A WCDMA: B1/B8 GSM/EDGE: B3/B8	L: Debian STD: Android	RS-485 × 1
InBOX710-FQ39-L/STD	North America	LTE-FDD: B2/B4/B5/B7/B12/B13/B25/B26/B29 /B30/B66 WCDMA: B2/B4/B5	L: Debian STD: Android	—

InBOX710-FQ39-L/STD-485	North America	LTE-FDD: B2/B4/B5/B7/B12/B13/B25/B26/B29 /B30/B66 WCDMA: B2/B4/B5	L: Debian STD: Android	RS-485 × 1
InBOX710-EN00-L/STD	Global	—	L: Debian STD: Android	—
InBOX710-EN00-L/STD-485	Global	—	L: Debian STD: Android	RS-485 × 1

6. Contact Us

- Website: InHand Networks
- Copyright: ©InHand Networks. All Rights Reserved.