

10.1" All-in-One Android Tablet



InPAD3101 Industrial Tablet

· 10.1" Touch Screen

· IP65 Front

· Android 7.1

· 4G/Wi-Fi/BT

1. Product Overview

InPAD3101 is a 10.1-inch all-in-one Android industrial tablet with high-brightness capacitive touch screen and rich interfaces for human-machine interaction in industrial and commercial settings.

Key Features:


- **10.1" Industrial Display:** High-brightness 450 cd/m² capacitive touch screen, 1280 × 800 resolution, full viewing angle, IP65 front panel
- **Flexible OS:** Android 7.1 operating system, deeply optimized for long-term application stability
- **Rich Interfaces:** 2 × RS-232, 2 × RS-485, 4 × USB 2.0, Ethernet, audio output for peripheral expansion
- **Industrial Reliability:** Metal housing, fanless, -10 °C ~ 60 °C (14 °F ~ 140 °F), EMC protection, watchdog, auto-start on power
- **Seamless Connectivity:** 4G, Wi-Fi 802.11b/g/n, Bluetooth 4.2 for flexible network access

Core Specifications

Specification	Details
CPU	RK3288 Quad-Core Cortex-A17, 1.6 GHz
OS	Android 7.1
RAM / Storage	2 GB / 8 GB
Display	10.1" 1280 × 800, 450 cd/m ² , Capacitive Touch
Wi-Fi	802.11b/g/n, Client/AP Mode
Bluetooth	Bluetooth 4.2
Ethernet	1 × 10/100 Mbps
Serial	2 × RS-232, 2 × RS-485

Specification	Details
USB	4 × USB 2.0
Front Protection	IP65
Working Temperature	-10 °C ~ 60 °C (14 °F ~ 140 °F)
Dimensions	258 × 172 × 36 mm (10.16 × 6.77 × 1.42 in)

2. Product Dimensions

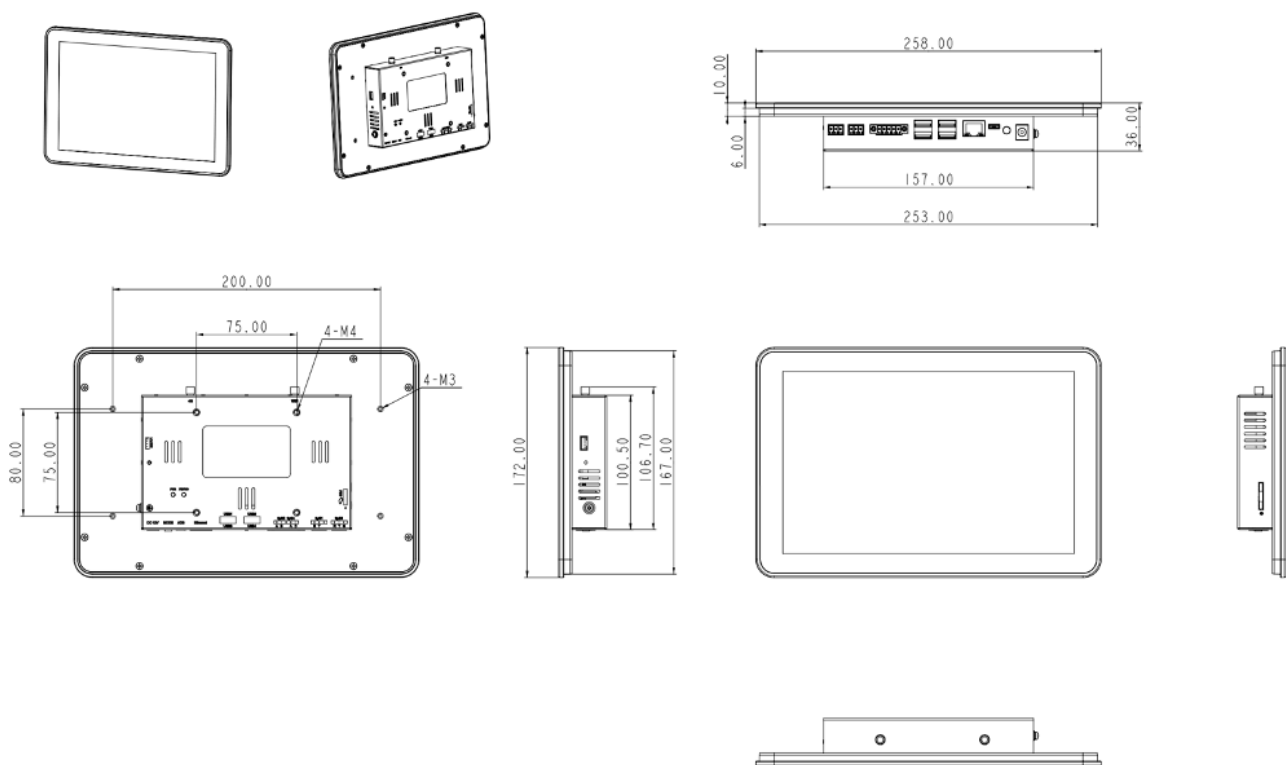

Note:

1. All dimensions are in millimeters (mm), with inches (in) in parentheses.
2. All dimensions are approximate, **for reference only**.
3. Illustrated dimensions **must not be used for production processing**.
4. Dimensions must comply with component and manufacturing tolerances.
5. Dimensions are subject to change without notice.

3. Hardware Specifications

Category / Parameter	Specification
Processor	
CPU	RK3288 Quad-Core Cortex-A17, 1.6 GHz
RAM	2 GB
FLASH	8 GB
Display	
Size	10.1"
Resolution	1280 × 800
Brightness	450 cd/m ² (typ.)
Contrast	800:1
Viewing Angle	Full viewing angle
Touch Screen	Capacitive touch screen
Interfaces	
Ethernet	1 × 10/100 Mbps, WAN/LAN
Serial	2 × RS-232 (3-pin terminal, 3.5mm pitch, no flange, ttyS1/ttyS3) 2 × RS-485 (5-pin terminal, 3.5mm pitch, with flange, ttyS2/ttyS4)
USB	4 × USB 2.0
SIM	1 × Standard SIM
Antenna	1 × SMA (4G); 1 × RP-SMA (Wi-Fi)

Category / Parameter	Specification
Audio	1 × SPK, 2-channel 8-ohm 5W speaker output (2.0mm 4Pin)
Debug	1 × ADB
Buttons	1 × Power Button (long press restart, short press reboot UI); 1 × Mode Key
Connectivity	
Cellular	4G LTE
Wi-Fi	802.11b/g/n, Client/AP Mode
Bluetooth	Bluetooth 4.2
Power	
Power Input	12 V DC (circular interface), auto-start on power
Power Consumption	< 10 W
Mechanical	
Dimensions (W × D × H)	258 × 172 × 36 mm (10.16 × 6.77 × 1.42 in)
Installation	Wall Mounting
Protection Rating	IP65 (front screen)
Housing	Metal
Cooling	Fanless
Environmental	
Working Temperature	-10 °C ~ 60 °C (14 °F ~ 140 °F)
Storage Temperature	-40 °C ~ 85 °C (-40 °F ~ 185 °F)

Category / Parameter	Specification
Humidity	5 ~ 95% (non-condensing)
Reliability	
RTC	Built-in Real Time Clock (RTC)
Watchdog	Supported
EMC	
ESD	Level 2
EFT	Level 2
Surge	Level 2
Indicators	
Power LED	Always on after power on
Status LED	Blinking during normal operation
Certification	
Certification	CE

4. Software Specifications

Category / Parameter	Specification
Operating System	
OS	Android 7.1
Network	
Network	4G
Wi-Fi	802.11b/g/n, Client/AP Mode

Category / Parameter	Specification
Bluetooth	Bluetooth 4.2
Graphics Processing	
Multimedia	4K 10-bit H.265/H.264 video decoding; 1080P multi-format decoding (VC-1, MPEG-1/2/4, VP8); 1080P video encoding (H.264, VP8); Video post processor: de-interlacing, denoising, edge/detail/color optimization
Applications	
Application Software	Compatible with Android OS applications
Configuration Management	
Upgrade	Local USB upgrade

5. Ordering Information

Model Code

Model code: InPAD3101-<WMNN>-<STD/PLAT/L>-<A>-<S>

<WMNN>: Cellular Networks

<STD/PLAT/L>: OS (STD = Android 7.1)

<A>: Reserved

<S>: Serial Port Type

Product Models

Model	Region	<WMNN>: Cellular Networks	<STD/PLAT/L>	<S>
InPAD3101-FQ58-STD	EMEA, South Korea, Thailand, India	LTE-FDD: B1/B3/B7/B8/B20/B28A WCDMA: B1/B8 GSM/EDGE: B3/B8	STD: Android 7.1	—
InPAD3101-FQ39-STD	North America	LTE-FDD: B2/B4/B5/B7/B12/B13/B25/B26/B29/B30/B66 WCDMA: B2/B4/B5	STD: Android 7.1	—
InPAD3101-EN00-STD	Global	—	STD: Android 7.1	—

6. Contact Us

- Website: [InHand Networks](#)
- Copyright: ©InHand Networks. All Rights Reserved.