
InHand Networks

Embrace Edge AI, Empower Intelligent Vision

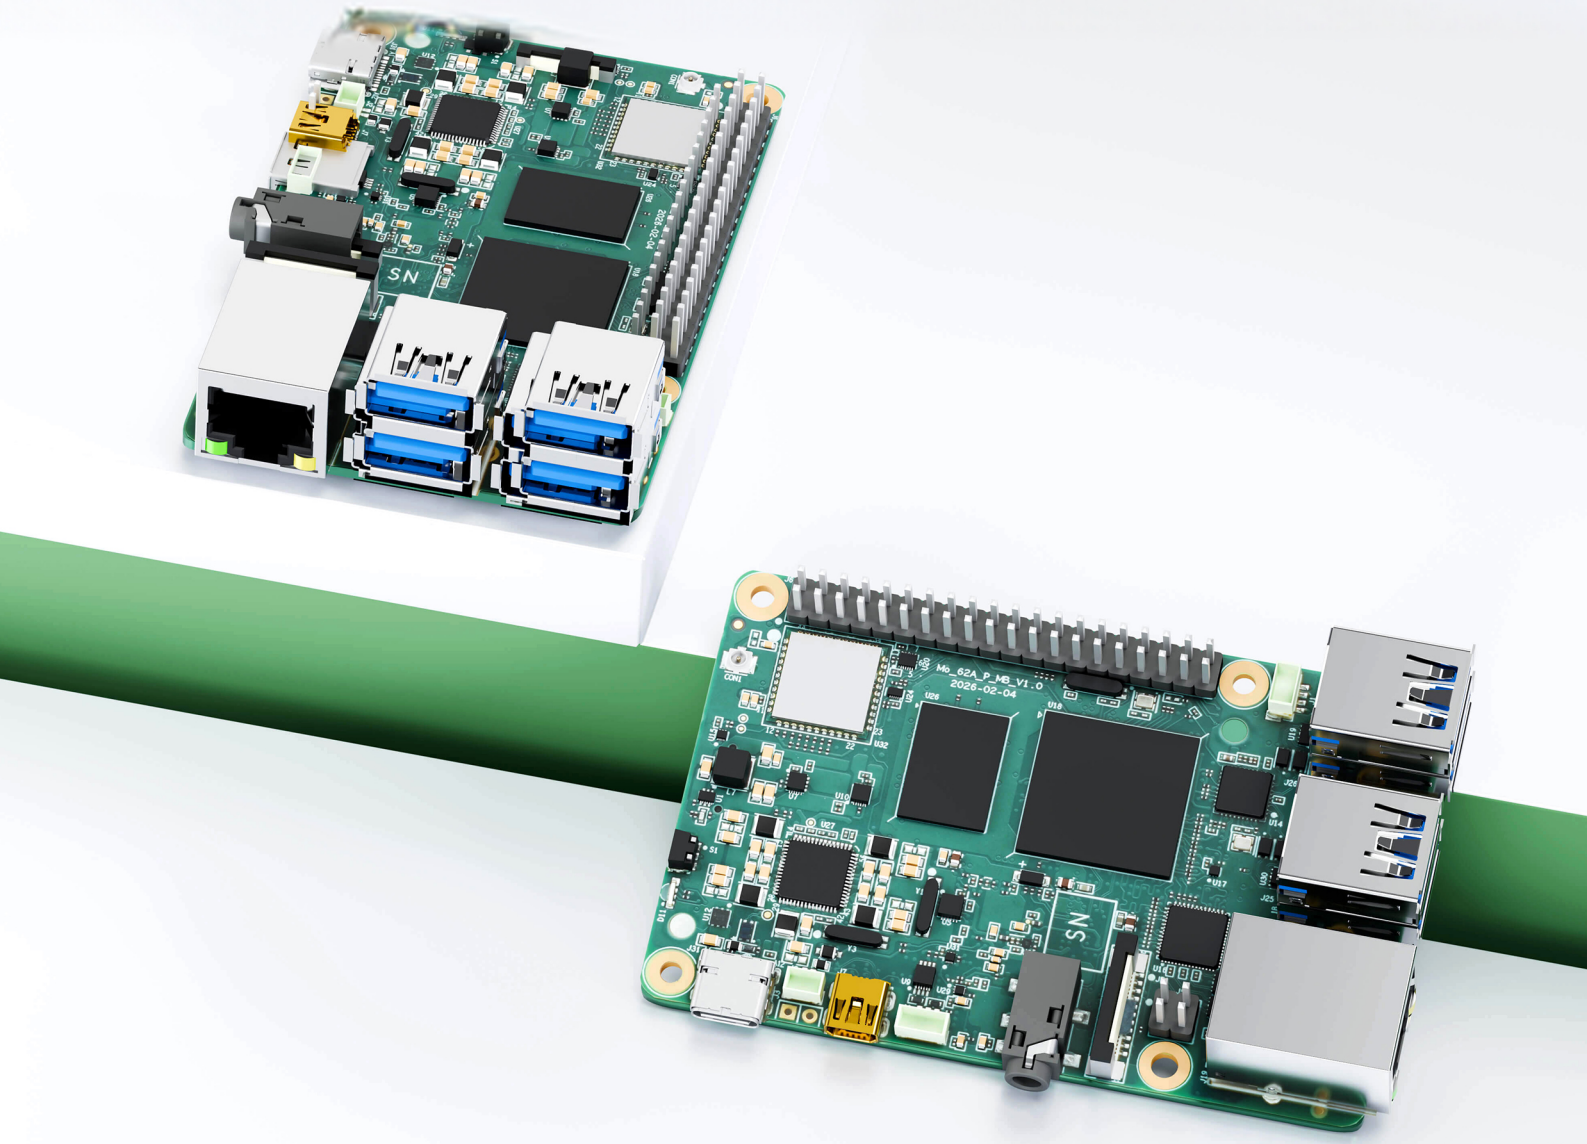

Mo 62A AI Single Board Computer

- Open SDK
- Linux Distribution
- HAT Expansion
- Edge AI

1. Product Overview

The Mo 62A is a 2 TOPS edge AI single-board computer based on the TI AM62A74 SoC, with a form factor compatible with standard SBCs, designed for AI vision and edge inference terminals.

Product Features:


- **AI Acceleration:** Integrated C7x DSP and deep-learning accelerator, 2 TOPS on-device AI inference
- **SBC Compatibility:** Standard SBC form factor, compatible with HAT accessories and mainstream enclosures
- **Rich Interfaces:** Gigabit Ethernet, 4 × USB 2.0, Micro HDMI, MIPI CSI-2
- **Security and Stability:** Secure Boot, TrustZone, OP-TEE, hardware crypto accelerator
- **Open-source Ecosystem:** Debian 13 Linux, open SDK, support for TFLite / ONNX models

Core Technical Specifications


Technical Indicator	Specification
AI Inference	2 TOPS (C7x DSP + DLA)
Operating System	Debian 13.2 (Linux 6.12)
Wi-Fi	Wi-Fi 5 (802.11ac), dual-band 2.4/5 GHz
Bluetooth	BLE 4.2
AI Framework	TI TIDL, supports TFLite / ONNX
Camera	1 × 4-lane MIPI CSI-2
Dimensions	85 × 56 mm
Weight	47 g

Technical Indicator	Specification
Power	USB Type-C 5V/5A DC
Power Consumption	25W (MAX)
Operating Temperature	0 ~ 50 °C
Memory	LPDDR4 2GB (default) / 4GB


2. Product Dimensions

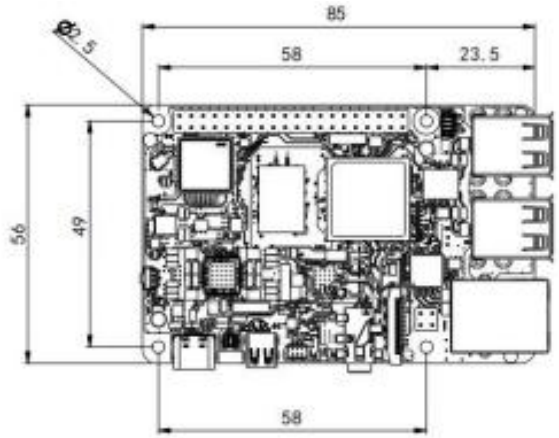

Front View

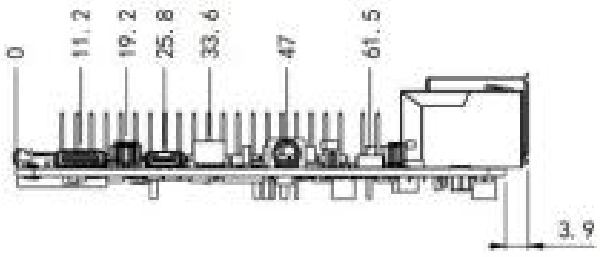

Side View



Interface View

Note:

1. All dimensions are in millimeters (mm).
2. All dimensions are approximate values for **reference only**.
3. The dimensions shown **shall not be used for production or processing**.
4. Dimensions shall comply with part and manufacturing tolerance requirements.
5. Dimensions are subject to change without notice.

3. Hardware Specifications

Category / Parameter	Specification
Hardware Platform	
CPU	TI AM62A74, 4 × Cortex-A53 @ 1.4 GHz
AI Accelerator	C7x DSP + Deep Learning Accelerator, 2 TOPS
ISP / Vision	On-chip ISP + VPAC (RGB-IR, WDR, LDC)
Memory	LPDDR4 2GB (default) / 4GB
Interfaces and Connectivity	
Ethernet	1 × Gigabit Ethernet
USB	4 × USB 2.0 Type-A
Display	1 × Micro HDMI
Camera	1 × 4-lane MIPI CSI-2
Audio	3.5 mm jack + PCM via 40-pin connector
40-pin Connector	GPIO / I²C / SPI / UART / PCM, HAT-compatible
Storage	Micro SD
Debug UART	1 × TTL UART
Fan Connector	1 × 4-pin fan connector
Button	1 × Power button
LED	PWR, USER
Wireless	

Category / Parameter	Specification
Wi-Fi	Wi-Fi 5 (802.11ac), dual-band 2.4/5 GHz
Bluetooth	BLE 4.2
Antenna Connector	Wi-Fi / BLE: on-board snap-on antenna
Security	
Secure Boot	Support (ARM TrustZone + OP-TEE)
Power	
Power Input	USB Type-C 5V/5A DC
Power Consumption	25W (MAX)
Mechanical	
Dimensions	85 × 56 mm
Weight	47 g
Housing	PCB
Cooling	Active fan (optional)
Others	
RTC	Support (battery backup)
Watchdog	Hardware watchdog
Environmental	
Operating Temperature	0 ~ 50 °C
Storage Temperature	-20 ~ 70 °C

4. Software Specifications

Category / Parameter	Specification
Operating System	
OS	Debian 13.2 Trixie
Kernel	Linux Kernel 6.12
AI & Vision	
AI Runtime	TI TIDL, supports TFLite / ONNX
Vision SDK	TI EdgeAI SDK
Camera Framework	V4L2
Display Framework	DRM / KMS
Network Protocol	
IP Application	TCP/UDP, ICMP, DNS, DHCP
IP Routing	Static routing
Security	
Secure Boot	Support
TrustZone	Support
OP-TEE	Support
Crypto Accelerator	Hardware AES-256
Development	
Languages	Python, C/C++
Libraries	OpenCV, GStreamer, NumPy
Package Manager	apt (Debian)
Open SDK	Supports custom system build by customer

Category / Parameter	Specification
System Management	
Remote Access	SSH
Firmware Upgrade	SD card flash
Debug	UART console

5. Ordering Information

Model Code Rule

Model code: MO62A-<DRAM>

MO62A: Base Model

<-DRAM>: Memory

Product Models

Model	Memory
MO62A-2G	2GB
MO62A-4G	4GB

Example
Model: MO62A-2G
Mo 62A board with 2GB memory.

6. Contact Us

- **Official Website:** InHand Networks
- **Copyright Notice:** © InHand Networks. All rights reserved.