InHand Networks

Flexible Deployment. Reliable Connectivity.
One Device. Simpler Outdoor Networking.

ODU302 4G Outdoor Router



4G LTE | IP65 Protection | Fully Integrated Antennas | Three Mounting Options | Multi-Level Network Recovery | Cloud Management

Product Overview

The ODU302 is a 4G cellular router designed to simplify outdoor connectivity. It combines 4G cellular access, integrated omnidirectional antennas, and an IP65-rated enclosure in one device, replacing the conventional combination of a router, external antennas, feeder cables, and a waterproof box.

Top, wall, and pole mounting allow the ODU302 to be installed directly on an equipment cabinet, building exterior, or surveillance pole. This saves cabinet space and reduces cable routing, drilling, and other on-site work.

Link detection, automatic redial, dual-SIM failover, and an embedded watchdog help restore connectivity after a network fault. Device Manager provides centralized management for devices deployed across multiple sites.



Small Parks & Public Facilities



Warehousing & Logistics Parks



Outdoor Equipment Connectivity



Outdoor Video Surveillance



Underground Parking & Other Signal-Limited Areas

Features and Advantages

One Device for a Complete Outdoor Network



4G cellular access, integrated omnidirectional antennas, and an

IP65-rated enclosure eliminate the need for external antennas, feeder cables, and a waterproof box.

Three Mounting Options



Top, wall, and pole mounting fit equipment cabinets, exterior walls, and surveillance poles while reducing cabinet occupancy, drilling, and internal wiring.

Multi-Level Network Recovery



Dual-SIM failover, cellular/wired link backup, heartbeat detection, automatic redial, and an embedded watchdog help switch or restore a failed connection automatically.

Cloud-Based Batch Operations



Device Manager supports remote configuration, firmware upgrades, status monitoring, traffic statistics, fault alerts, and remote reboots.

Redundant PoE + DC Power




IEEE 802.3af PoE and 9–36 VDC wide-voltage input support PoE cabling, low-voltage cabinets, and solar-powered sites.

Enterprise-Grade Secure Connectivity




SPI firewall, DoS protection, ACL, URL filtering, and mainstream VPN protocols such as IPsec, OpenVPN, and WireGuard protect network access and data transmission.


Dimensions and Mounting

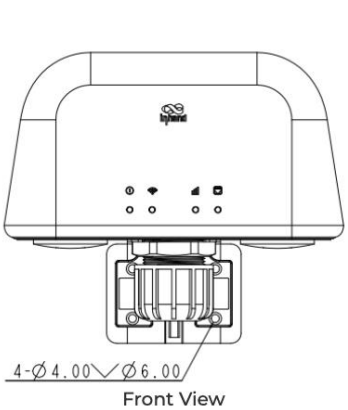


Front View

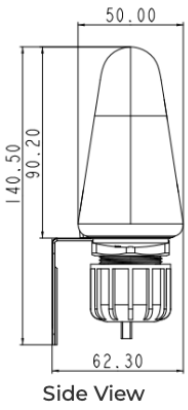

Side View

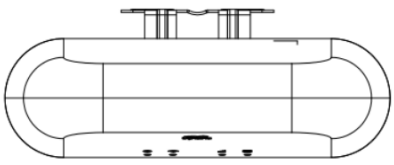


Bottom View




Rear View


Three Mounting Options:



Wall mounting

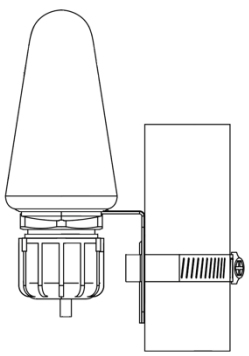

Pole mounting

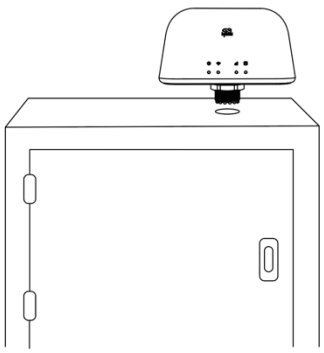

Top mounting

Product Specifications

ODU302 Hardware Specifications	
Hardware Platform	
Processor	580 MHz
Memory	128 MB DDR2 SDRAM
Storage	32 MB SPI NOR Flash
Recommended Users	32
Cellular, Ethernet, and Wireless Connectivity	
4G Module	4G LTE Cat.4, 150 Mbps downlink / 50 Mbps uplink
SIM Slots	2 × Nano SIM, drawer-type slots, dual-SIM failover
Cellular Antennas	2 × integrated 4G antennas
Ethernet Ports	2 × 10/100 Mbps RJ45, configurable WAN/LAN; LAN2 supports PoE input
Wi-Fi	IEEE 802.11 b/g/n, 2.4 GHz, up to 150 Mbps
Wi-Fi Modes	AP / STA
Wi-Fi Antenna	1 × integrated Wi-Fi antenna
Wi-Fi Transmit Power	802.11b: 16 dBm ± 2 dBm at 11 Mbps 802.11g: 16 dBm ± 2 dBm at 54 Mbps 802.11n HT20/HT40 MCS7: 16 dBm ± 2 dBm
Interfaces and Power	
Digital I/O	2 × configurable DI or DO
LED Indicators	System, Wi-Fi, Cellular, Ethernet
Reset Button	1 × pinhole Reset button
DC Input	9–36 VDC through a 4-pin combined power/I/O terminal with overcurrent and reverse-polarity protection
PoE Input	IEEE 802.3af PoE powered
Standby Consumption	90–110 mA @ 12 V
Operating Consumption	280–300 mA @ 12 V
Peak Consumption	340–360 mA @ 12 V
Environmental and Mechanical Specifications	
Protection Rating	IP65
Enclosure	Plastic
Operating Temperature	-40°C to +70°C
Storage Temperature	-40°C to +85°C
Relative Humidity	5%–95%, non-condensing
Dimensions	164 × 50 × 129.7 mm
Weight	Approx. 500 g
Mounting	Wall / Pole / Top mounting

Product Specifications

Reliability and Certifications	
Mechanical Reliability	Shock: IEC 60068-2-27 Vibration: IEC 60068-2-6 Free fall: IEC 60068-2-32
EMC Immunity	EN 61000-4-2 / -4-3 / -4-4 / -4-5 / -4-6 / -4-12: Level 2 EN 61000-4-8: 400 A/m
Certifications & Compliance	Completed: FCC, IC, PTCRB | In Progress: AT&T, Verizon, T-Mobile, CE

Networking and Management

Network Connectivity	
Cellular Networks	Model-dependent support for GSM/GPRS/EDGE, UMTS/HSPA+/EVDO, TD-SCDMA, and FDD LTE/TDD LTE
Network Access	APN, VPDN; CHAP/PAP authentication; always-on, dial-on-demand, and manual dialing
SIM Management	Primary/backup SIM switching; switching on dial failure or low signal; ICCID binding and PIN management
Wired Network	Static IP, DHCP, PPPoE; 2 × configurable WAN/LAN RJ45 ports; NAPT
Wi-Fi 4	2.4 GHz, AP / STA; WPA/WPA2; WEP/TKIP/AES
Link Management, Security, and Local Services	
Link Backup	Cellular and WAN active/standby; ICMP/TCP/DNS probing; fault switchover and automatic redial
VRRP	Dual-router hot standby
Network Recovery	Heartbeat detection, dual-SIM switching, embedded watchdog
Firewall	SPI, DoS protection, ACL, URL filtering, port forwarding, IP-MAC binding, NAPT
VPN	IPsec (IKEv1/v2), L2TP, PPTP, GRE, OpenVPN, WireGuard, ZeroTier, and CA certificates
Traffic Management	Interface-level bandwidth control and IP-based uplink/downlink rate limiting
Local Services	DHCP server/relay/client, DNS relay, DDNS, static routing, and IP Passthrough
Cloud Management and System Maintenance	
Device Manager	Remote status queries, configuration deployment, firmware upgrades, remote reboot, and batch operations
SNMP	SNMP v1/v2c/v3 with Trap alerts
Traffic and Alerts	Traffic thresholds, statistics, and alerts; system reboot, LAN port, and SIM fault alerts
Local Management	Web and CLI (Telnet / SSH / Console), configuration import/export, and factory reset
Logs and Diagnostics	Local/remote logs, power-failure log retention, Ping, Traceroute, and network speed test
SMS	Device status queries and remote reboot by SMS


Product Models

Model	Region	Bands
ODU302-CNC4	China	LTE-FDD: B1/B3/B5/B8 LTE-TDD: B34/B38/B39/B40/B41 WCDMA: B1/B8 GSM: B3/B8 CDMA: BC0 TD-SCDMA: B34/B39
ODU302-NAC4	North America	LTE-FDD: B2/B4/B5/B12/B13/B14/B66/B71 WCDMA: B2/B4/B5
ODU302-EUC4	Europe/Asia-Pacific	LTE-FDD: B1/B3/B5/B7/B8/B20/B28 LTE-TDD: B38/B40/B41 WCDMA: B1/B5/B8 GSM/EDGE: B3/B8

Package Contents

ODU302 Package Contents

ODU302 × 1	1 m RJ45 cable× 1	Mounting kit × 1	Quick Start Guide × 1

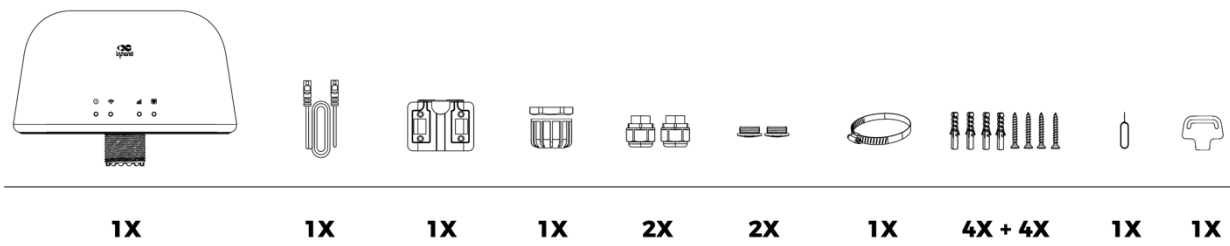


1X	1X	1X	1X	2X	2X	1X	4X + 4X	1X	1X

About InHand Networks

25
Years in IoT

5.4+M
Devices deployed worldwide

60+
Countries using our products

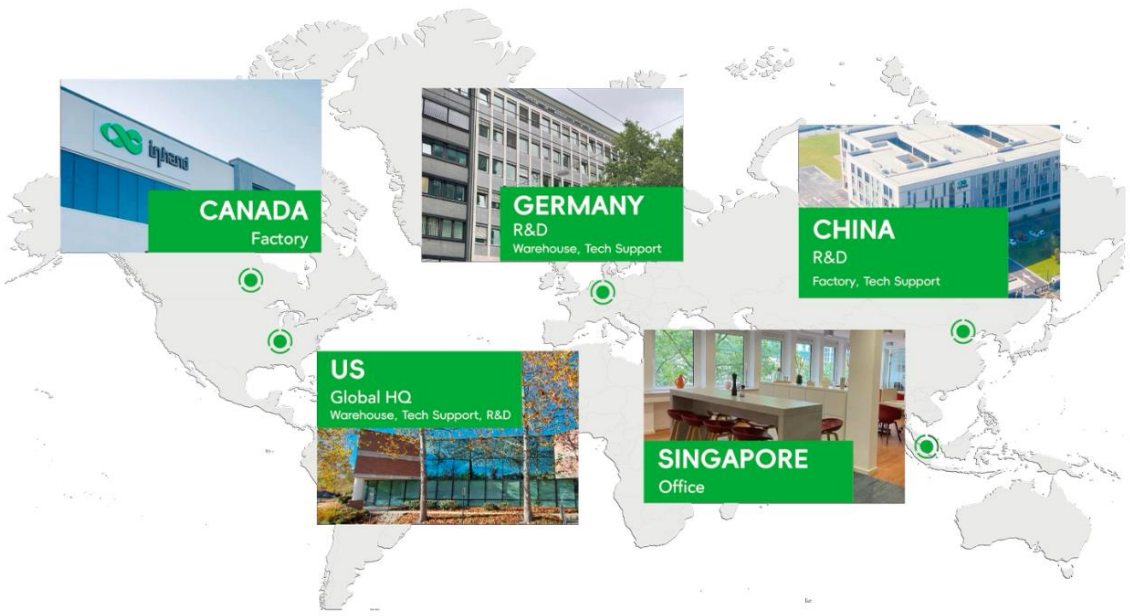

About Us

InHand Networks is a leading IoT solutions provider founded in 2001, dedicated to driving digital transformation across industries and empowering customers to unlock their full potential and achieve accelerated growth.

We specialize in delivering industrial-grade connectivity solutions for diverse sectors, such as enterprise networks, industrial and building IoT, digital energy, smart commerce, and mobility. Our comprehensive product portfolio and services cater to various applications worldwide, including smart manufacturing, smart grid, intelligent transportation, smart retail, etc. With a global footprint spanning over 60 countries, we serve customers in China, the United States, France, Germany, the United Kingdom, Italy, and beyond.

InHand Networks

3650 Concorde Pkwy, Suite 200,
Chantilly, VA 20151, USA
T: +1 (703) 348-2988
E: info@inhand.com
www.inhand.com

File no.: IPC Version 1.0 2025 © 2025 InHand Networks. All rights reserved.
InHand Networks reserves the right to update or modify this document at any time without prior notice.